
3A Fast-Response LDO Regulator

Features

- High-current capability
- 3A over full temperature range
- Low-dropout voltage of 450mV at full load
- Low ground current
- Accurate 1% guaranteed tolerance
- Extremely-fast transient response
- Zero-current shutdown mode
- Error flag signals output out-of-regulation
- Adjustable output voltage
- Packages: TO-263-5、TO-220-5 and TO-252-4

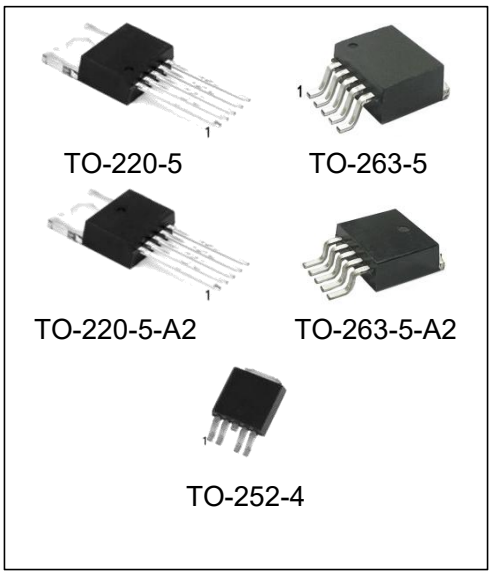

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
MIC29302T	TO-220-5/TO-220-5-A2	MIC29302	TUBE	1000pcs/box
MIC29302S/TR	TO-263-5/TO-263-5-A2	MIC29302	REEL	500pcs/reel
MIC29302MDT/TR	TO-252-4	MIC29302	REEL	2500pcs/reel

General Description

The MIC29302 is a high-current, low-cost, low-dropout voltage regulator which uses Micrel's proprietary Super βeta PNP® process with a PNP pass element. The 3A LDO regulator features 450mV (full load) dropout voltage and very low ground current. Designed for high-current loads, these devices also find applications in lower current, low dropout-critical systems, where their dropout voltage and ground current values are important attributes.


Along with a total accuracy of ±2% (over temperature, line and load regulation) the regulator features very-fast transient recovery from input voltage surges and output load current changes.

The MIC29302 has an adjustable output which can be set by two external resistors to a voltage between 1.24V to 15V. In addition, the device is fully protected against over current faults, reversed input polarity, reversed lead insertion, and overtemperature operation. A TTL logic enable (EN) pin is available in the MIC29302 to shutdown the regulator. When not used, the device can be set to continuous operation by connecting EN to the input (IN). The MIC29302 is available in the standard and 5-pin TO-263 and TO-252 packages with an operating junction temperature range of −40°C to +125°C.

Applications


- Processor peripheral and I/O supplies
- High-efficiency “Green” computer systems
- Automotive electronics
- High-efficiency linear lower supplies
- Battery-powered equipment
- PC add-in cards
- High-efficiency lost-regulator for switching supply

Typical Application

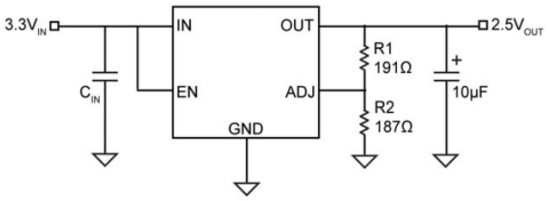


$$V_{OUT}=1.242\times(\frac{R1}{R2}+1)$$


MIC29302 Adjustable Output Regulator

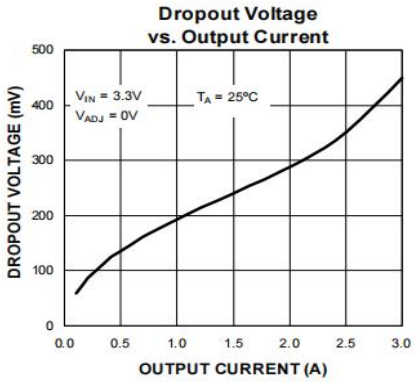


Pin Configuration

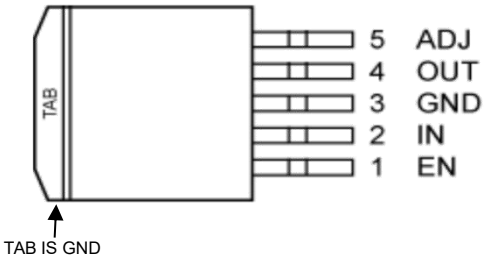

TO-263-5

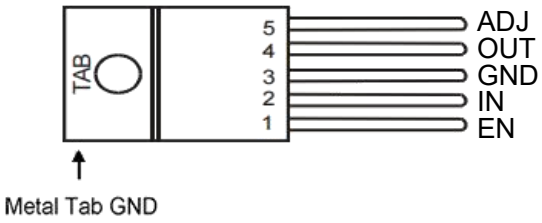

TO-220-5

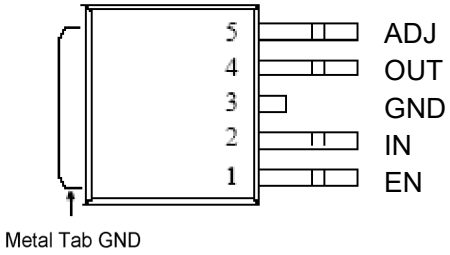

TO-252-4

Pin Description

Pin Number	Pin Name	Pin Name
1	EN	Enable (Input): Active-high CMOS compatible control input. Do not float.
2	IN	INPUT: Unregulated input, +2.8V to +16V maximum
3, TAB	GND	GND: TAB is also connected internally to the IC's ground on both packages.
4	OUT	OUTPUT: The regulator output voltage
5	ADJ	Feedback Voltage: 1.24V feedback from external resistor divider.

Absolute Maximum Ratings(1)

Condition		Min	Max
Input Supply Voltage(VIN)(1)		-20V	+20V
Enable Input Voltage(VEN)		-0.3V	V_{IN}
Lead Temperature (soldering 10sec.)		-	245°C
Power Dissipation		Intemally Limited	
Storage Temperature Range		-65°C	+150°C
ESD Rating ping(3)		-	-
Operating Ratings(2)	Operating Junction Temperature	-40	+125°C
	Operating Input Voltage	3V	16V
Package Thermal Resistance	TO-263 (θJC)		3°C/W

Electrical Characteristics(4)

V_{IN} = 4.2V; I_{OUT} = 100mA; T_A = 25°C, bold values indicate -40°C≤ T_J ≤ +125°C, unless noted.

Parameter	Condition	Min.	Typ.	Max.	Units
Output Voltage					
Output Voltage Accuracy	100mA ≤ IOUT ≤ 3A, (VOUT + 1V) ≤ VIN ≤ 16V	-2		2	%
Line Regulation	IOUT = 100mA, (VOUT + 1V) ≤ VIN ≤ 16V		0.1	0.5	%
Load Regulation	VIN = VOUT + 1V, 100mA ≤ IOUT ≤ 3A		0.2	1	%
Dropout Voltage	ΔVOUT = -1%(6)				mV
	I_{OUT} = 100mA		80	200	
	I_{OUT} = 750mA		220		
	I_{OUT} = 1.5A		275		
	I_{OUT} = 3A		450	800	
Ground Current					
Ground Current	I_{OUT} = 750mA, V_{IN} = V_{OUT} + 1V		5	20	mA
	I_{OUT} = 1.5A		15		
	I_{OUT} = 3A		60	150	
IGRNDDO Ground Pin Current @ Dropout	V_{IN} = 0.5V less than specified V_{OUT}×I_{OUT} = 10mA		2		
Current Limit	V_{OUT} = 0V(7)	3	4		A
e_n, Output Noise Voltage (10Hz to 100kHz	C_L = 10μF		400		μV (rms)
I_L = 100mA	C_L = 33 μF		260		
Ground Pin Current in Shutdown	Input Voltage V_{IN} = 16V		32		μA

Electrical Characteristics(4) (Continued)

V_{IN} = 4.2V; I_{OUT} = 100mA; T_A = 25°C, bold values indicate -40°C≤ T_J ≤ +125°C, unless noted.


Reference					
Reference Voltage	(8)	1.215		1.267	V
Adjust Pin Bias Current			40		nA
				120	
ENABLE Input					
Input Logic Voltage	Low (OFF)			0.8	V
	High (ON)	2.4			
Enable Pin Input Current	VEN = 8V		15	30	μA
				75	
	VEN = 0.8V			2	
				4	
Regulator Output Current in Shutdown	(10)		10		μA
				20	

Notes:


1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.
4. Specification for packaged product only
5. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature change.
6. Dropout voltage is defined as the input-to-output differential when output voltage drops to 99% of its normal value with V_{OUT} + 1V applied to VIN.
7. V_{IN} =V_{OUT} (nominal) + 1V. For example, use V_{IN} = 4.3V for a 3.3Vregulator or use 6V for a 5V regulator. Employ pulse testing procedure for current limit.
8. V_{REF} ≤ V_{OUT} ≤ V_{IN} -1, 3V≤ V_{OUT} ≤16V, 10mA ≤ I_L ≤ I_{FL}, T_J ≤ T_{Jmax}.
9. Thermal regulation is defined as the change in the output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 250mA load pulse at VIN =16V (a 4W pulse) for T= 10ms.
10. V_{EN}≤0.8V, V_{IN}≤16V and V_{OUT} = 0V.

Typical Characteristics


Dropout Voltage vs. Input Voltage

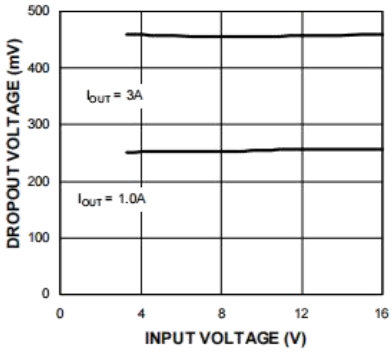


GND Pin Current vs. Input Voltage

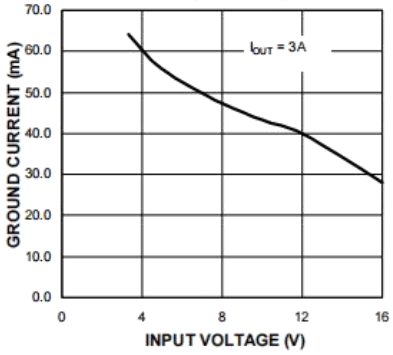


Adjust Pin Voltage vs. Input Voltage

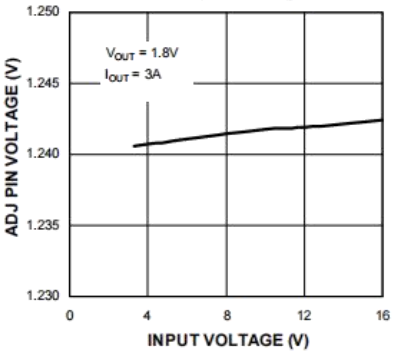


Adjust Pin Current vs. Input Voltage

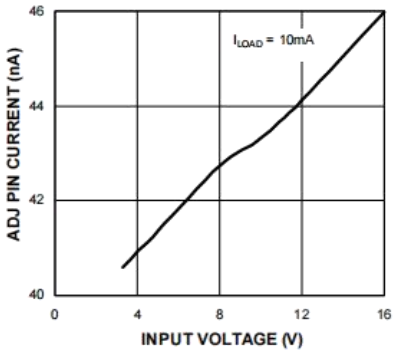


Load Regulation vs. Input Voltage

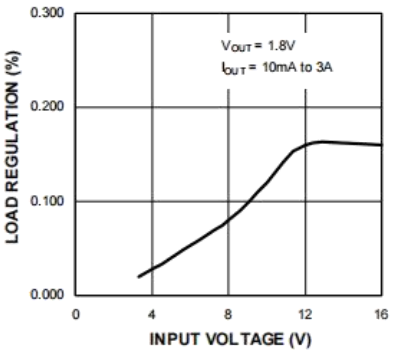


Short-Circuit Current vs. Input Voltage

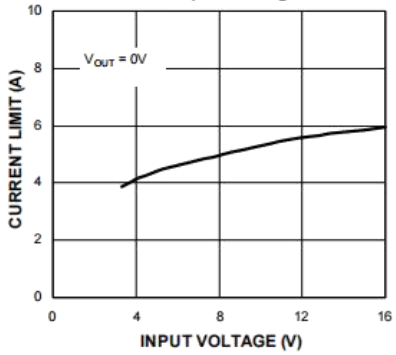

Enable Pin Current vs. Input Voltage

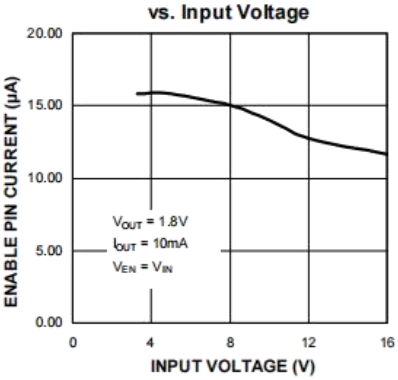


Output Voltage vs. Input Voltage

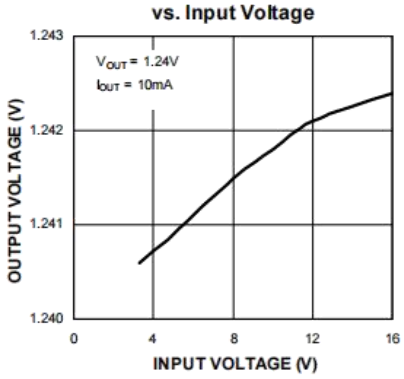


Typical Characteristics (Continued)


GND Pin Current vs. Temperature

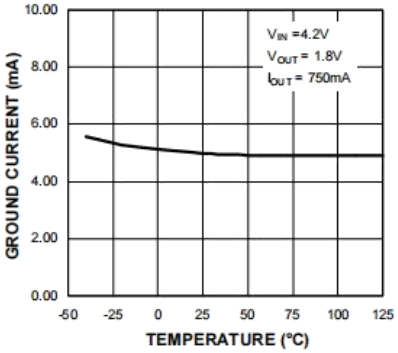


Enable Bias Current vs. Temperature (B06)

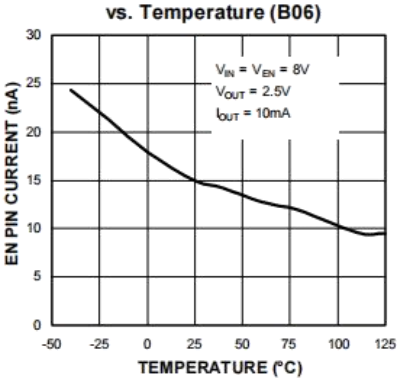


Dropout Voltage vs. Temperature

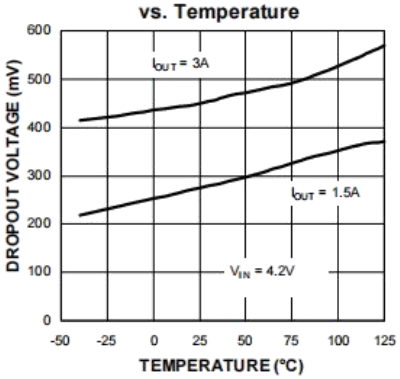


Dropout Voltage vs. Temperature

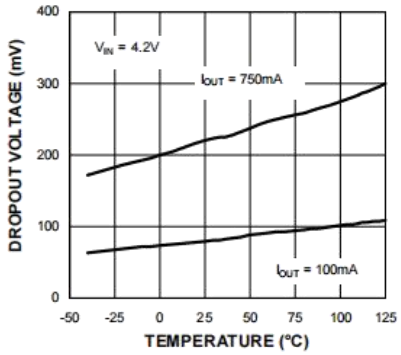


Short-Circuit Current vs. Temperature

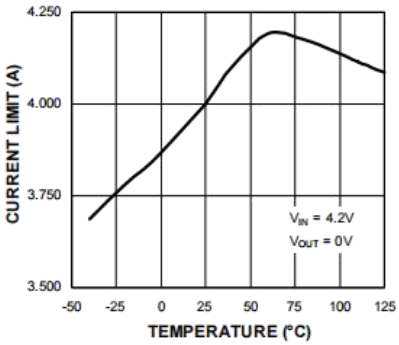


Adjust Pin Voltage vs. Temperature

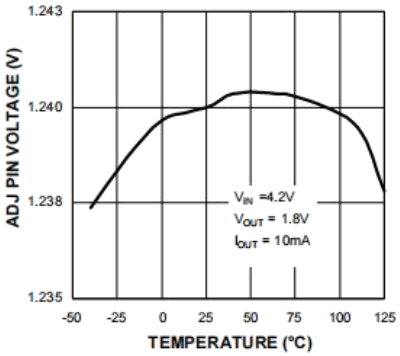


Adjust Pin Current vs. Temperature

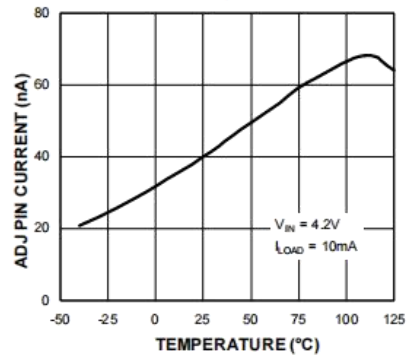



Line Regulation vs. Temperature

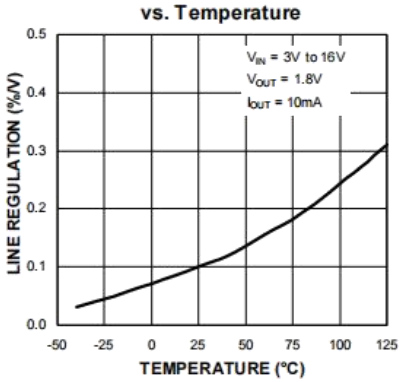



Typical Characteristics (Continued)

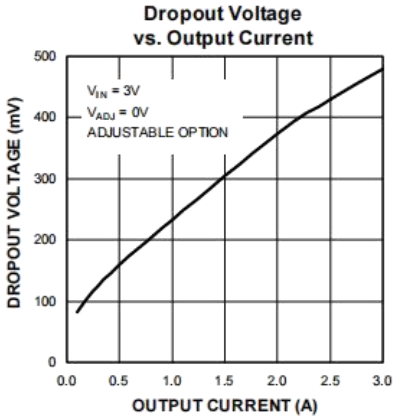


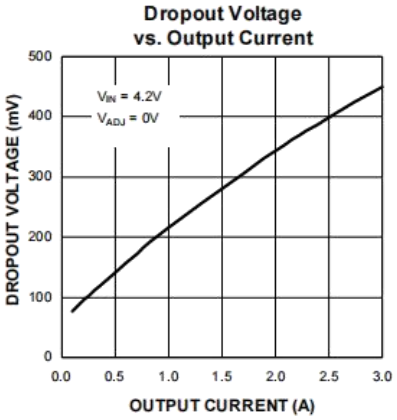


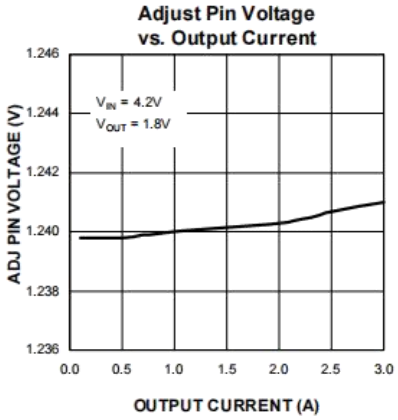


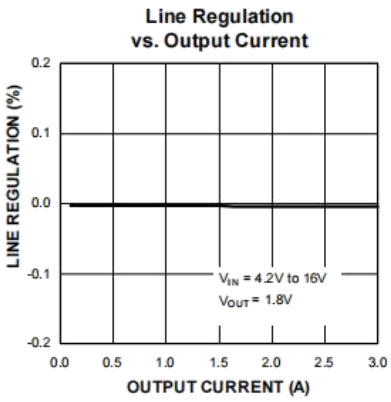


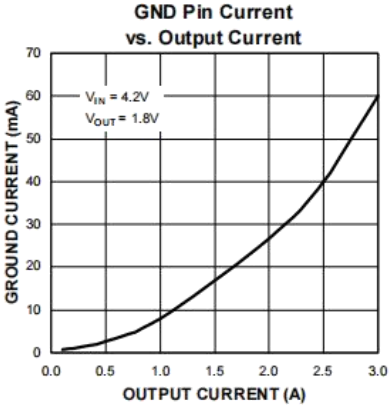

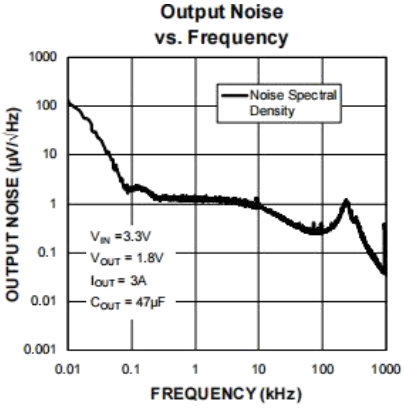

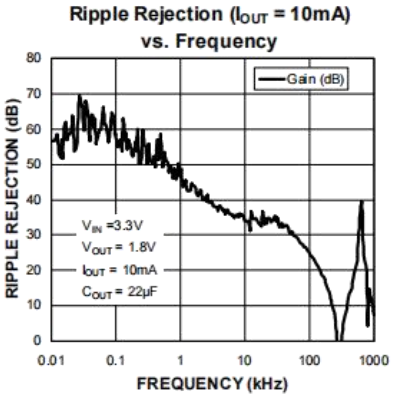

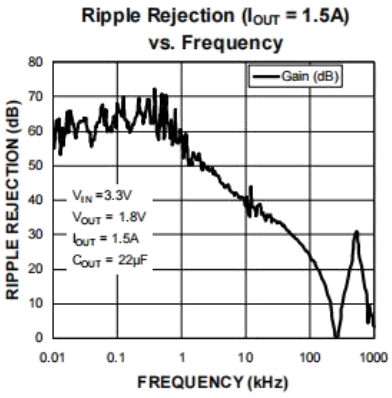

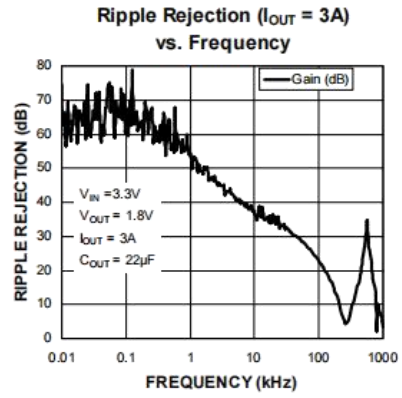

Functional Characteristics



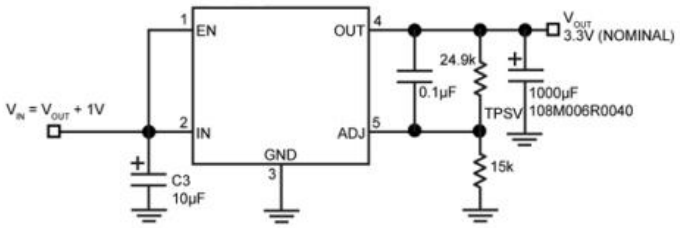


Figure 2. MIC29302 Load Transient Response Test Circuit


MIC29302 Line Transient Response with 3A Load,100µF Output Capacitance

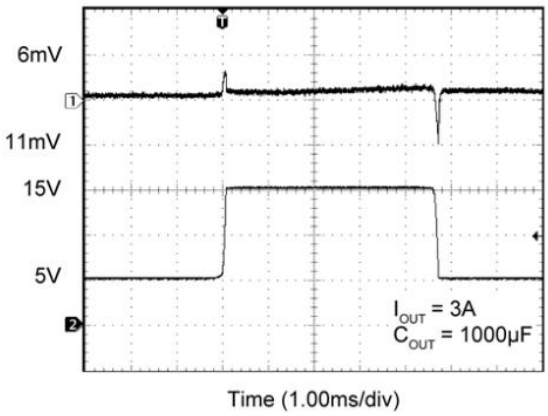


MIC29302 Load Transient Response

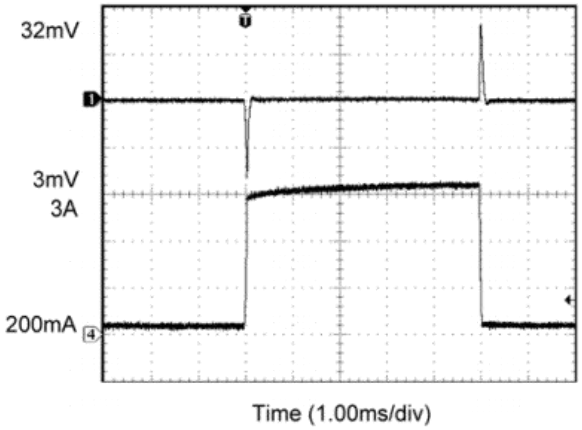

MIC29302 Line Transient Response with 3A Load,100µF Output Capacitance

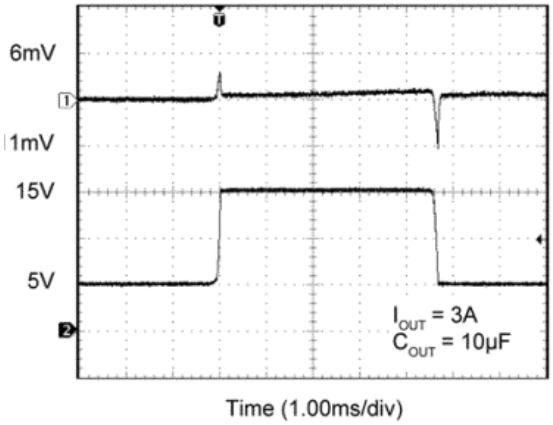

Functional Diagram

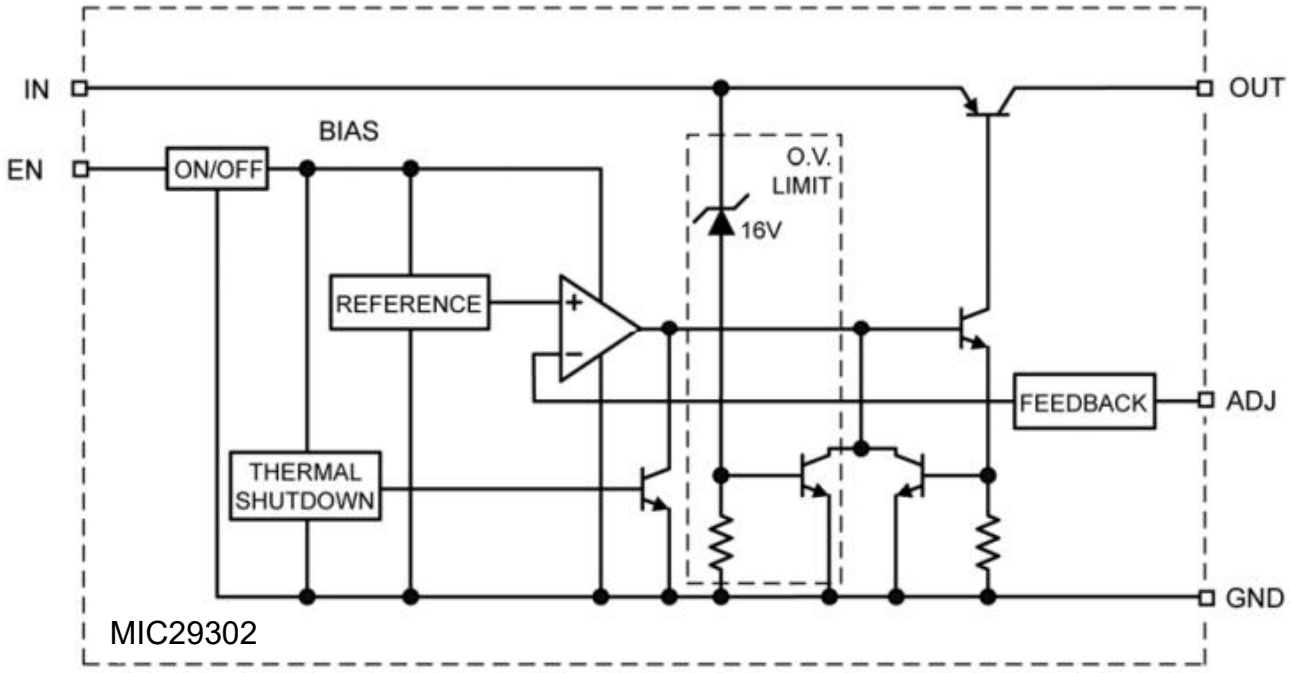

Application Information

The MIC29302 is a high-performance, low-dropout voltage regulator suitable for all moderate to high-current voltage regulation applications. Its 450mV typical dropout voltage at full load makes it especially valuable in battery-powered systems and as high efficiency noise filters in “post-regulator” applications. Unlike older NPNpass transistor designs, where the minimum dropout voltage is limited by the base-emitter voltage drop and collector-emitter saturation voltage, dropout performance of the PNP output is limited merely by the low VCE saturation voltage.

A trade-off for the low-dropout voltage is a varying base driver requirement. But Micrel’s Super ßeta PNP® process reduces this drive requirement to merely 1% of the load current.

The MIC29302 regulator is fully protected from damage due to fault conditions. Current limiting is linear; output current under overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the 125°C maximum safe operating temperature. The output structure of the regulators allows voltages in excess of the desired output voltage to be applied without reverse current flow. The MIC29302 offer a logic level ON/OFF control: when disabled, the devices draw nearly zero current.

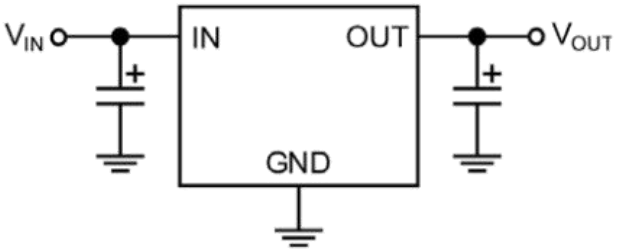


Figure 3. Linear Regulators Require Only Two Capacitors for Operation

Thermal Design

Linear regulators are simple to use. The most complicated set of design parameters to consider are thermal characteristics. Thermal design requires the following application-specific parameters:

- Maximum ambient temperature, T_A
- Output Current, I_{OUT}
- Output Voltage, V_{OUT}
- Input Voltage, V_{IN}

First, we calculate the power dissipation of the regulator from these numbers and the device parameters from this datasheet:

$$P_D=I_{OUT}(1.02V_{IN}-V_{OUT})$$

Where the ground current is approximated by 2% of IOUT.

Then the heat sink thermal resistance is determined with this formula:

$$\theta_{SA}=\frac{TJMAX-TA}{PD} - (\theta_{JC}+\theta_{CS})$$

where:

$T_{JMAX} \le 125°C$ and θ_{CS} is between 0 and 2°C/W.

The heat sink may be significantly reduced in applications where the minimum input voltage is known and is large compared to the dropout voltage. A series input resistor can be used to drop excessive voltage and distribute the heat between this resistor and the regulator. The low-dropout properties of Micrel Super βeta PNP® regulators allow very significant reductions in regulator power dissipation and the associated heat sink without compromising performance. When this technique is employed, a capacitor of at least 0.1μF is needed directly between the input and regulator ground.

With no heat sink in the application, calculate the junction temperature to determine the maximum power dissipation that will be allowed before exceeding the maximum junction temperature of the MIC29302. The maximum power allowed can be calculated using the thermal resistance (θ_{JA}) of the D-Pak (TO252) adhering to the following criteria for the PCB design: 2 oz. copper and 100mm2 copper area for the MIC29302.

For example, given an expected maximum ambient temperature (T_A) of 75°C with V_{IN} = 3.3V, V_{OUT} = 2.5V, and I_{OUT} = 1.5A, first calculate the expected P_D using:

$$P_D=(3.3V-2.5V)\times3A-(3.3V)\times（0.016A）=2.3472W$$

Next, calcualte the junction temperature for the expected power dissipation:

$$T_J=(\theta_{JA}\times P_D)+T_A=(35°C/W\times2.3472W)+75°C=157.15°C$$

Now determine the maximum power dissipation allowed that would not exceed the IC's maximum junction temperature (125°C) without the use of a heat sink by:

$$P_{D(MAX)}=(T_{J(MAX)}-T_A)/\theta_{JA}$$

$$=(1.25°C-75°C)/(35°C/W)$$

$$=1.428W$$

Capacitor Requirements

For stability and minimum output noise, a capacitor on the regulator output is necessary. The value of this capacitor is dependent upon the output current; lower currents allow smaller capacitors. The MIC29302 is stable with a 10μF capacitor at full load.

This capacitor need not be an expensive low-ESR type; aluminum electrolytics are adequate. In fact, extremely low-ESR capacitors may contribute to instability. Tantalum capacitors are recommended for systems where fast load transient response is important.

When the regulator is powered from a source with high AC impedance, a 0.1μF capacitor connected between input and GND is recommended.

Transient Response and 5V to 3.3V Conversion

The MIC29302 has excellent response to variations in input voltage and load current. By virtue of its low dropout voltage, the device does not saturate into dropout as readily as similar NPN-based designs. A 3.3V output Micrel LDO will maintain full speed and performance with an input supply as low as 4.2V, and will stillprovide some regulation with supplies down to 3.8V, unlike NPN devices that require 5.1V or more for good performance and become nothing more than a resistor under 4.6V of input. Micrel's PNP regulators provide superior performance in "5V to 3.3V" conversion applications than NPN regulators, especially when all tolerances are considered.

Minimum Load Current

The MIC29302 regulator operates within a specified load range. If the output current is too small, leakage currents dominate and the output voltage rises.

A minimum load current of 10mA is necessary for proper regulation and to swamp any expected leakage current across the operating temperature range.

For best performance the total resistance (R1+R2) should be small enough to pass the minimum regulator load current of 10mA.

Adjustable Regulator Design

The output voltage can be programmed anywhere between 1.25V and the 15V. Two resistors are used.

The resistor values are calculated by:

$$R1=R2\times(\frac{VOUT}{1.240}-1)$$

where VOUT is the desired output voltage.

Figure 4 shows component definition. Applications with widely varying load currents may scale the resistors to draw the minimum load current required for proper
operation (see “Minimum Load Current” section).

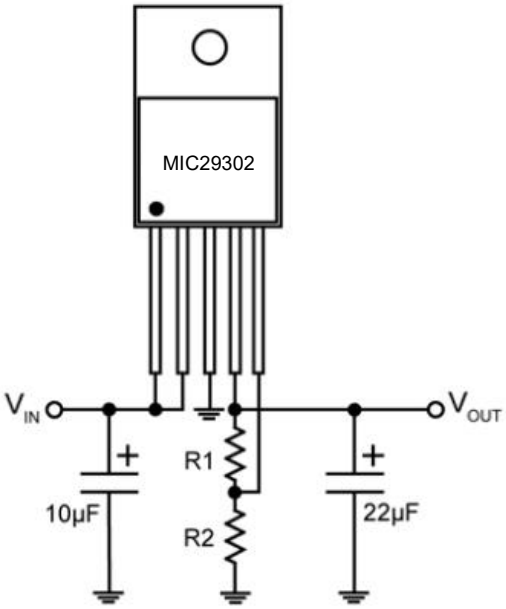



Figure 4. Adjustable Regulator with Resistors

Enable Input

MIC29302 features an enable (EN) input that allows ON/OFF control of the device. Special design allows “zero” current drain when the device is disabled—only microamperes of leakage current flows. The EN input has TTL/CMOS compatible thresholds for simple interfacing with logic, or may be directly tied to VIN.
Enabling the regulator requires approximately 20µA of current into the EN pin.


Physical Dimensions

TO-220-5

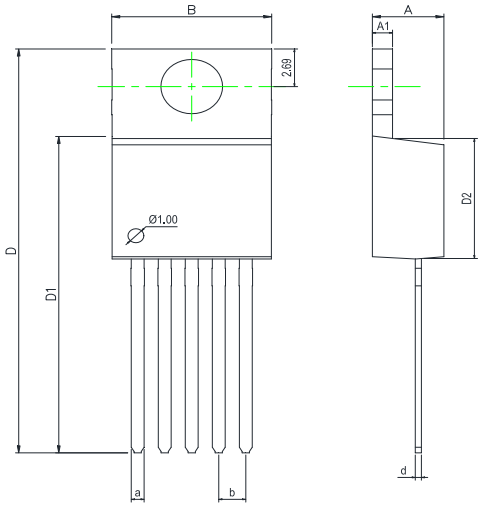

Dimensions In Millimeters(TO-220-5)									
Symbol:	A	A1	B	D	D1	D2	a	d	b
Min:	4.52	1.25	10	28.2	22.4	8.69	0.71	0.33	1.70BSC
Max:	4.62	1.29	10.3	28.9	22.6	8.79	0.97	0.42	


TO-263-5

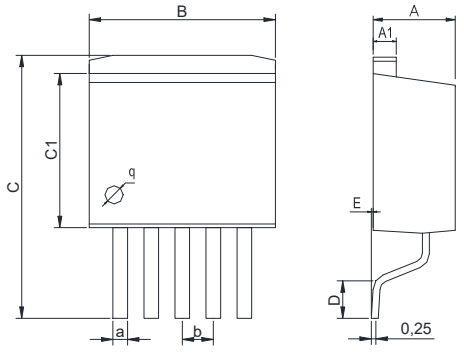

Dimensions In Millimeters(TO-263-5)									
Symbol:	A	A1	B	C	C1	D	E	a	b
Min:	4.45	1.22	10	13.7	8.40	1.90	0	0.71	1.70BSC
Max:	4.62	1.32	10.4	14.6	8.90	2.10	0.20	0.97	


Physical Dimensions

TO-263-5(A2)

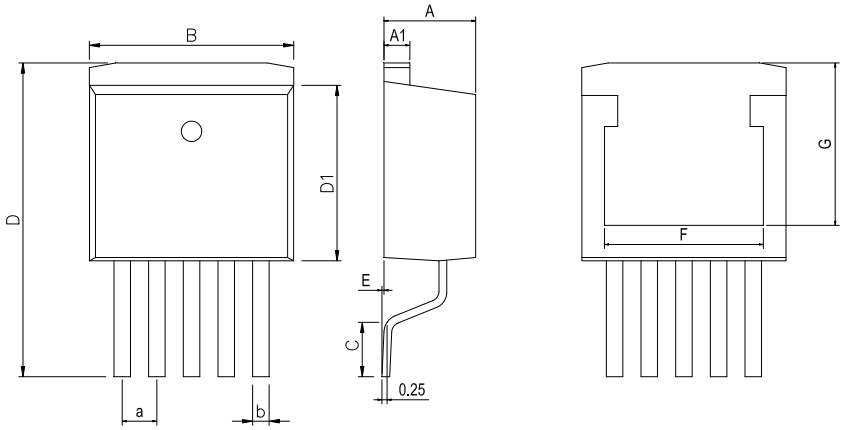

Dimensions In Millimeters(TO-263-5)											
Symbol:	A	A1	B	C	D	D1	E	F	G	a	b
Min:	4.40	1.22	9.8	2.10	14.7	8.50	0	7.70	7.87	0.71	1.70
Max:	4.60	1.32	10.4	2.60	15.6	9.10	0.305	7.90	8.07	0.97	BSC


TO-220-5(A2)

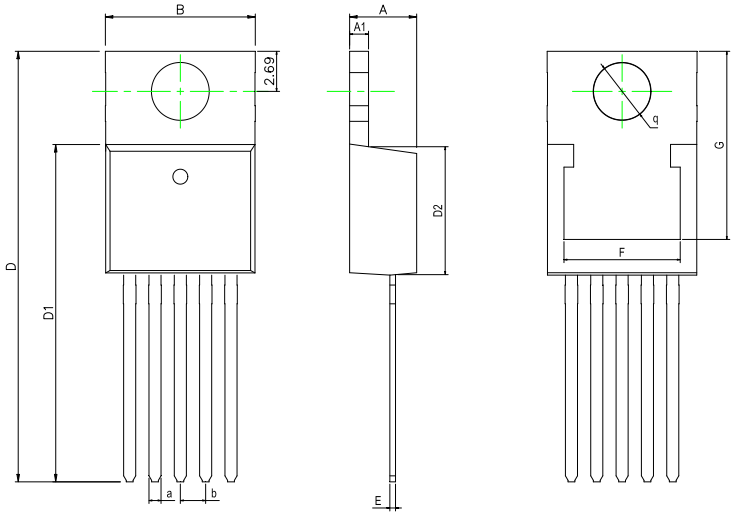

Dimensions In Millimeters(TO-220-5)												
Symbol:	A	A1	B	D	D1	D2	E	F	G	a	b	q
Min:	4.40	1.22	9.8	28.5	22.4	8.50	0.33	7.70	12.55	0.71	1.70	3.80
Max:	4.60	1.32	10.4	28.9	22.7	9.10	0.43	7.90	12.65	0.97	BSC	TYP

Physical Dimensions

TO-252-4

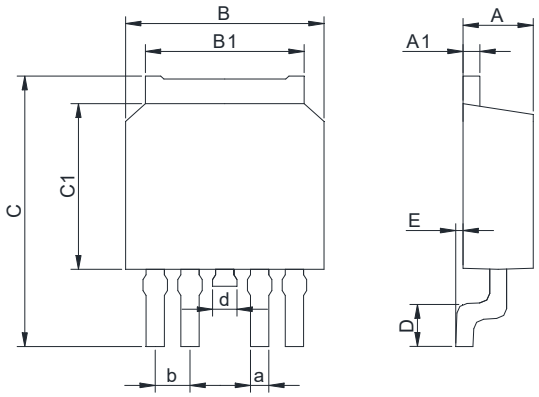

Dimensions In Millimeters(TO-252-4)											
Symbol:	A	A1	B	B1	C	C1	D	E	a	d	b
Min:	2.20	0.45	6.40	5.20	9.40	5.40	1.40	0	0.45	0.4	1.27BSC
Max:	2.40	0.55	6.80	5.50	10.2	5.80	1.77	0.15	0.60	0.6	

Revision History

DATE	REVISION	PAGE
2014-8-9	New	1-18
2023-7-26	Modify the packaging size diagramTO-220-5、TO-263-5（A2）、TO-220-5（A2）、Update encapsulation type、Update Lead Temperature、Update Pin Configuration	14-15、1、4、3

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: Select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety,security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Huaguan Semiconductor, and the user shall not claim any compensation liability against Huaguan Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.