



Specification for Approval

**SAMPLES
ATTACHED AREA**

- **DEVICE NUMBER: BPC-817**

| DATE | PAGE | | | | | | | CONTENTS | | | | |
|-----------|------|-----|-----|-----|-----|-----|--|----------|--|--|--|------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | | | | | | |
| 2015/7/29 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | | | | Initial Released |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

FOR CUSTOMER'S APPROVAL STAMP OR SIGNATURE

| APPROVED | PURCHASE | MANUFACTURE | QUALITY | ENGINEERING |
|----------|----------|-------------|---------|-------------|
| | | | | |

佰鴻工業股份有限公司
 BRIGHT LED ELECTRONICS CORP.
 新北市板橋區和平路 19 號 3 樓
 3F., No.19, He Ping Road,
 Ban Qiao Dist., New Taipei City,
 Taiwan
 Tel: +886-2-29591090
 Fax: +886-2-29547006/29558809
www.brtled.com

| ISSUED | APPROVED | PREPARED |
|--------|----------|----------|
| | | |

● Features:

1. Current transfer ratio (CTR: MIN. 50% at $I_F=5\text{mA}$, $V_{CE}=5\text{V}$)
2. High input-output isolation voltage ($V_{ISO}=5,000\text{Vrms}$)
3. Response time (t_r : TYP. $4\mu\text{s}$ at $V_{CE}=2\text{V}$, $I_C=2\text{mA}$, $R_L=100\ \Omega$)
4. VDE approved(NO.40007240)
5. UL/CUL approved(NO.E236324)
6. CQC approved(NO.CQC08001026994
NO.CQC05001014257)
7. This product doesn't contain restriction substance, comply RoHS standard


● Description

1. The BPC-817 series are optically coupled isolators containing a GaAs light emitting diode and an NPN silicon phototransistor
2. The lead pitch is 2.54mm

● Applications:

1. Computer terminals.
2. System appliances, measuring instruments.
3. Registers, copiers, automatic vending machines.
4. Electric home appliances, such as fan heaters, etc.
5. Signal transmission between circuits of different potentials and impedances.

● Outline Dimensions

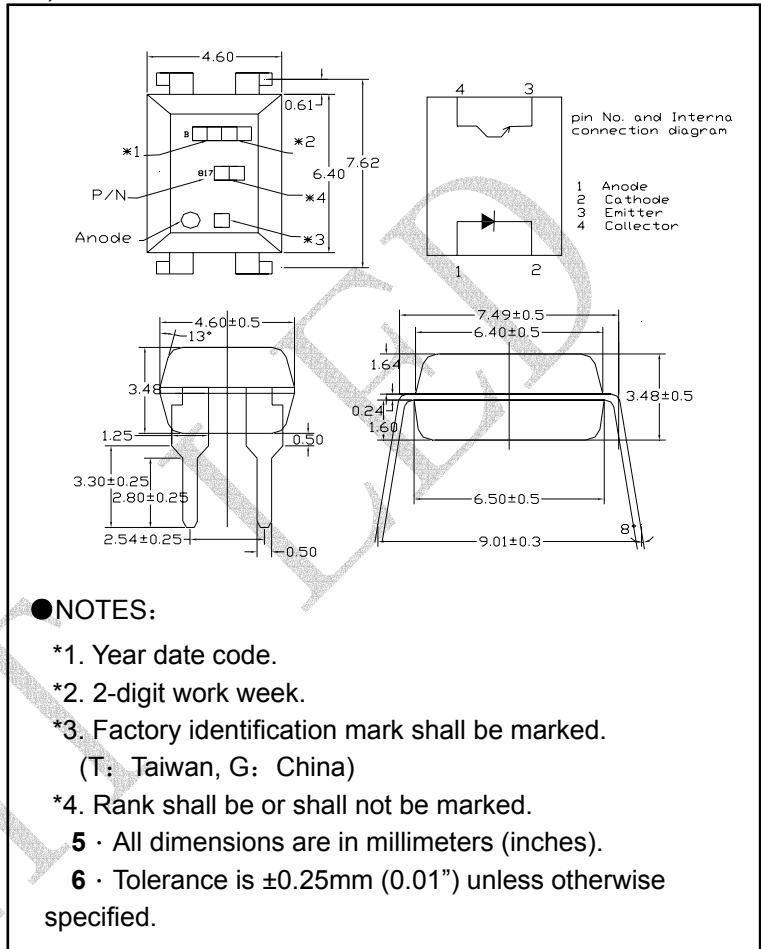

● Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

| Parameter | | Symbol | Rating | Unit |
|---|-----------------------------|------------|--------------|------|
| INPUT | Forward Current | I_F | 50 | mA |
| | Reverse Voltage | V_R | 6 | V |
| | Power Dissipation | P | 70 | mW |
| OUTPUT | Collector-Emitter Voltage | V_{CEO} | 35 | V |
| | Emitter- Collector Voltage | V_{ECO} | 6 | |
| | Collector Current | I_C | 50 | mA |
| | Collector Power Dissipation | P_C | 150 | mW |
| Total Power Dissipation | | P_{tot} | 200 | mW |
| *1 Isolation Voltage | | V_{iso} | 5,000 | Vrms |
| Rated impulse isolation voltage | | V_{IOTM} | 6,000 | V |
| Rated repetitive peak isolation voltage | | V_{IORM} | 630 | V |
| Operating Temperature | | T_{opr} | -30 to + 110 | °C |
| Storage Temperature | | T_{stg} | -55 to + 125 | |
| *2 Soldering Temperature | | T_{sol} | 260 | |

*1. AC For minute, R.H. =40~60%

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.

*2. For 10 Seconds



● Electro-Optical Characteristics (Ta=25°C)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|--------------------------------------|---------------|--|--------------------|--------------------|------|---------------|
| INPUT | Forward Voltage | V_F | $I_F=20\text{mA}$ | --- | 1.2 | 1.4 | V |
| | Reverse Current | I_R | $V_R=6\text{V}$ | --- | --- | 10 | μA |
| | Terminal Capacitance | C_t | $V=0, f=1\text{KHz}$ | --- | 30 | 250 | pF |
| OUTPUT | Collector Dark Current | I_{CEO} | $V_{CE}=20\text{V}, I_F=0$ | --- | --- | 100 | nA |
| | Collector-Emitter Breakdown Voltage | BV_{CEO} | $I_C=0.1\text{mA}$ $I_F=0$ | 35 | --- | --- | V |
| | Emitter-Collector Breakdown Voltage | BV_{ECO} | $I_E=10\mu\text{A}$ $I_F=0$ | 6 | --- | --- | V |
| TRANSFER CHARACTERISTICS | Collector Current | I_c | $I_F=5\text{mA}$ | 2.5 | --- | 30 | mA |
| | *1 Current Transfer Ratio | CTR | $V_{CE}=5\text{V}$ | 50 | --- | 600 | % |
| | Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_F=20\text{mA}$ $I_C=1\text{mA}$ | --- | 0.1 | 0.2 | V |
| | Isolation Resistance | R_{iso} | DC500V 40~60%R.H. | 5×10^{10} | 1×10^{11} | --- | Ω |
| | Floating Capacitance | C_f | $V=0, f=1\text{MHz}$ | --- | 0.6 | 1 | pF |
| | Cut-Off Frequency | f_c | $V_{CE}=5\text{V}, I_C=2\text{mA}$ $R_L=100\Omega, -3\text{dB}$ | --- | 80 | --- | kHz |
| | Response Time(Rise) | t_r | $V_{CE}=2\text{V}, I_C=2\text{mA}$ | --- | 4 | 18 | μs |
| | Response Time(Fall) | t_f | $R_L=100\Omega$ | --- | 3 | 18 | μs |

*1 $CTR = I_C / I_F \times 100\%$

● RANK TABLE OF CURRENT TRANSFER RATIO(CTR)

| RANK MARK. | Min. (%) | Max. (%) |
|-----------------------|----------|----------|
| L | 50 | 100 |
| A | 80 | 160 |
| B | 130 | 260 |
| C | 200 | 400 |
| D | 300 | 600 |
| L or A or B or C or D | 50 | 600 |

Notes:

*1. Conditions: $I_F=5\text{mA}, V_{CE}=5\text{V}, T_a=25^\circ\text{C}$.

● CHARACTERISTICS CURVES

Fig.1 Forward Current vs. Ambient Temperature

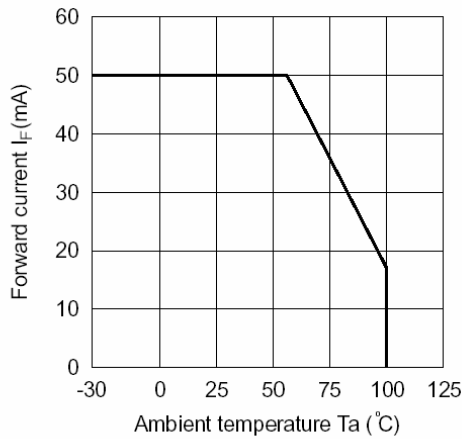


Fig.2 Collector Power Dissipation vs. Ambient Temperature

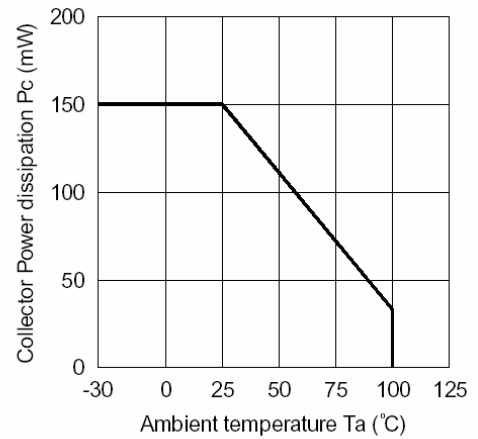


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

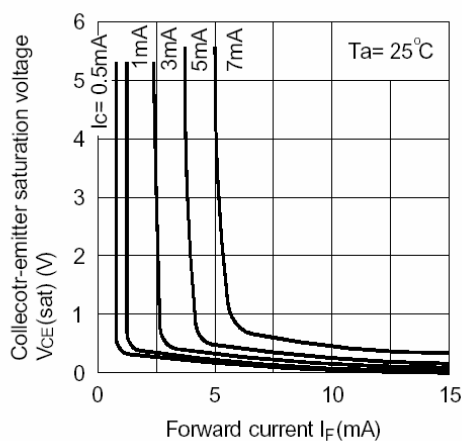


Fig.4 Forward Current vs. Forward Voltage

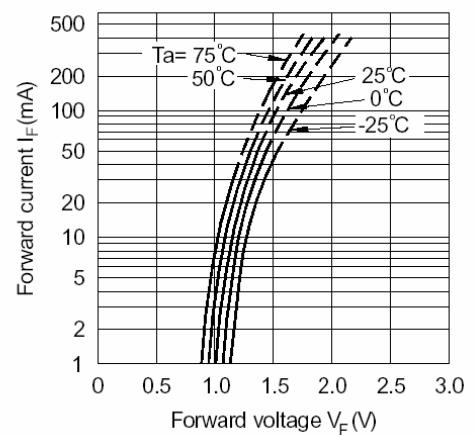


Fig.5 Current Transfer Ratio vs. Forward Current


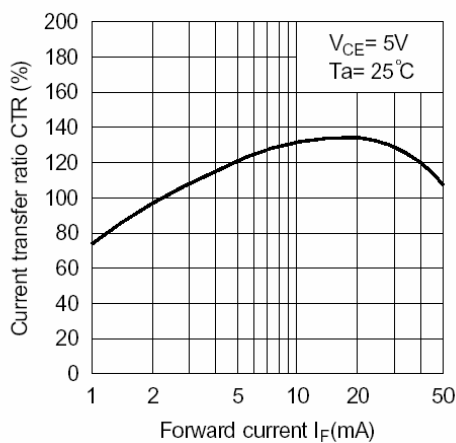


Fig.6 Collector Current vs. Collector-emitter Voltage

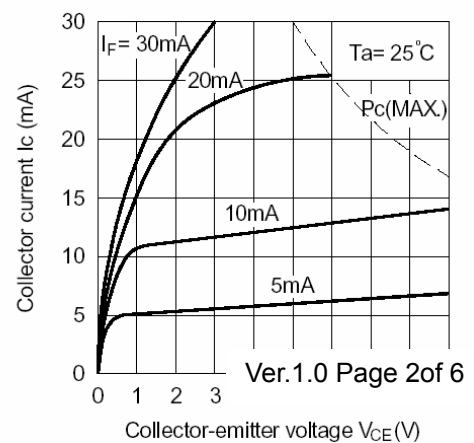

● Characteristics Curves

Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

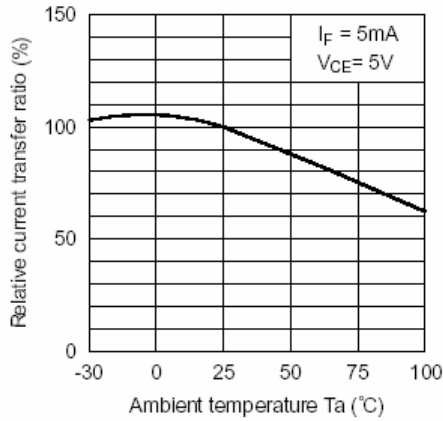


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

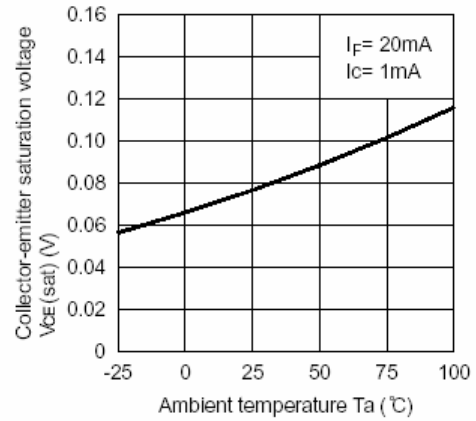


Fig.9 Collector Dark Current vs. Ambient Temperature

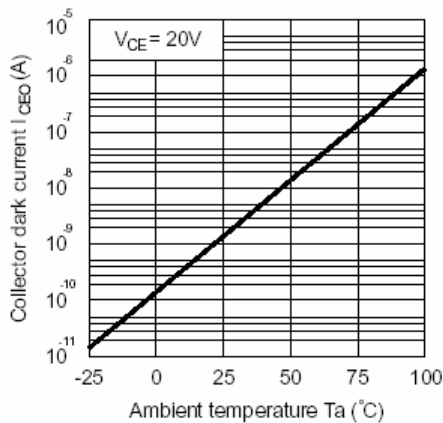


Fig.10 Response Time vs. Load Resistance



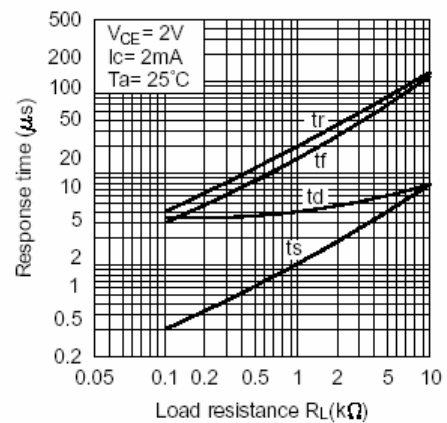



Fig.11 Frequency Response

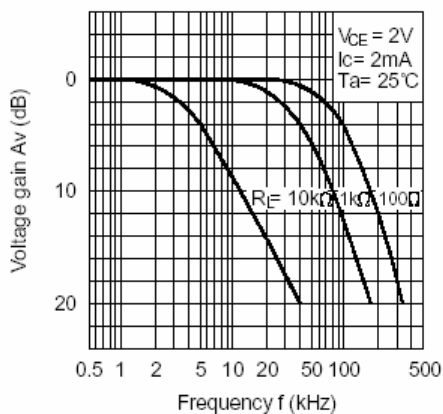

Test Circuit for Response Time

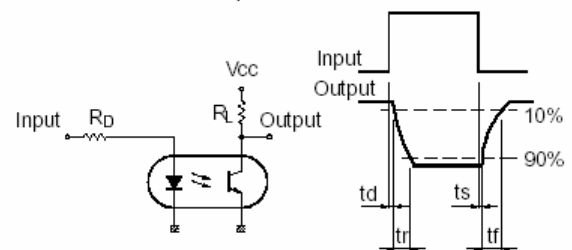

Test Circuit for Frequency Response

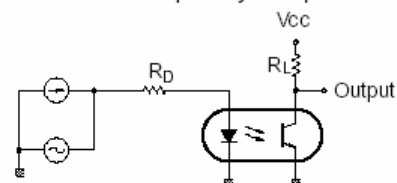




● Reliability Test

| Classification | Test Item | Reference Standard | Test Conditions | Result |
|--------------------|---|---|--|--------|
| Endurance Test | Operation Life | MIL-STD-750:1026 MIL-STD-883:1005 JIS C 7021 :B-1 | Connect with a power $I_f=50\text{mA}$ T_a =Under room temperature Test time=1,000hrs | 0/20 |
| | High Temperature High Humidity Reverse Bias (H3TRB) | JIS C 7021 :B-11 | $T_a=+85^\circ\text{C}\pm 5^\circ\text{C}$, RH=85% PTR= V_{CE} absolute max rating*80% Test time=1000hrs | 0/20 |
| | High Temperature Reverse Bias (HTRB) | JIS C 7021 :B- 8 | $T_a=+105^\circ\text{C}\pm 5^\circ\text{C}$ PTR= V_{CE} absolute max rating Test time=1000hrs | 0/20 |
| | High Temperature Storage | MIL-STD-883:1008 JIS C 7021 :B-10 | High $T_a=+125^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| | Low Temperature Storage | JIS-C-7021 :B-12 | Low $T_a=-55^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| | Autoclave | JESD 22-A102-B | P=15PSIG, $T_a=121^\circ\text{C}$ Humi. =100%RH, 48hrs | 0/20 |
| Environmental Test | Temperature Cycling | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS C 7021 :A-4 | $125^\circ\text{C} \sim 25^\circ\text{C} \sim -55^\circ\text{C} \sim 25^\circ\text{C}$ 30min 5min 30min 5min Test Time=20cycle | 0/20 |
| | Thermal Shock | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011 | $125^\circ\text{C} \sim -55^\circ\text{C}$ 20min 20min Test Time=20cycle | 0/20 |
| | Solder Resistance | MIL-STD-202:201A MIL-STD-750:2031 JIS C 7021 :A-1 | Operation heating : 260°C , within 10 ± 1 seconds. | 0/20 |
| | Solder Ability | MIL-S-883:2003 JIS C 7021 :A-2 | Operation heating : 235°C , within 5 ± 1 seconds. | 0/20 |


● Judgment Criteria Of Failure For The Reliability

| Symbol | Measuring conditions | Judgment criteria for failure |
|-------------------------|---------------------------------------|-------------------------------|
| V_F (V) | $I_f=20\text{mA}$ | Over $U_x1.0$ |
| I_r (μA) | $V_r=6\text{V}$ | Over $U_x1.0$ |
| CTR(%) | $I_f=5\text{mA}$, $V_{CE}=5\text{V}$ | Shift>1.2 |
| $V_{CE(sat)}$ | $I_f=20\text{mA}$, $I_c= 1\text{mA}$ | Over $U_x1.0$ |
| BV_{CEO} | $I_c=0.1\text{mA}$, $I_f=0$ | Over $L_x1.0$ |
| BV_{ECO} | $I_E=10\mu\text{A}$, $I_f=0$ | Over $L_x1.0$ |

● Packaging Box Dimensions (Units: mm)

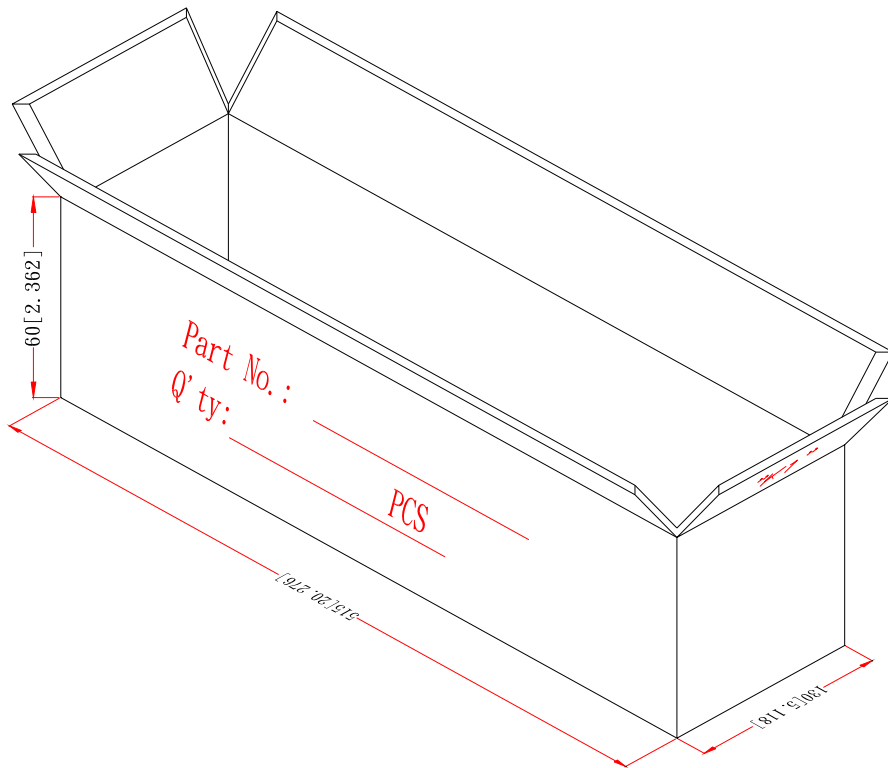

● Packaging Tube Dimensions



Notes:

- 1、100pcs per tube, 5Kpcs per box.
- 2、All dimensions are in millimeters (inches).
- 3、Specifications are subject to change without notice.