


Features

- Epitaxial Planar Die Construction
- Complementary NPN Type Available (MMBT5551)
- Ideal for Low Power Amplification and Switching
- Marking Code:2L

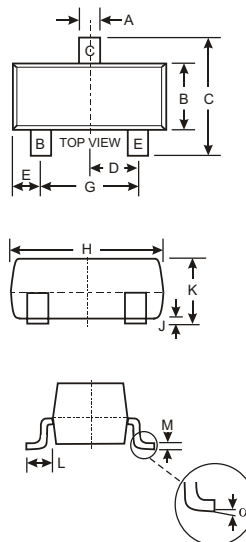

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V_{CEO}	-150	V
Collector-Base Voltage	V_{CBO}	-160	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-600	mAdc

• THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board,(1) $T_A = 25^\circ\text{C}$ Derate above 25°C	PD	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance,Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate,(2) $T_A = 25^\circ\text{C}$ Derate above 25°C	PD	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance,Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	T_j, T_{stg}	-55 to +150	$^\circ\text{C}$

1. FR-5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

OFF CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Collector-Emitter Breakdown Voltage ($I_C = -1.0\text{mA}, I_B = 0$)	$V_{(BR)CEO}$	-150	-	-	V
Collector-Base Breakdown voltage ($I_C = -100\mu\text{A}, I_E = 0$)	$V_{(BR)CBO}$	-160 -	- -	- -	V
Emitter-Base Breakdown Voltage ($I_E = -10\mu\text{A}, I_C = 0$)	$V_{(BR)EBO}$	-5	-	-	V
Collector Cutoff Current ($V_{CB} = -120\text{V}, I_E = 0$) ($V_{CB} = -120\text{V}, I_E = 0, T_A = 100^\circ\text{C}$)	I_{CBO}	- -	- -	-50 -50	nA μA

ON CHARACTERISTICS

DC Current Gain ($I_C = -1.0\text{mA}, V_{CE} = -5.0\text{V}$) ($I_C = -10\text{mA}, V_{CE} = -5.0\text{V}$) ($I_C = -50\text{mA}, V_{CE} = -5.0\text{V}$)	h_{FE}	50 80 50	- - -	- 250 -	
Collector-Emitter Saturation Voltage ($I_C = -10\text{mA}, I_B = -1.0\text{mA}$) ($I_C = -50\text{mA}, I_B = -5.0\text{mA}$)	$V_{CE(S)}$	- -	- -	-0.2 -0.5	V
Base-Emitter Saturation Voltage ($I_C = -10\text{mA}, I_B = -1.0\text{mA}$) ($I_C = -50\text{mA}, I_B = -5.0\text{mA}$)	$V_{BE(S)}$	- -	- -	-1 -1	V

SMALL-SIGNAL CHARACTERISTICS

Current-Gain — Bandwidth Product ($I_C = -10\text{mA}, V_{CE} = -10\text{V}, f = 100\text{MHz}$)	f_T	100	-	300	MHz
Output Capacitance ($V_{CB} = -10\text{V}, I_E = 0, f = 1.0\text{MHz}$)	C_{obo}	-	-	6	PF
Small-Signal Current Gain ($I_C = -1.0\text{mA}, V_{CE} = -10\text{V}, f = 1.0\text{kHz}$)	h_{fe}	40	-	200	
Noise Figure ($I_C = -200\mu\text{A}, V_{CE} = -5.0\text{V}, R_s = 10\Omega, f = 1.0\text{kHz}$)	NF	-	-	8	dB

TYPICAL TRANSIENT CHARACTERISTICS

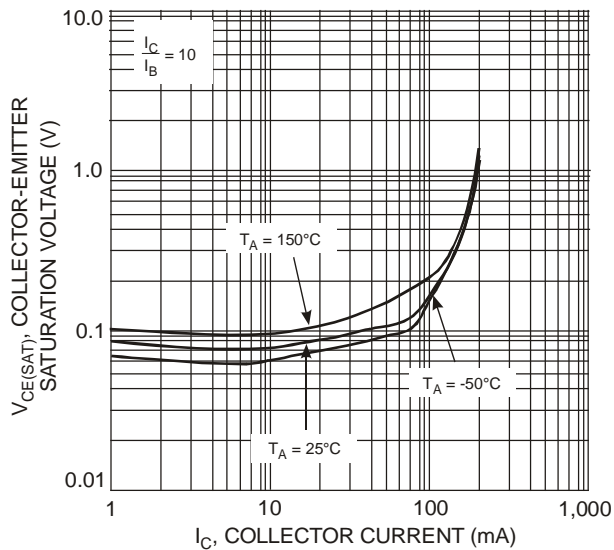


Fig. 1 Typical Collector-Emitter Saturation Voltage vs. Collector Current

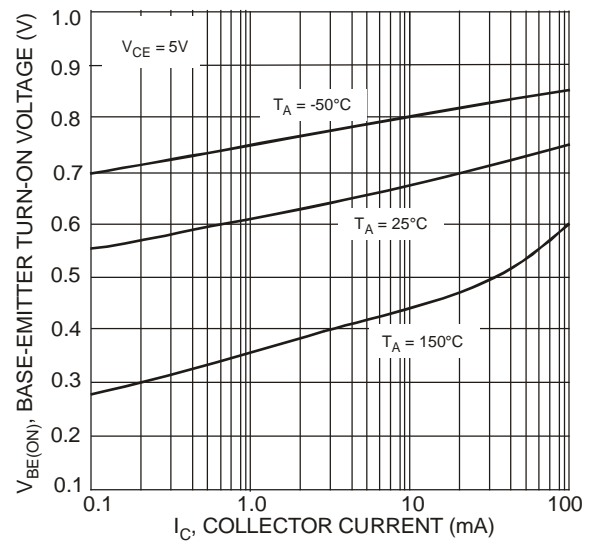


Fig. 2 Typical Base-Emitter Turn-On Voltage vs. Collector Current

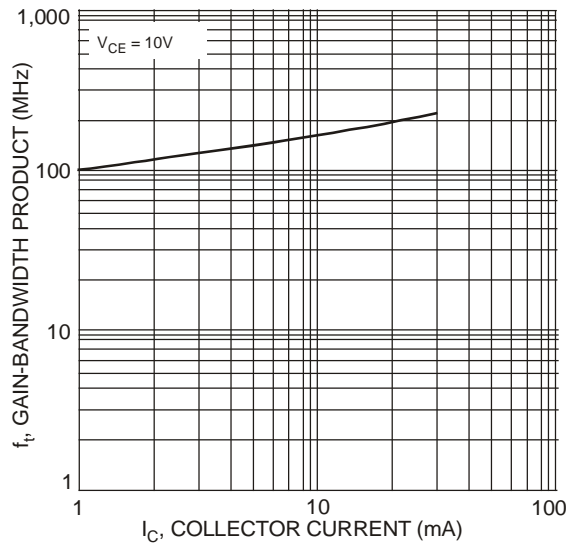


Fig. 3 Typical Gain-Bandwidth Product vs. Collector Current

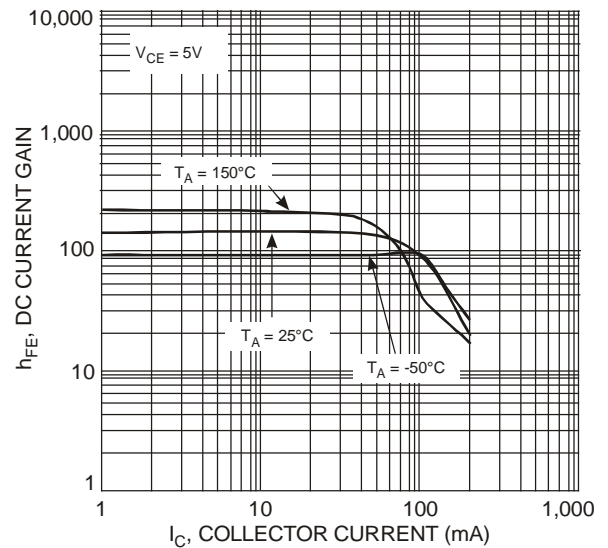


Fig. 4 Typical DC Current Gain vs. Collector Current

IMPORTANT NOTICE

HC-SEMI reserves the right to make changes without further notice to any products herein.

HC-SEMI makes no warranty, representation or guarantee regarding

The suitability of its products for any particular purpose, nor does HC-SEMI assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages.

“Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts.

HC-SEMI products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the HC-SEMI product could create a situation where personal injury or death may occur.

Should Buyer purchase or use HC-SEMI products for any such unintended or unauthorized application, Buyer shall indemnify and hold HC-SEMI and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that HC-SEMI was negligent regarding the design or manufacture of the part.