



HT series

Photocoupler Product Data Sheet


HT-354X

Spec No:HT-PC-354X-P-007-A1 Effective Date:07/03/2024



■ Package





■ Description

The HT-354X is a photoelectric coupler composed of two light-emitting diode and phototransistor. It is packaged in a 4-pin package.

■ Features

- Current transfer ratio(CTR : MIN. 20% at IF = ±1mA, VCE = 5V)
- High input-output isolation voltage(Viso = 3,750Vrms)
- Operating Temperature: -55[°]C~110[°]C
- Safety approval (UL 1577, VDE DIN EN60747-5-5 (VDE 0884-5), CQC11-471543-2022)
- RoHS
- MSL1

Applications

- Programmable controllers
- Switching power supply, intelligent meter
- Home appliances: such as air conditioners, fans, water heaters, etc



■ Product Nomenclature

The product name is designated as below:

HT -354 X -X X- X X X- XX

1 2 3 4 5 6 7

Designation:

HT =Hengtuo Technology Co.,LTD.

354= Product Series

- ① = Lead form option(NONE)₍₁₎
- $2 = CTR Rank(A,B,C,D,E)_{(2)}$
- 3 = Tape and Reel option(TP,TP1)₍₃₎
- 4 = Lead frame Material(F,NONE)₍₄₎
- ⑤ = VDE order option(fixed code "V")
- ⑥ = Halogen free option(fixed code"G")
- 7 = Customer code

Notes

1. Lead form option:

Symbol	Description
NONE	SOP4

2. CTR Rank:

Symbol	Description
A,B,C,D,E	CTR Rank
NONE	No Rank

3. Tape and Reel option:


Syml	bol	Description
TP&T	Ъ1	Tape and Reel Type

4. Lead frame Material

Symbol	Description
NONE	Copper



■ Marking Information

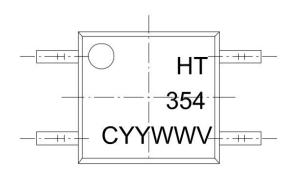

Designation:

HT denotes Hengtuo
354 denotes Device
C denotes CTR Rank
YY denotes year code
WW denotes week code
V denotes VDE

■ Maximum Ratings

	Parameter	Symbol	Values	Unit
	Forward Current	l _F	±50	mA
	Reverse Voltage	V_{R}	6	V
Input	Power Dissipation		70	mW
	Derating factor (above Ta = 90°C)	P _D	2.9	mW/°C
	Collector - Emitter Voltage	V_{CEO}	80	V
	Emitter - Collector Voltage	V _{ECO}	7	V
Output	Collector Current	Ic	50	mA
Output	Collector Power Dissipation	Pc	150	mW
	Derating factor (above Ta = 70°C)		3.7	mW/°C
Operating	temperature range	T _{op}	− 55 ~ 110	°C
Storage temperature range		T _{stg}	− 55 ~ 125	°C
Total Power consumption		P(W)	200	mW
Isolation Voltage ⁽¹⁾		V _{ISO}	3750	Vrms
Soldering	Temperature ⁽²⁾	T _{SOL}	260	°C

Notes:

- (1). AC for 1 minute, R.H.= $40 \sim 60\%$ R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.
- (2).For 10 seconds

■ Electronic Optical Characteristics



ı	Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditon
	Forward Voltage	V _F	-	1.2	1.4	V	I _F =±20mA
Input	Reverse Current	I _R	-	-	10	μA	V _R =4V
	Terminal Capacitance	Ct	-	30	250	рF	V=0, f=1KHz
	Collector Dark Current	I _{CEO}	-	-	100	nA	VCE=20V, IF=0
Output	Collector-Emitter Breakdown Voltage	BV _{CEO}	80			V	IC=0.1mA, IF=0
	Emitter-Collector Breakdown Voltage	BV _{ECO}	7			V	IE=10μA, IF=0
Collector Voltage	r-Emitter Saturation	V _{CE(sat)}		0.1	0.2	V	IF=±20mA, IC=1mA
Isolation	Resistance	R _{iso}	5×10 ¹⁰	1×10 ¹¹	-	Ω	DC500V, 40 ~ 60% R.H.
Floating	Capacitance	Cf		0.6	1	pF	V=0, f=1MHz
Cut-off Frequency		fc		80		kHz	VCE=5V, IC=2mA RL=100Ω,-3d B
Response Time (Rise)		tr		4	18	μs	VCE=2V, - IC=2mA
Respons	se Time (Fall)	tf	-	3	18	μs	$RL=100\Omega$,

■ Rank Table Of Current Transfer Ratio (CTR=IC/IF x 100%)

Rank Code	Symbol	Min	Max	Conditon
NONE		20	300	IF=±1mA,
А	CTR	50	150	VCE=5V,
В		100	300	Ta=25°C

■ Characteristics Curves



Fig.1 Relative Current Transfer Ratio vs. Forward Current

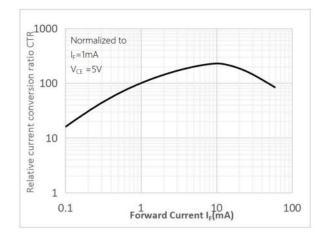


Fig.2 Forward Current vs. Forward Voltage

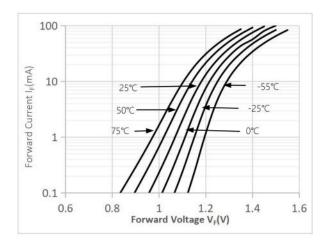


Fig.3 Collector Current vs. Collector-emitter Voltage Temperature

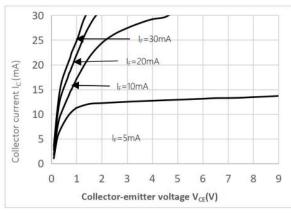


Fig.4 Relative Current Transfer Ratio vs.Ambient

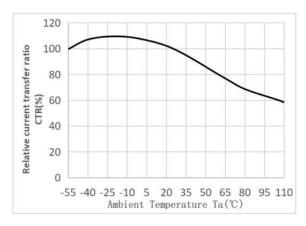


Fig.5 Collector-emitter Saturation Voltage vs. Ambient


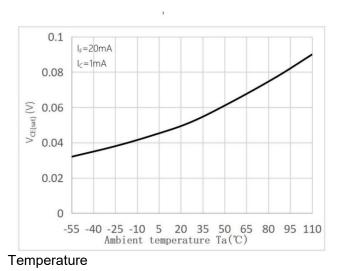


Fig.6 Collector Dark Current vs Ambient

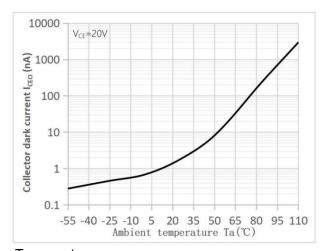


Temperature

Fig.7 Response Time vs. Load Resistance

Fig.8 Frequency Response



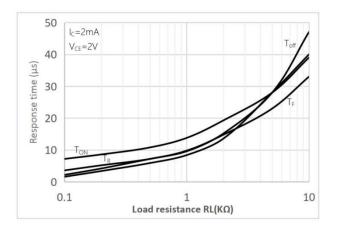



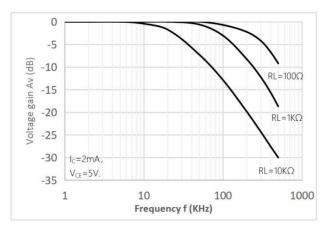


Fig.9 Collector-emitter Saturation Voltage vs Forward Current Waveforms


Fig.10 Switching Time Test Circuit &

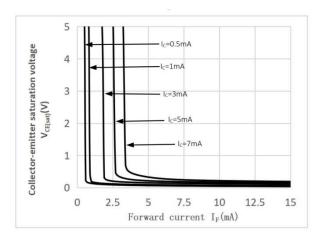


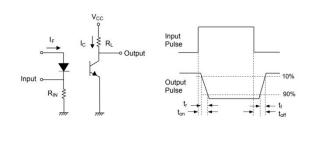


■ Outline Dimension










Unit: mm

Tolerance: ±0.1mm

■ Recommended solder pad Design

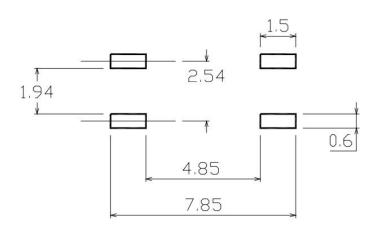

Unit: mm


Tolerance: ±0.1mm

■ Temperature Profile Of Soldering



1. IR Reflow soldering (JEDEC-STD-020D compliant)

Profile item	Conditon
Preheat -Temperature Min (TSmin) -Temperature Max (TSmax) -Time (min to max) (ts)	150°C 200°C 90±30 sec
Soldering zone -Temperature (TL) -Time (t∟) Peak Temperature (TP) -Time (TP-5°Cto TP) (ts)	217°C 60-150 sec 260°C 30 sec
Ramp-up rate	3°C / sec max
Ramp-down rate	3~6°C/ sec

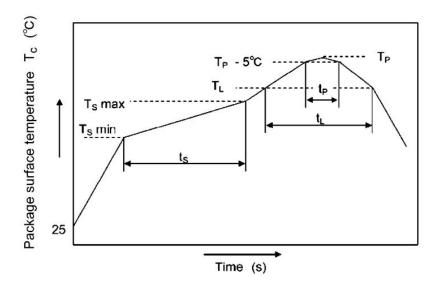

Notes:

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

2. Wave soldering (JEDEC22A111 compliant)




One time soldering is recommended within the condition.

Temperature:260+0/-5°C.

Time:10 sec.

Preheat temperature:25 to 140°C.

Preheat time:30 to 80 sec.

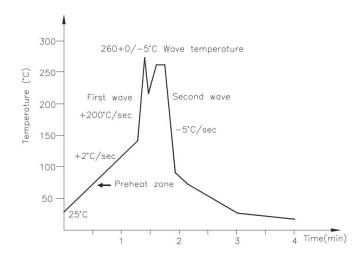

3. Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature: 380+0/-5°C

Time: 3 sec max.

■ Packing


Tape and Reel


Option TP:

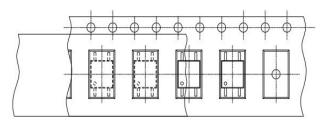





Option TP1:

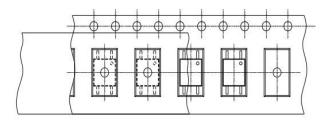





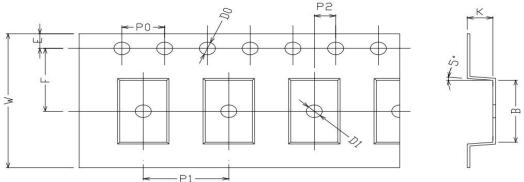



Deminsion/mm	W	E	F	P0	P1	P2
Packagetype:S	16±0.2	1.75±0.1	7.5±0.1	4±0.1	8±0.1	2±0.1

Deminsion/mm	Α	В	D0	D1	K
Packagetype:S	4.4±0.1	7.5±0.1	1.5±0.1	1.5±0.1	2.4±0.1

Packagetype:S	Reel	Inner carton	Outer carton
QTY/PCS	3K/reel	6K(2 reels)	60K



■ Attention:

- Hengtuo is continually improving the quality, reliability, function or design and Hengtuo reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.