


LM741 Operational Amplifier

General Description


The LM741 series are general purpose operational amplifiers which feature improved performance over industry standards like the LM709. They are a direct, plug-in replacement for the 709C, LM201, MC1439 and 748 in most applications. The amplifiers offer many features which make their application nearly foolproof: overload protection on the input and output, no latch-up when the common mode range is exceeded, as well as freedom from oscillations.

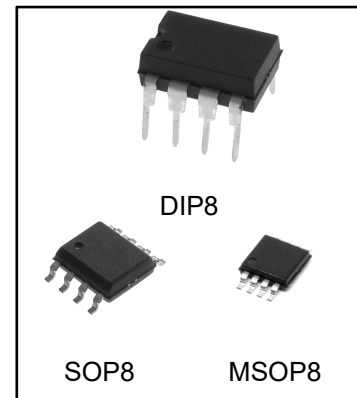


Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
LM741CN	DIP8	LM741	TUBE	2000pcs/Box
LM741ACN	DIP8	LM741A	TUBE	2000pcs/Box
LM741CM/TR	SOP8	LM741	REEL	2500pcs/Reel
LM741ACM/TR	SOP8	LM741A	REEL	2500pcs/Reel
LM741CMM/TR	MSOP8	LM741	REEL	3000pcs/Reel
LM741ACMM/TR	MSOP8	741A	REEL	3000pcs/Reel


Connection Diagram

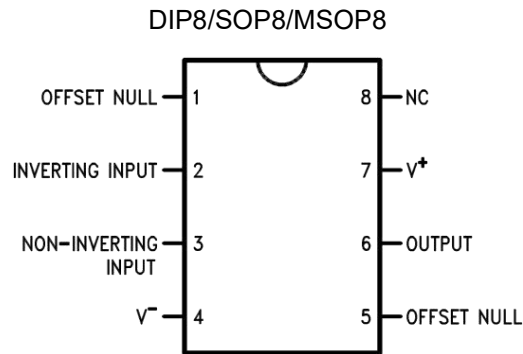

Schematic Diagram

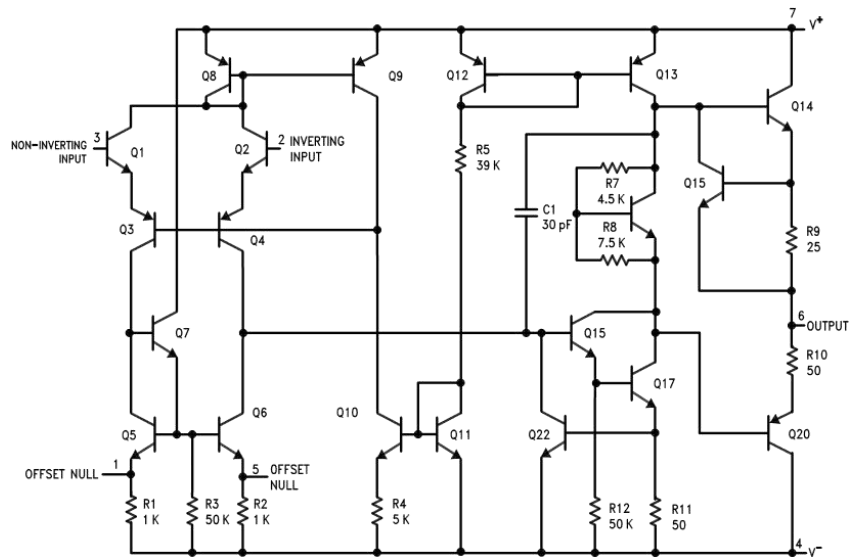

Offset Nulling Circuit

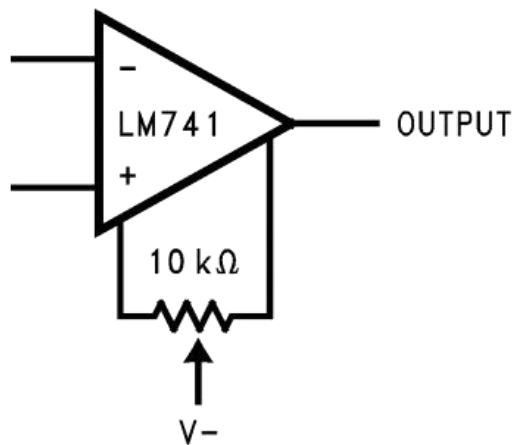

Absolute Maximum Ratings

CONDITION		LIMITS
Supply Voltage		±22V
Power Dissipation(Note2)		500mW
Differential Input Voltage		±30V
Input Voltage(Note3)		±15V
Output Sort Circuit Duration		Continuous
Operating Temperature Range		0°C to +70°C
Junction Temperature	LM741A	150°C
	LM741	100°C
Soldering Information	N-Package(10 seconds)	260°C
	J-or H-Package(10 seconds)	300°C
M-Package	Vapor Phase(60 seconds)	215°C
	Infrared(15 seconds)	215°C
Storage Temperature Range		-65°C to +150°C
ESD Tolerance(Note7)		400V

Electrical Characteristics

Parameter	Conditions	LM741A			LM741			Units
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	TA=25°C Rs≤10KΩ Rs≤50Ω		0.8	3.0		2.0	6.0	mW mW
	TAMIN≤TA≤TAMAX Rs≤50Ω Rs≤10KΩ			4.0			7.5	mW mW
	Average Input Offset Voltage Drift			15				μV/°C
Input Offset Voltage Adjustment Range	TA=25°C, VS=±20V	±10				±15		mW
Input Offset Current	TA=25°C		3.0	30		20	200	nA
	TAMIN≤TA≤TAMAX			70			300	nA
Average Input Offset Current Drift				0.5				nA/°C
Input Bias Current	TA=25°C		30	80		80	500	nA
	TAMIN≤TA≤TAMAX			0.210			0.8	μA
Input Resistance	TA=25°C, VS=±20V	1.0	6.0		0.3	2.0		MΩ
	TAMIN≤TA≤TAMAX, VS=±20V	0.5						MΩ
Input Voltage Range	TA=25°C				±12	±13		V
	TAMIN≤TA≤TAMAX							V

Large Signal Voltage Gain	TA=25°C, RL≥2KΩ Vs=±20V, Vo=±15V Vs=±15V, Vo=±10V	50				20	200		V/mW V/mW
	TAMIN≤TA≤TAMAX RL≥2KΩ Vs=±20V, Vo=±15V Vs=±15V, Vo=±10V Vs=±5V, Vo=±2V	32				15			V/mW V/mW V/mW
		10							
Output Voltage Swing	Vs=±20V RL≥10KΩ RL≥2KΩ	±16 ±15							V V
	Vs=±15V RL≥10KΩ RL≥2KΩ					±12 ±10	±14 ±13		V V
Output Short Circuit Current	TA=25°C	10	25	35			25		mA
	TAMIN≤TA≤TAMAX	10		40					mA
Common-Mode Rejection Ratio	TAMIN≤TA≤TAMAX Rs≤10KΩ, VCM=±12V			0.5		70	90		dB
	Rs≤50Ω, VCM=±12V	80	95						dB
Supply Voltage Rejection Ratio	TAMIN≤TA≤TAMAX Vs=±20V to Vs=±5V Rs≤50Ω	86	96						dB
	Rs≤10KΩ					77	96		dB
Transient Response Rise Time Overshoot	TA=25°C, Unity Gain		0.25	0.8			0.3		μs
			6.0	20			5		
Bandwidth(Note5)	TA=25°C	0.437	1.5						MHz
Slew Rate	TA=25°C, Unity Gain	0.3	0.7				0.5		V/μs
Supply Current	TA=25°C						1.7	2.8	mA
Power Consumption	TA=25°C Vs=±20V		80	150					mw
	Vs=±15V						50	85	mw

Note 1: “Absolute Maximum Ratings” indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.

Note 2: For operation at elevated temperatures, these devices must be derated based on thermal resistance, and Tj max. (listed under “Absolute Maximum Ratings”). $T_j = T_A + (\theta_{JA} P_D)$.

Thermal Resistance	DIP(B)	SOP-8(M)
θ_{JA} (Junction to Ambient)	100°C/W	195°C/W
θ_{JC} (Junction to Case)	N/A	N/A


Note 3: For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

Note 4: Calculated value from: BW (MHz) = 0.35/Rise Time(μs).

Note 5: Human body model, 1.5 kΩ in series with 100 pF.

Physical Dimensions


DIP8

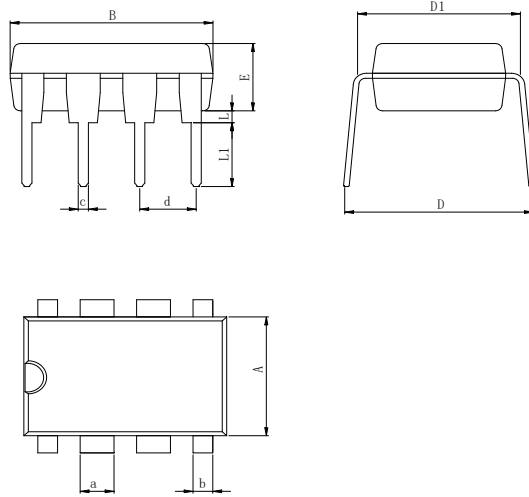

Dimensions In Millimeters(DIP8)

Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	9.00	8.40	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	9.50	9.00	7.82	3.55	0.70	3.60	1.55	0.90	0.50	


SOP8

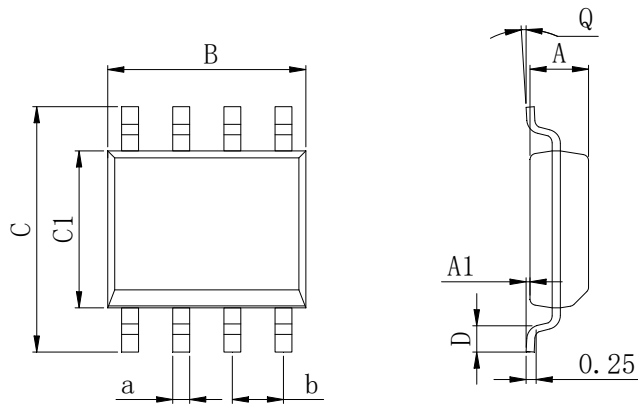

Dimensions In Millimeters(SOP8)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

MSOP8

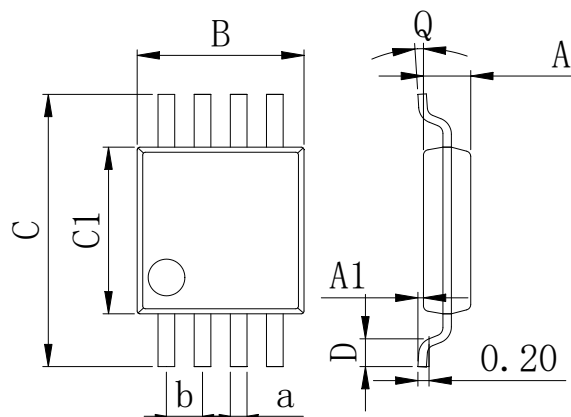

Dimensions In Millimeters(MSOP8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.80	0.05	2.90	4.75	2.90	0.35	0°	0.25	0.65 BSC
Max:	0.90	0.20	3.10	5.05	3.10	0.75	8°	0.35	

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.