

规格书编号

SPEC NO:

# 产品规格书

## SPECIFICATION

CUSTOMER 客 户: \_\_\_\_\_

PRODUCT 产 品: \_\_\_\_\_ SAW RESONATOR

MODEL NO 型 号: \_\_\_\_\_ HDR433M-B24

PREPARED 编 制: \_\_\_\_\_ CHECKED 审 核: \_\_\_\_\_

APPROVED 批 准: \_\_\_\_\_ D A T E 日 期: \_\_\_\_\_ 2019-07-03

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

## 更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

## 1. Scope

This specification shall cover the characteristics of 1-port SAW resonator with R433M used for remote-control security.


## 2. Electrical Specification

### 2.1 Maximum Rating


DC Voltage VDC	10V
AC Voltage Vpp	10V 50Hz/60Hz
Operation temperature	-40℃ to +85℃
Storage temperature	-45℃ to +85℃
Max Input Power	10dBm

### 2.2 Electronic Characteristics


Item		Unites	Minimum	Typical	Maximum
Center Frequency		MHz	433.820	433.920	434.020
Insertion Loss		dB		1.8	2.2
Quality Factor	Unload Q		8300	12000	
	50Ω Loaded Q		850	1500	
Temperature	Turnover Temperature	℃	10	25	40
Stability	Freq.temp.Coefficient	ppm/℃		0.032	
Frequency Aging		ppm/yr		<±10	
DC. Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R1	Ω		18	26
	Motional Inductance L1	μH		79.82	
	Motional Capacitance C1	fF		1.685	
Transducer Static Capacitance C0		pF		2.3	

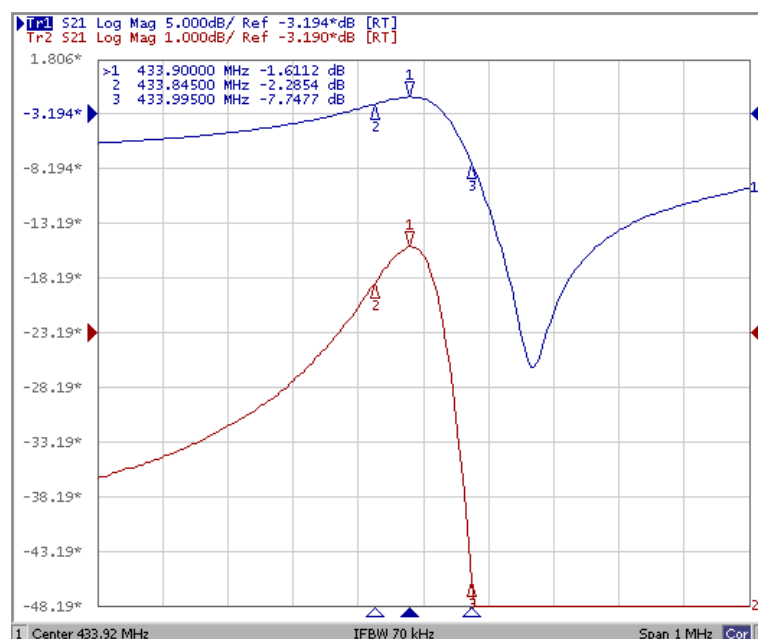

### 3. TEST CIRCUIT

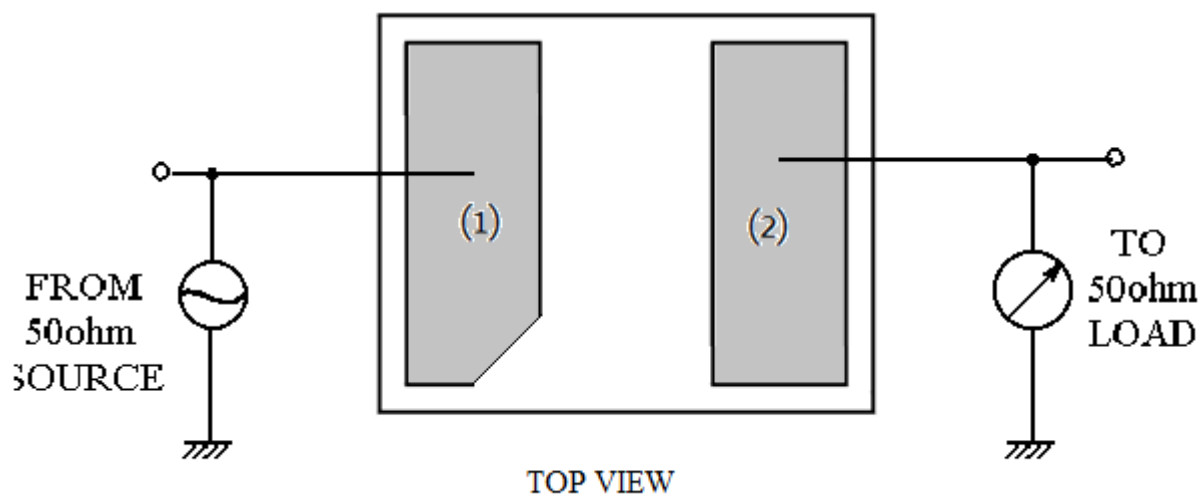

### 4. DIMENSION

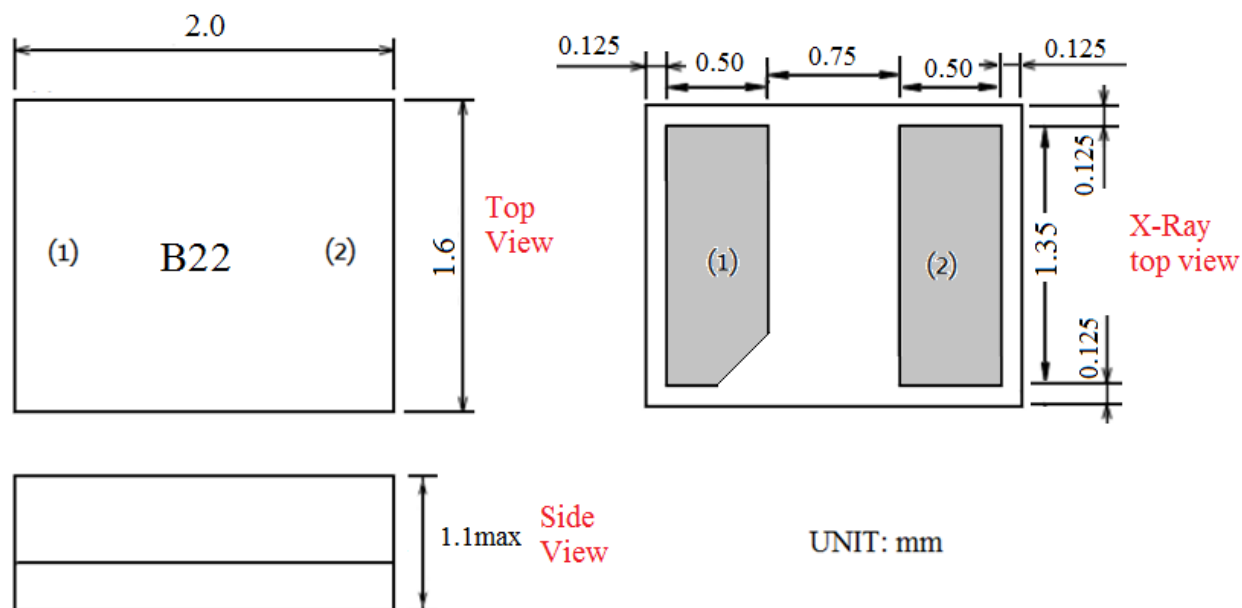

### Pin configuration

1. Input/Output
2. Output/Input

### 5. Environment Characteristic

#### 5-1 High temperature exposure

Subject the device to +85°C for 16 hours. Then release the filter into the room conditions

for 24 hours prior to the measurement. It shall fulfill the specifications in 2-2.

#### 5-2 Low temperature exposure

Subject the device to  $-40^{\circ}\text{C}$  for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in 2-2.

#### 5-3 Temperature cycling

Subject the device to a low temperature of  $-40^{\circ}\text{C}$  for 30 minutes. Following by a high temperature of  $+85^{\circ}\text{C}$  for 30 Minutes. Then release the device into the room conditions for 24 hours prior to the measurement. It shall meet the specifications in 2-2.

#### 5-4 Resistance to solder heat

Dip the device terminals no closer than 1.5mm into the solder bath at  $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$  for  $10 \pm 1$  sec. Then release the device into the room conditions for 4 hours. The device shall meet the specifications in 2-2.

#### 5-5 Solderability

Subject the device terminals into the solder bath at  $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$  for 5s, More than 95% area of the terminals must be covered with new solder. It shall meet the specifications in 2-2.

#### 5-6 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1m 3 times. the device shall fulfill the specifications in 2-2.

#### 5-7 Vibration

Subject the device to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications in 2-2.

## 6. Remark

#### 6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

#### 6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

#### 6.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.

## 7. Packing

#### 7.1 Dimensions

(1) Carrier Tape: Figure 1

(2) Reel: Figure 2


(3) The product shall be packed properly not to be damaged during transportation and storage.

#### 7.2 Reeling Quantity

1000 pcs/reel 7"

#### 7.3 Taping Structure


(1) The tape shall be wound around the reel in the direction shown below.

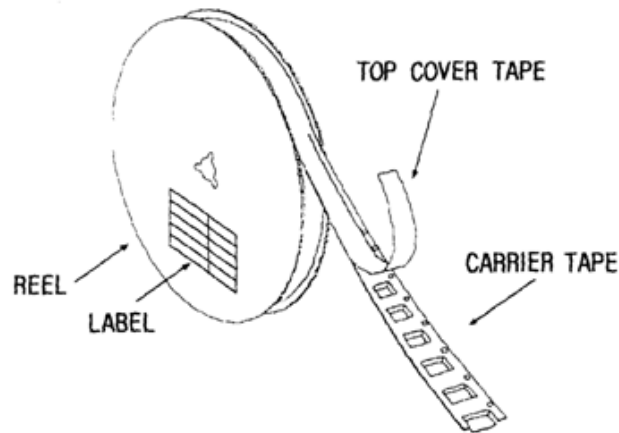

(2) Label

Device Name	
User Product Name	
Quantity	
Lot No.	

(3) Leader part and vacant position specifications.

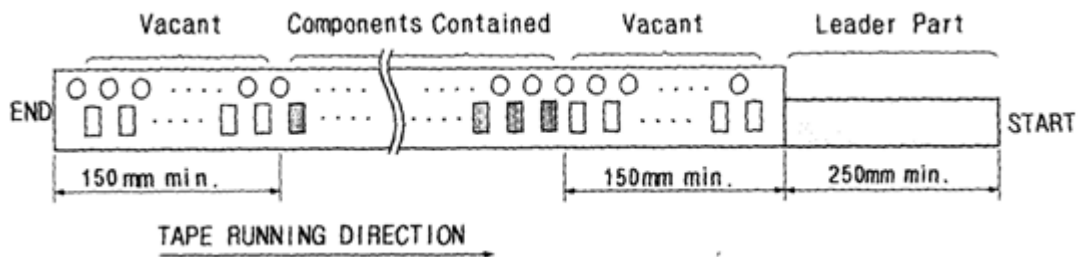

## 8. TAPE SPECIFICATIONS


8.1 Tensile Strength of Carrier Tape: 4.4N/mm width

8.2 Top Cover Tape Adhesion (See the below figure)


(1) pull off angle: 0~15°

(2) speed: 300mm/min.


(3) force: 20~70g

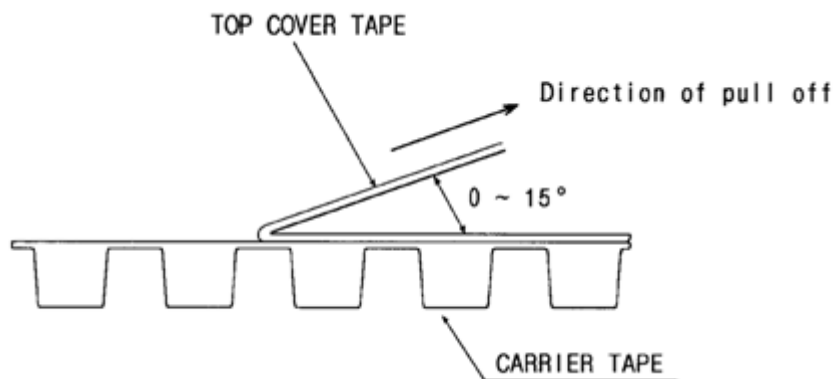

[Figure 1] Carrier Tape Dimensions

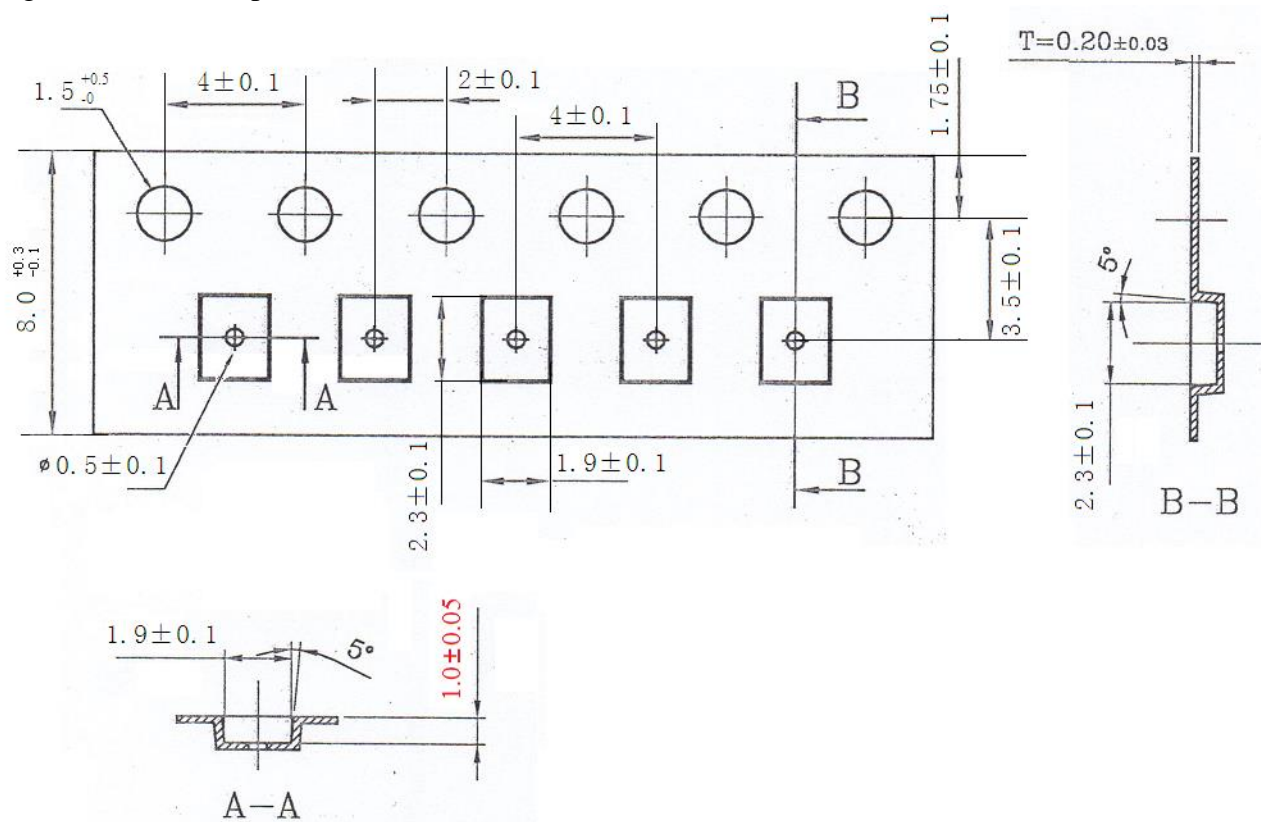

[Figure 2] 10000 pcs/reel

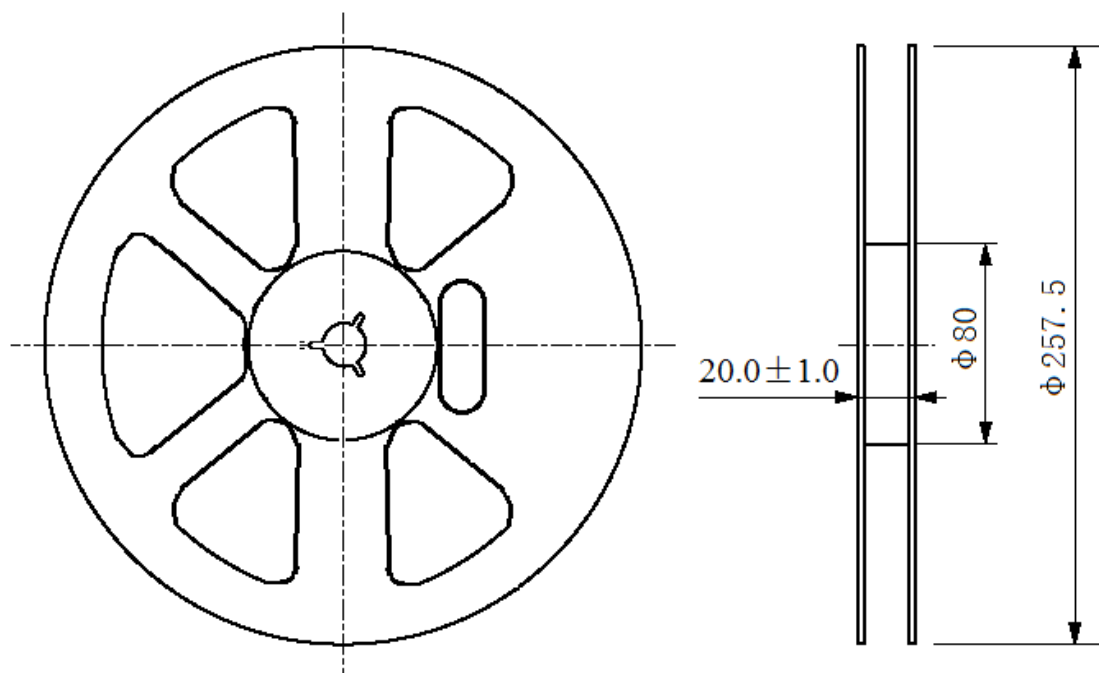

$\phi 257.5$  Reel Dimension

(in mm)