

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V

Forward Current - 3.0A

## FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

## MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

## PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code: DS32W ---S32  
 DS34W ---S34  
 DS36W ---S36  
 DS38W ---S38  
 DS310W ---S310  
 DS312W ---S312  
 DS315W ---S315  
 DS320W ---S320

Simplified outline SOD-123FL and symbol


## Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %


Parameter	Symbols	DS32W	DS34W	DS36W	DS38W	DS310W	DS312W	DS315W	DS320W	Units
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>									A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>				80				70	A
Max Instantaneous Forward Voltage at 3 A	V <sub>F</sub>		0.55		0.70		0.85		0.95	V
Maximum DC Reverse Current T <sub>a</sub> = 25°C at Rated DC Reverse Voltage T <sub>a</sub> = 100°C	I <sub>R</sub>	0.5 10				0.3 5				mA
Typical Junction Capacitance <sup>1)</sup>	C <sub>j</sub>	250				160				pF
Typical Thermal Resistance <sup>2)</sup>	R <sub>θJA</sub>				65					°C/W
Operating Junction Temperature Range	T <sub>j</sub>				-55 ~ +125					°C
Storage Temperature Range	T <sub>stg</sub>				-55 ~ +150					°C

1) Measured at 1MHz and applied reverse voltage of 4 V D.C. 2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

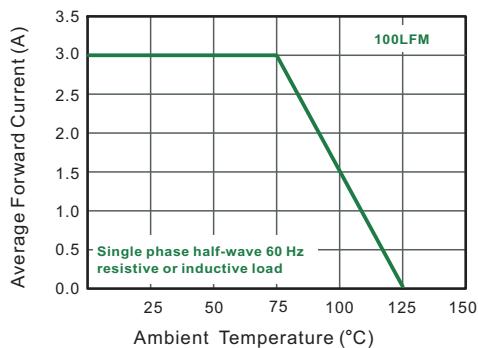


**Fig.2 Typical Reverse Characteristics**

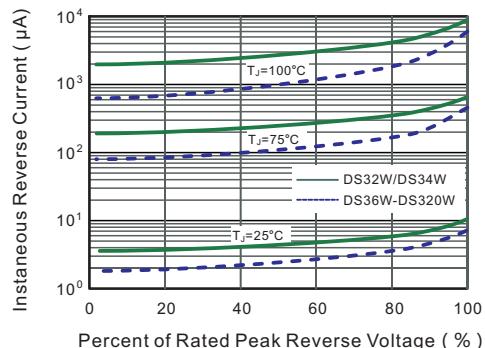


**Fig.3 Typical Forward Characteristic**

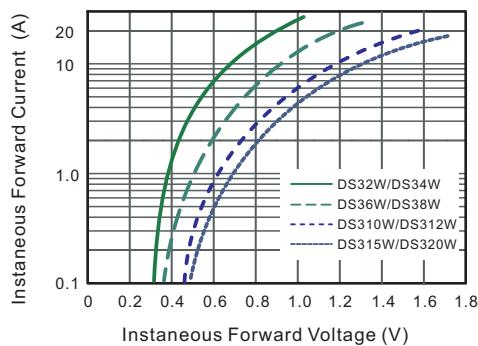


**Fig.4 Typical Junction Capacitance**

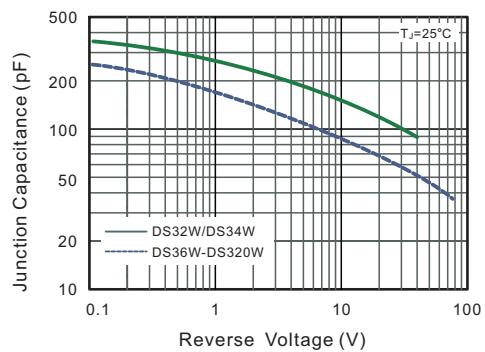

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

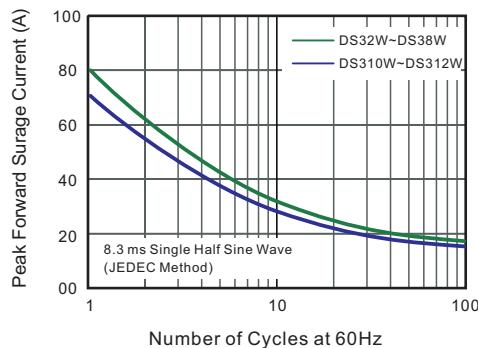


**Fig.6- Typical Transient Thermal Impedance**

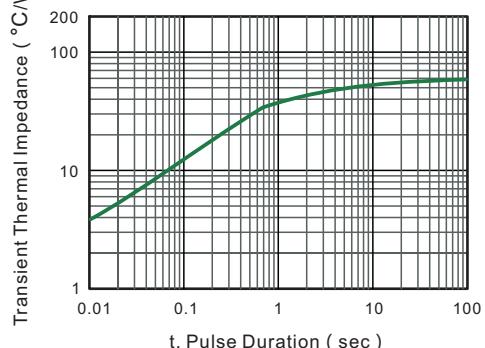

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

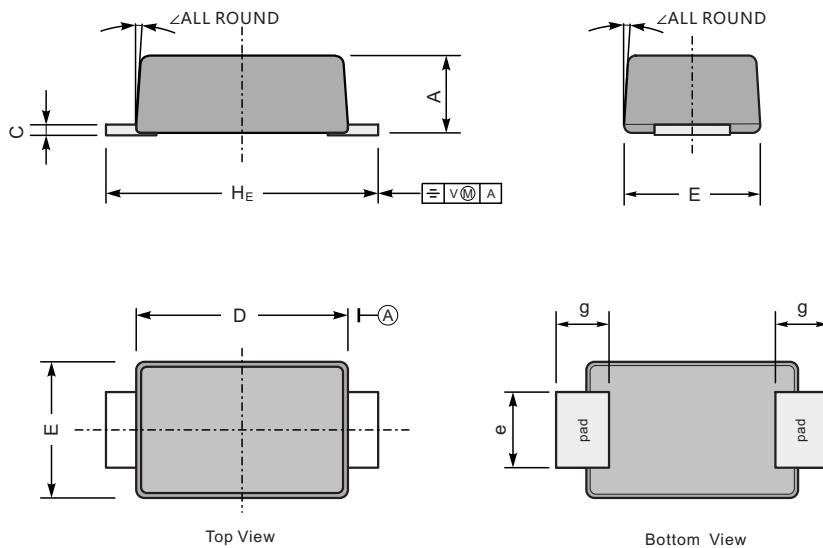

UNIT		A	C	D	E	e	g	H <sub>E</sub>	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	7°
	min	35	4.7	102	67	31	28	138	

### The recommended mounting pad size

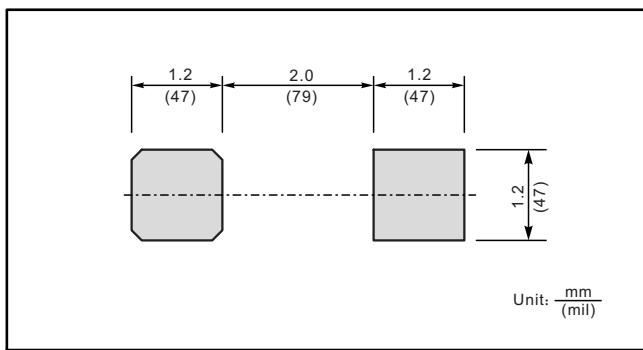

### Marking

Type number	Marking code
DS32W	S32
DS34W	S34
DS36W	S36
DS38W	S38
DS310W	S310
DS312W	S312
DS315W	S315
DS320W	S320