



## 2A SURFACE MOUNT SCHOTTKY BRIDGE

### FEATURES:


- Reverse Voltage - 40 to 200 V
- Forward Current - 2 A
- High Surge Current Capability
- Designed for Surface Mount Application

### PINNING

| PIN | DESCRIPTION          |
|-----|----------------------|
| 1   | Input Pin ( ~ )      |
| 2   | Input Pin ( ~ )      |
| 3   | Output Anode ( + )   |
| 4   | Output Cathode ( - ) |

### MECHANICAL DATA

- Case: ABS/LBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 88mg 0.0031oz

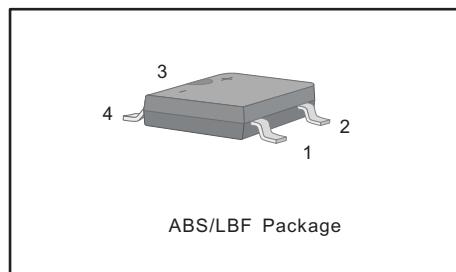

### Maximum Ratings and Electrical characteristics






Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| Parameter  | Symbols            | TB24S      | TB26S | TB28S    | TB210S | TB220S | Units |  |  |  |  |  |
|--|--------------------|------------|-------|----------|--------|--------|-------|--|--|--|--|--|
| Maximum Repetitive Peak Reverse Voltage  | V <sub>RRM</sub>   | 40         | 60    | 80       | 100    | 200    | V     |  |  |  |  |  |
| Maximum RMS voltage  | V <sub>RMS</sub>   | 28         | 42    | 56       | 70     | 140    | V     |  |  |  |  |  |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>    | 40         | 60    | 80       | 100    | 200    | V     |  |  |  |  |  |
| Maximum Average Forward Rectified Current  | I <sub>F(AV)</sub> | 2.0        |       |          |        |        | A     |  |  |  |  |  |
| Peak Forward Surge Current,8.3ms<br>Single Half Sine-wave Superimposed<br>on Rated Load (JEDEC method) | I <sub>FSM</sub>   | 50         |       | 40       |        | A      |       |  |  |  |  |  |
| Max Instantaneous Forward Voltage at 2A  | V <sub>F</sub>     | 0.55       | 0.70  | 0.85     |        |        | V     |  |  |  |  |  |
| Maximum DC Reverse Current T <sub>a</sub> = 25°C<br>at Rated DC Reverse Voltage T <sub>a</sub> = 100°C | I <sub>R</sub>     | 0.5<br>10  |       | 0.3<br>5 |        | mA     |       |  |  |  |  |  |
| Typical Junction Capacitance <sup>1)</sup>   | C <sub>j</sub>     | 220        | 80    |          |        | pF     |       |  |  |  |  |  |
| Typical Thermal Resistance <sup>2)</sup>   | R <sub>θJA</sub>   | 70         |       |          |        | °C/W   |       |  |  |  |  |  |
| Operating Junction Temperature Range   | T <sub>j</sub>     | -55 ~ +150 |       |          |        | °C     |       |  |  |  |  |  |
| Storage Temperature Range  | T <sub>stg</sub>   | -55 ~ +150 |       |          |        | °C     |       |  |  |  |  |  |

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.

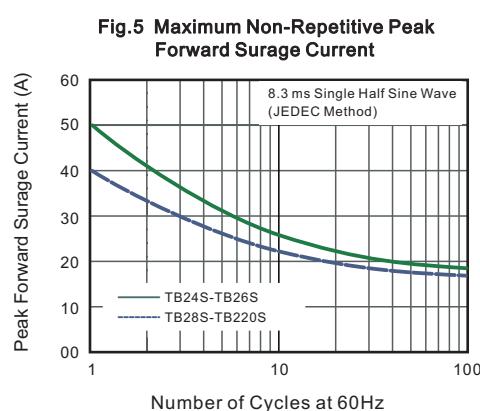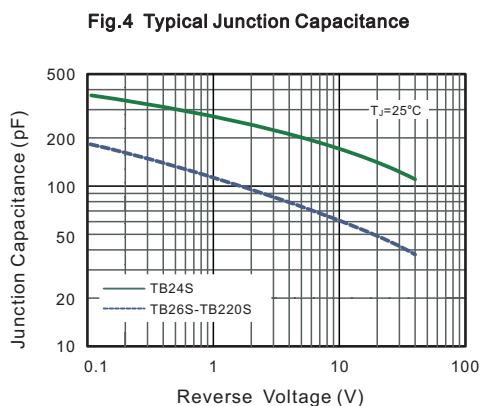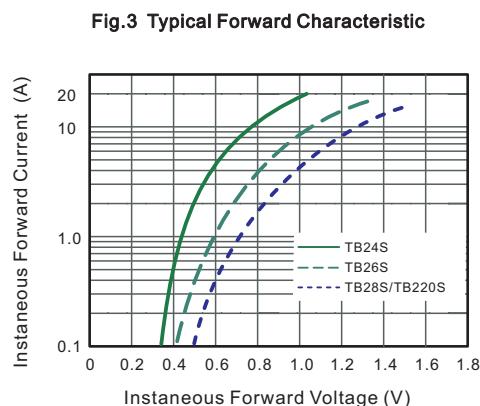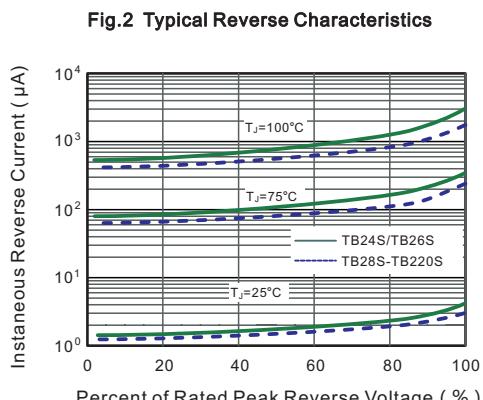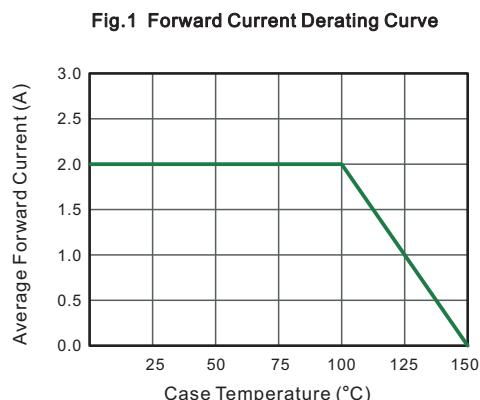





## PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

ABS/LBF

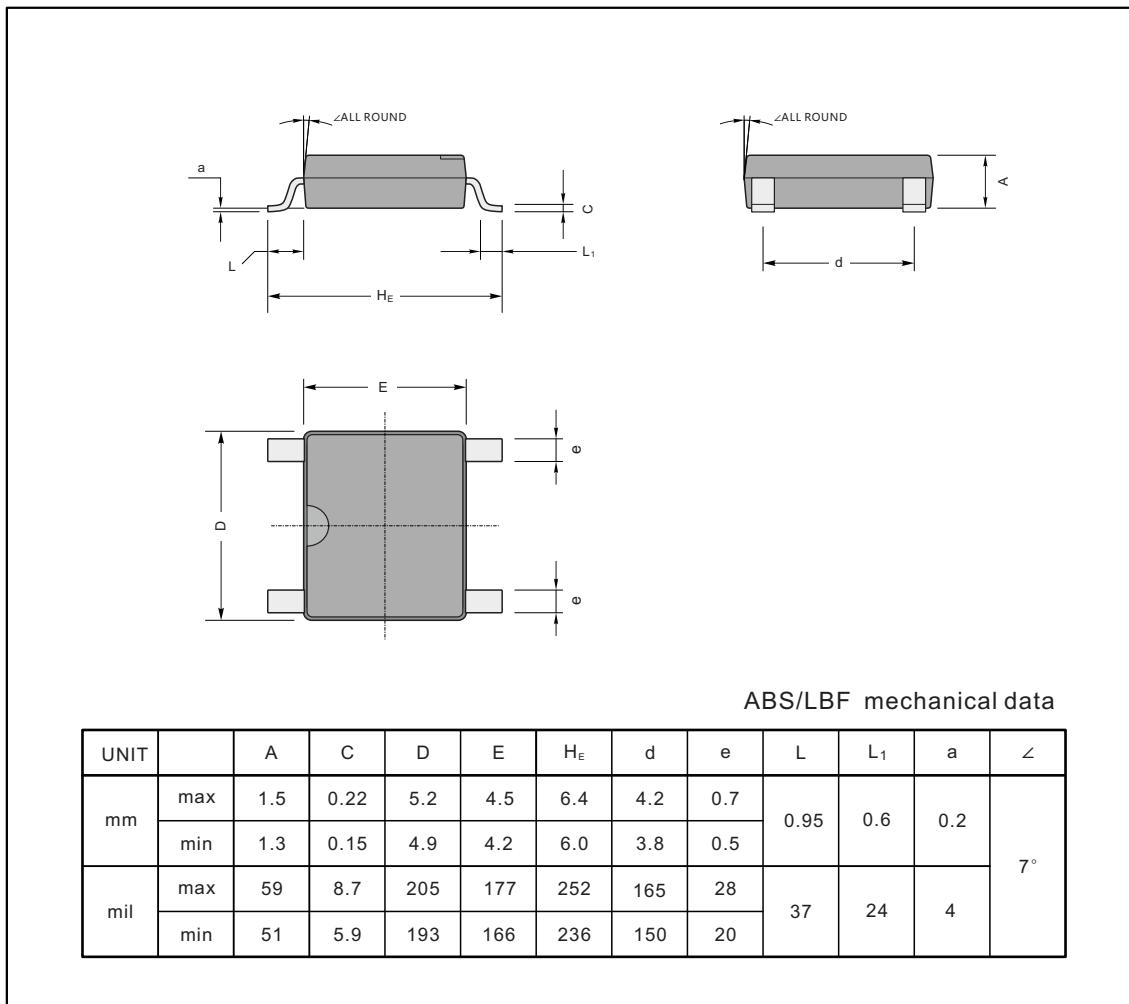

## The recommended mounting pad size

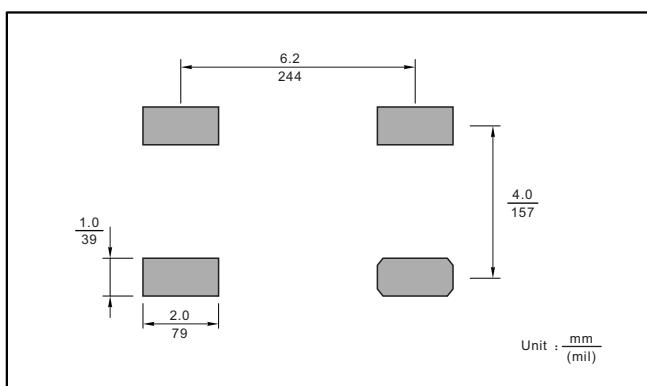

## Marking

| Type number | Marking code |
|-------------|--------------|
| TB24S       | TB24S        |
| TB26S       | TB26S        |
| TB28S       | TB28S        |
| TB210S      | TB210S       |
| TB220S      | TB220S       |