

## Features

- ♦ Ideal for printed circuit boards
- ♦ High surge current capability
- ♦ High case dielectric strength of 1500V<sub>RMS</sub>
- ♦ Solder dip 260 °C, 40 s

## Mechanical Data

- ♦ Case:GBU
- Expoxy meers UL-94V-0 Flammability rating
- ♦ Teminals:Matte tin plated(E3 Suffix) leads,solderable per J-STD-002B and JESD22-B102D
- ♦ Polarity:As marked on body
- ♦ Mounting torquw:10 cm-kG (8.8 inches-lbs) max.
- ♦ Recommended Torque:5.7 cm-kG (5 inches-lbs)

## Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications.

## Maximum Ratings (TA = 25 °C unless otherwise noted)

Parameter	Symbol	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_C=60^{\circ}\text{C}$ <sup>(1)</sup>	IF(AV)	8.0							A
$T_A=25^{\circ}\text{C}$ <sup>(2)</sup>		3.0							
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	200							A
Rating for fusing( $t<8.3\text{ms}$ )	$I^2t$	166							A <sup>2</sup> sec
Operating junction and storage temperature range	TJ, TSTG	- 55 to + 150							°C

## Electrical Characteristics (TA = 25 °C unless otherwise noted)

Parameter	Test Conditions	Symbol	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	Unit
Maximum instantaneous forward voltage drop per leg at 4.0A		V <sub>F</sub>	1.00							Volts
Maximum DC reverse current at rated DC blocking voltage per leg	TA=25°C TA=125°C	I <sub>R</sub>	5.0 500							μA
Typical junction capacitance per leg	4.0 V, 1 MHz	C <sub>J</sub>	211				94			pF

## Thermal Characteristics

Parameter	Symbol	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	Unit
Typical thermal resistance per leg	$R_{\theta JA}^{(2)}$	20							°C/W
	$R_{\theta JC}^{(1,3)}$	4.0							

Notes: 1. Unit case mounted on 14\*14\*0.15 cm thick AL plate heatsink

2. Units mounted in free air, no heatsink on P.C.B. with 0.5\*0.5" (12.7\*12.7mm) copper pads and 0.375"(9.5mm) lead length

3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screws

## Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

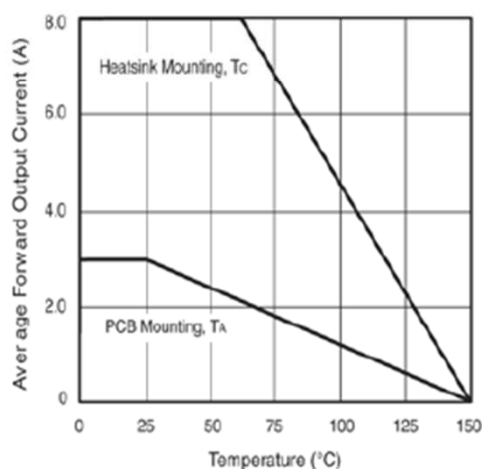


Figure 1. Derating Curve Output Rectified Current

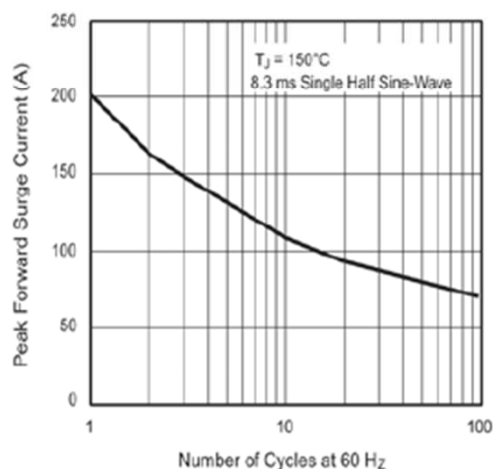


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

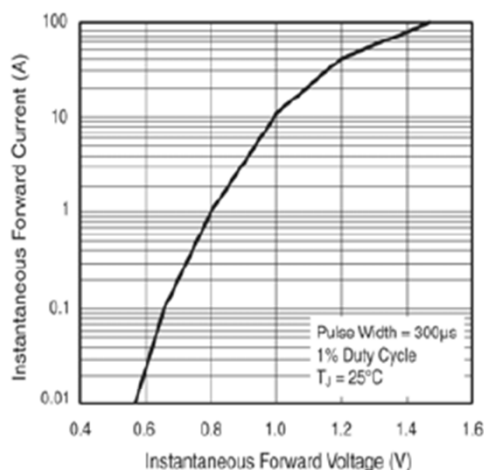


Figure 3. Typical Forward Characteristics Per Leg

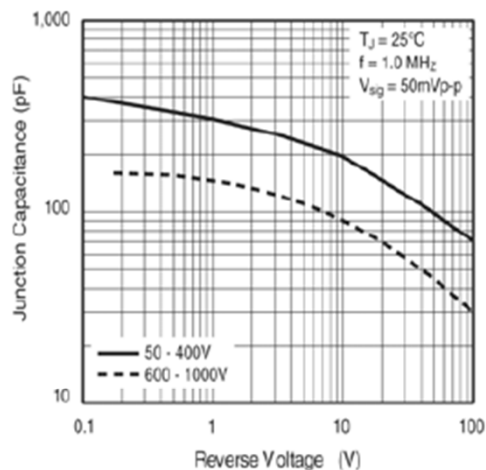


Figure 5. Typical Junction Capacitance Per Leg

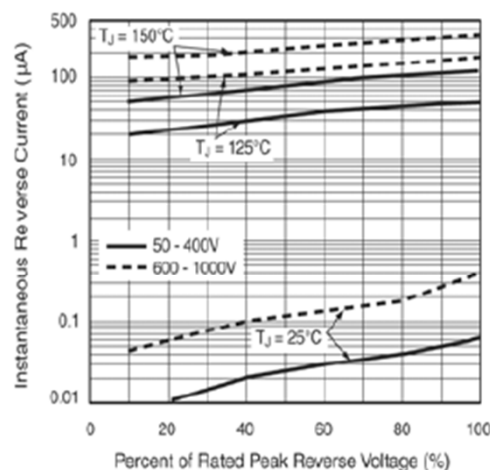


Figure 4. Typical Reverse Leakage Characteristics Per Leg


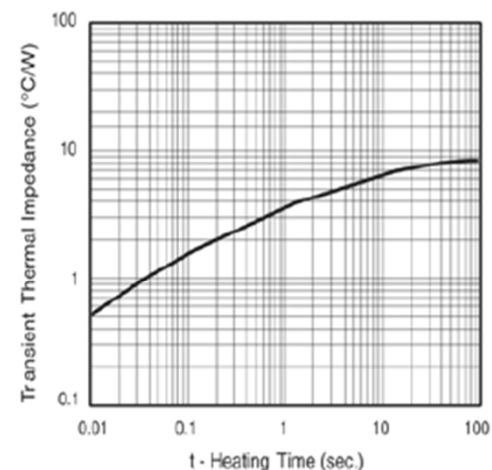


Figure 6. Typical Transient Thermal Impedance Per Leg

## Package Outline Dimensions



GBU		
Dim	Min	Max
A	21.70	22.30
B	18.20	19.10
C	17.27	18.29
D	3.40	4.10
E	7.40	7.90
F	1.65	2.30
G	1.52	2.54
H	1.65	2.54
I	0.90	1.27
J	4.80	5.30
K	3.20	3.80
L	1.70	2.20
M	0.40	0.60

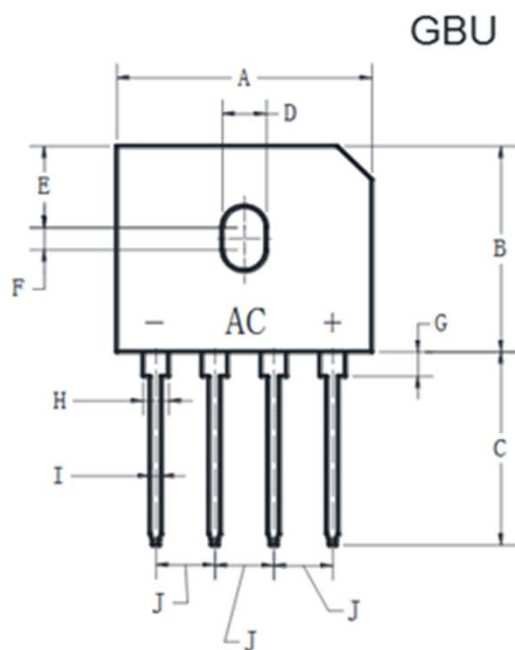

## Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.  
(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.