

VOLTAGE RANGE: 50 - 1000V

CURRENT: 3.0 A


Features

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0



Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

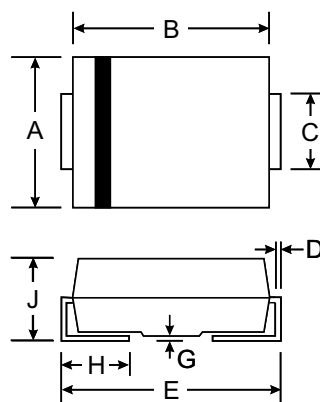

SMB(DO-214AA)		
Dim	Min	Max
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

CHARACTERISTICS	SYMBOL	HS3AB	HS3BB	HS3DB	HS3GB	HS3JB	HS3KB	HS3MB	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A =55 °C	I _(AV)	3.0							A
Peak Forward Surage Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	150							A
Peak Forward Voltage at 3.0A DC(Note1)	V _F	1.0			1.3	1.7			V
Maximum DC Reverse Current @T _J =25°C	I _R	5.0							uA
at Rated DC Blocking Voltage @T _J =100°C		100							
Maximum Reverse Recovery Time(Note 1)	T _{RR}	50				75			nS
Typical Junction Capacitance (Note2)	C _J	50				30			pF
Typical Thermal Resistance (Note3)	R _{JA}	20							°C/W
Operating Temperature Range	T _J	-50 to +150							°C
Storage Temperature Range	T _{STG}	-50 to +150							°C

NOTES: 1.Measured with I_F=0.5A, I_R=1A, I_{RR}=0.25A

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3.Thermal resistance junction to ambient

FIG. 1 – FORWARD CURRENT DERATING CURVE

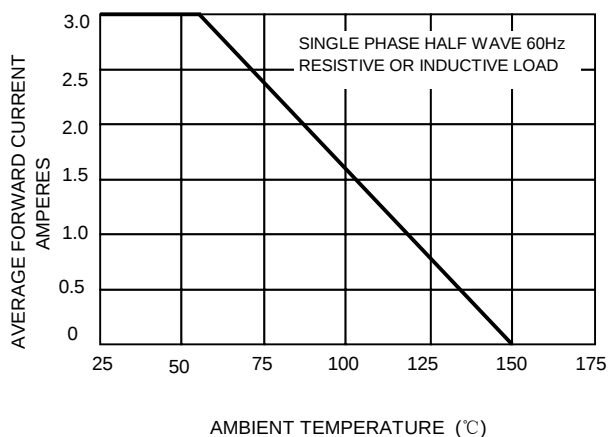


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

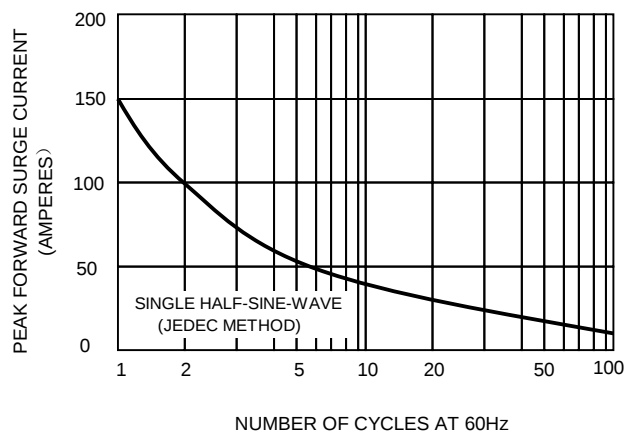


FIG.3 – TYPICAL JUNCTION CAPACITANCE

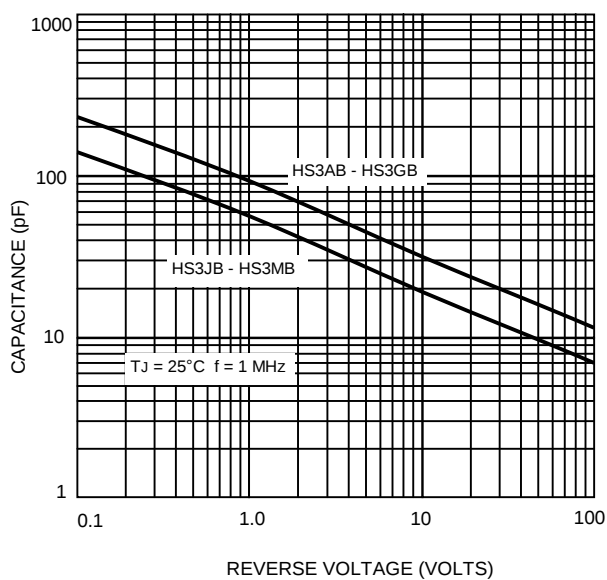


FIG.4-TYPICAL FORWARD CHARACTERISTICS

