
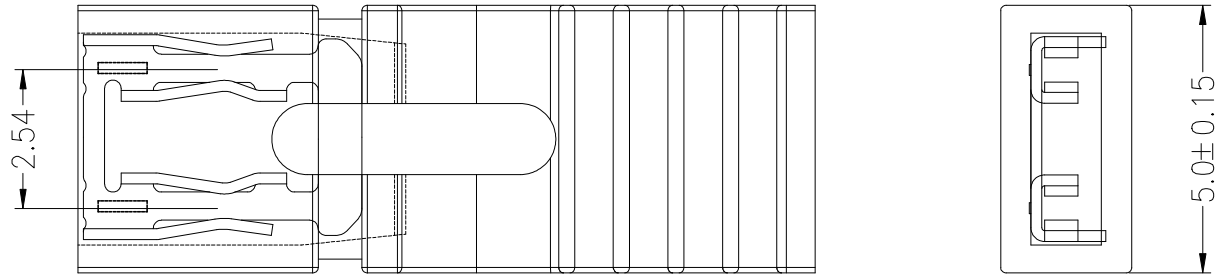


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material: Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA66
 Max.Processing Temp: 180°C for 30-60 seconds
 (230°C for 10 seconds)

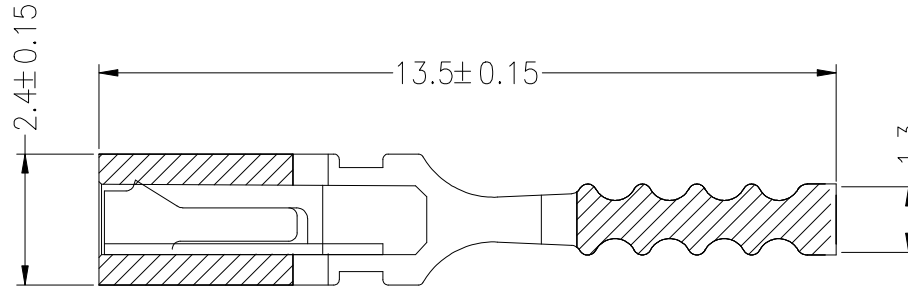

Ordering Information

3830 13 01 0 XX B 0X

Plastics Height
13=13.5mm

No.of Pins
01=Sing Type

Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 Ni:1U" Gold/Ni
 NN:Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

YiYuSheng

12.04.18

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

◆

JILN® 深圳市锦凌电子有限公司

SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

383013010XXB0X

TITLE:

2.54 Mini Jumper H13.5 1*2Pin Open Type

A

A0

2012.04.18

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

APPROVE

YiYuSheng

12.04.18

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

TITLE:

2.54 Mini Jumper H13.5 1*2Pin Open Type

A

1

2

3

4

5

6

7

8

9