


HSF RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

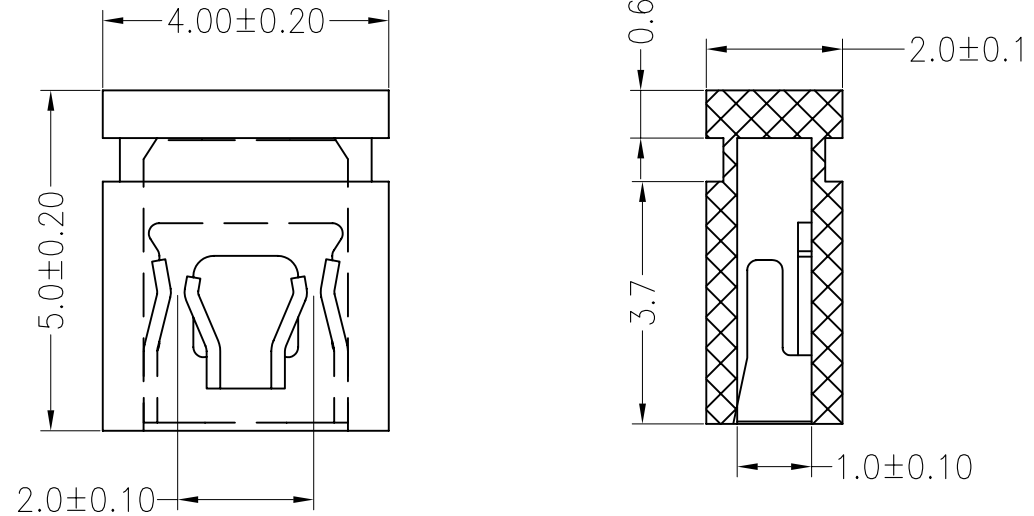


Ordering Information

3811 50 01 C XX B 01

Plastics Height
50=5.0mm

Contact Plating
 G0:0.8U" Gold
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 N0:Gold Flash/Ni
 Ni:Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow



				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	JiLN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			38115001CXXX01
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			2.00 Mini Jumper 1*2Pin Close Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					