

HSF




RoHS

A


B

C

D

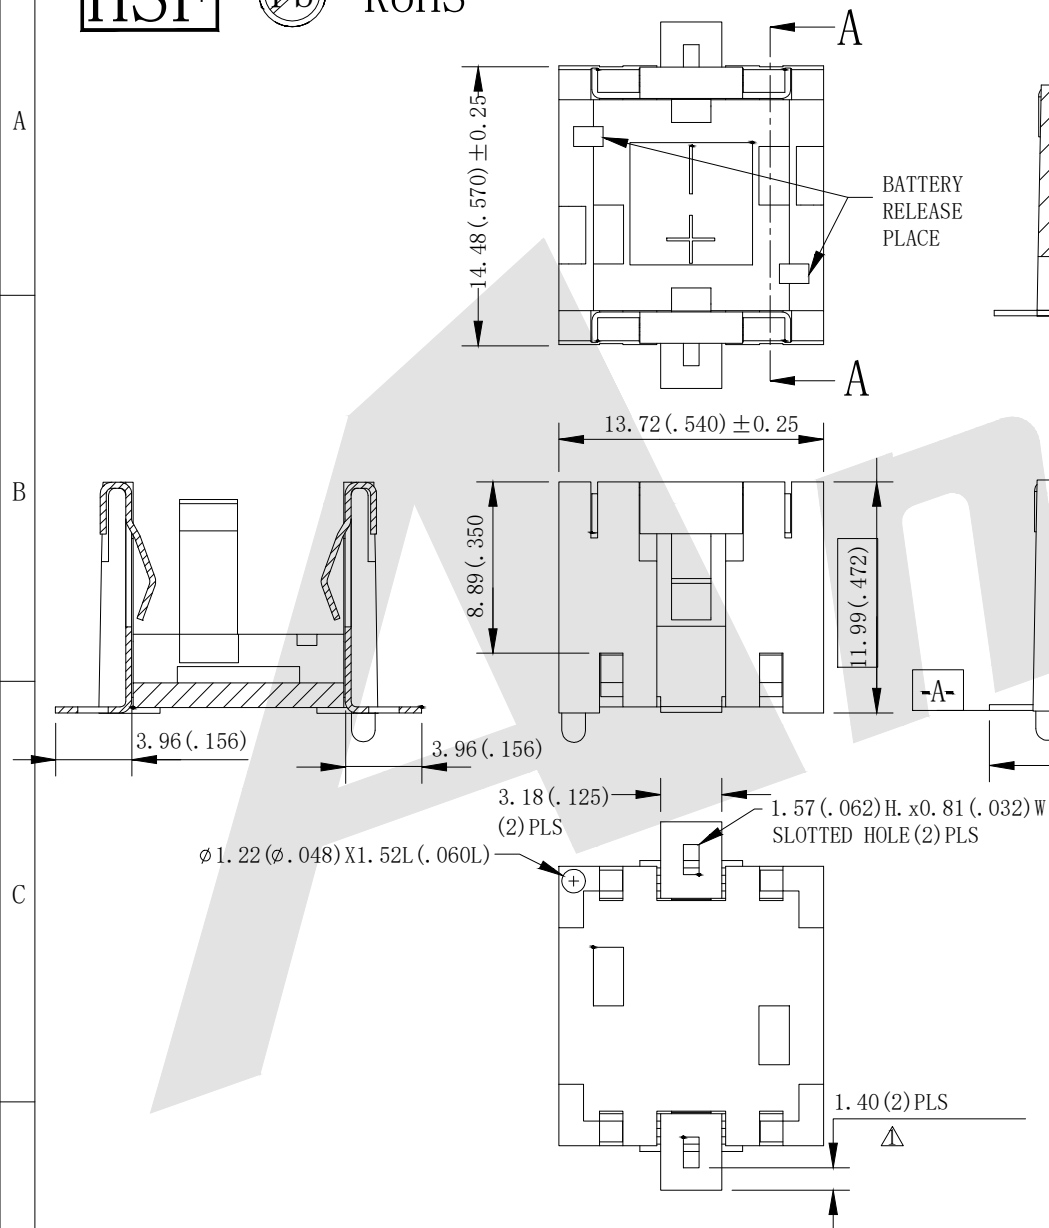

SECTION A-A

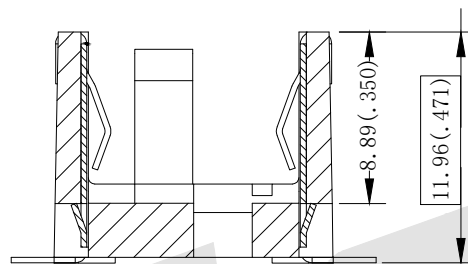

NOTE:

1. CONTACT: MAT "L
0.30 (.012) TH "K PHOSPHOR BRONZE
FINISH:
GOLD FLASH PLATING
.000003-.000005 GOLD, OVER
.000100-.000150 NICKEL PLATE
2. HOUSING: MAT "L
HEAT RESISTANCE NYLON (UL94V-0)

Order code:

BT — M — GO — R — CR498A
① ② ③ ④ ⑤


- ① BT: Coin Cell Holders
② Apperance for the product
M: SMT TYPE

- ③ Contact Plating
SN: Tin
GO: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold

- ④ Packing method
A: Tray packing
R: Tape & reel packing
⑤ Product number
CR498A


0.03 (.001)
0.10 (.005) CONTACT MUST PROTRUDE
BEYOND BASE TO MAX. OF.
0.10 (.005)

0.10 (.005) A



Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Lv Xun Hua DATE 23/03/2019
CHECK BobYang DATE 23/03/2019



Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: 1/3 N HORIZONTAL SMT
HOLDER

DRAWING NO: BT-M-GO-R-CR498A

PRODUCT NO: BT-M-GO-R-CR498A

Δ Change 1.17 to 1.40, 10.92 to 10.3

07/02/2022

REV DESCRIPTION

DATE

1

2

3

4

5

6

7

8