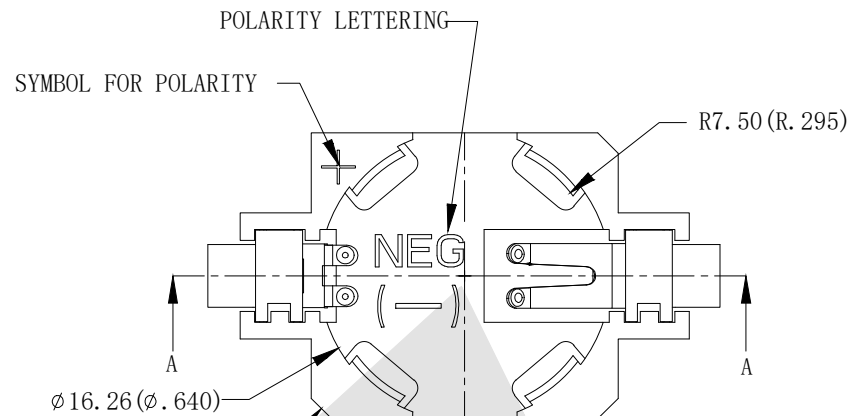


HSF




RoHS

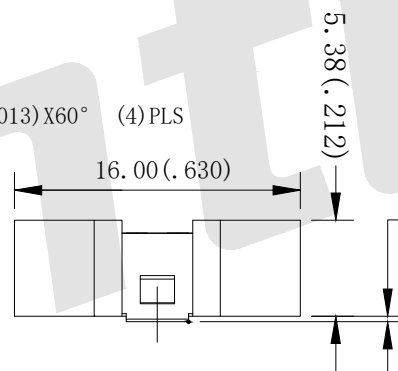
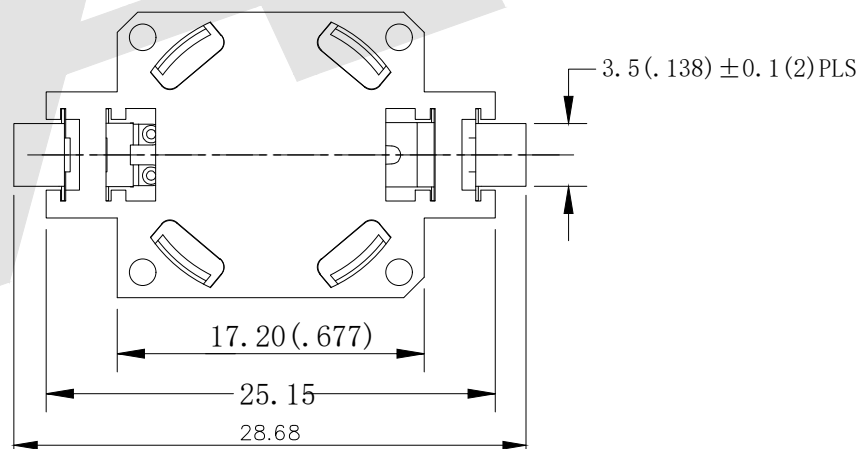
1. 14 (.045) x 45°
CHAMFER (3) PLS

SECTION A-A

CHAMFE R0.33 (.013) X 60° (4) PLS



0.12 A

0.025
0.127 CONTACT MUST PROTRUDE
BEYOND BASE TO MAX. OF 0.13 (.005)

NOTE:

- 1, BASE MAT'L: LCP 30% Glass Filled, UL94V-0
2. CONTACTS:
MAT'L: 0.15mm TH'K PHOSPHOR BRONZE
FINISH: 1 u" GOLD FLASH, OVER NICKEL PLATE

Order code:

BT - M - G0 - R - CR1632A

① ② ③ ④ ⑤

- ① BT: Coin Cell Holders
② Appearance for the product
M: SMT TYPE


- ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold

- ④ Packing method
A: Tray packing
R: Tape & reel packing

- ⑤ Product number
CR1632A

Unless Otherwise specified tolerance

X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE:
As Shown UNIT:
mmDRAW
Wu Feng Rong DATE
25/03/2019CHECK
BobYang DATE
25/03/2019

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

Coin Cell Holders For CR1632

DRAWING NO: BT-M-G0-R-CR1632A

PRODUCT NO: BT-M-G0-R-CR1632A

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8