



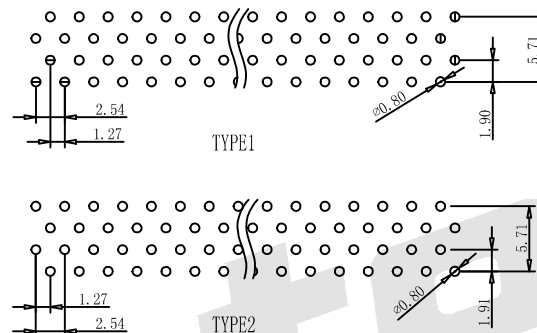

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)



SECTION A-A

Current Rating:	1.0Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0

Ordering Code:

BHBS01 - X - X - X - X - X - X

(1) (2) (3) (4) (5) (6) (7)

- ① Series No:
② No.of Contacts
06 08 10 14
16 20 26 30
34 40 50 60
80 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u"Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑦ Series No.
A:Type1
B:Type2

Unless Otherwise specified tolerance		 ANTENK ELECTRONICS CO., LTD Http://www.antenk.com E-mail:sales@antenk.com
X. ± 0.35 X.XX: ± 0.20 X.X: ± 0.25 X.XXX: ± 0.15		
SCALE: As Shown	UNIT: mm	TITLE: 1.27*2.54mm Box Header 180° H=10.5 Four Row DIP
DRAW YG ZHONG	DATE 01/05/2016	
CHECK BobYang	DATE 01/05/2016	
 3rd ANGLE PROJECTION		DRAWING NO: BHBS01-XXXXXX PRODUCT NO: BHBS01-XXXXXX