





HSF

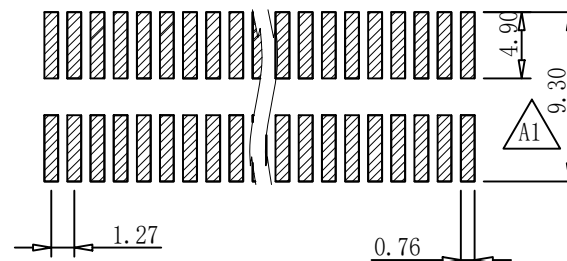

RoHS

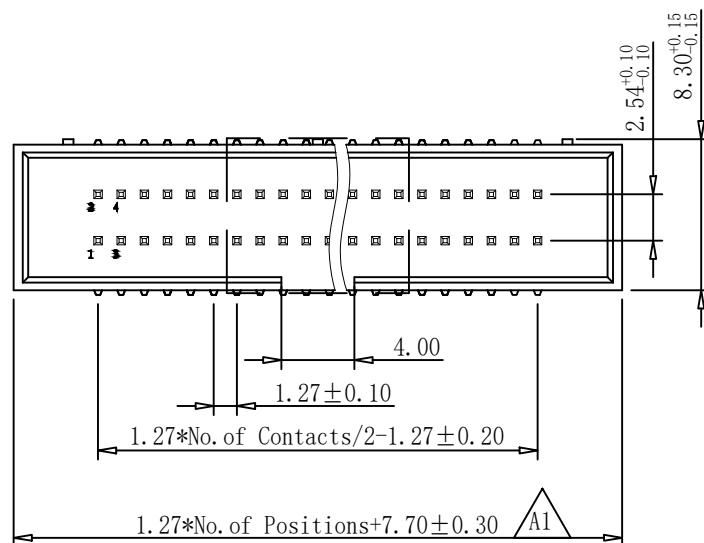

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

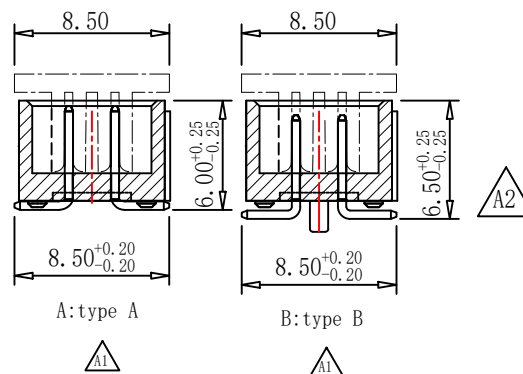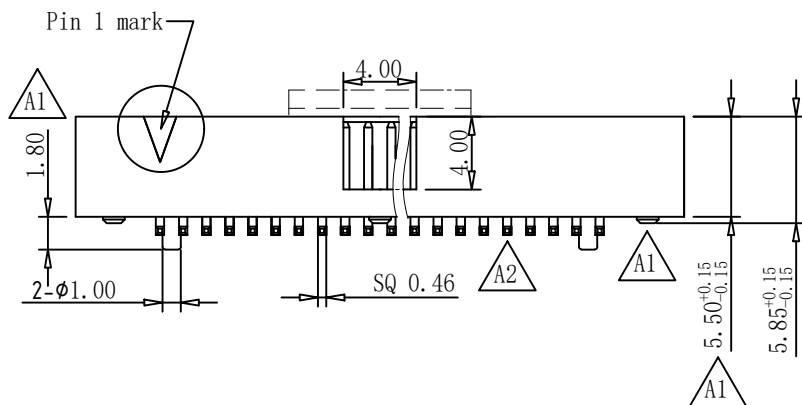

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0

Ordering Code:

BHBM01 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$

- ① Series No:
- ② No. of Contacts
- | | | | | | |
|----|----|----------------|----|----|----|
| 08 | 10 | 14 | 16 | 20 | 24 |
| 26 | 30 | 34 | 40 | 50 | 56 |
| 60 | 80 | 100 | | | |
- ③ Contact Plating:
- G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Color Insulator
- B: Black
U: Blue
W: White
- ⑤ Insulator Material
- B: PA6T
C: LCP
E: PA9T
- ⑥ Packing
- A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑦ With locating pegs option
- A: type A without pegs
B: type B with pegs


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW YG ZHONG DATE 01/05/2016

CHECK BobYang DATE 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: 1.27*2.54mm Box Header SMT H=5.90

DRAWING NO: BHBM01-XXXXXX

PRODUCT NO: BHBM01-XXXXXX

Revise Pin No.

09/14/2023

Change 6.0 to 6.5

11/29/2022

Revise Structure and dimension

10/27/2022

DESCRIPTION

DATE

A3

A2

A1

MKS.