
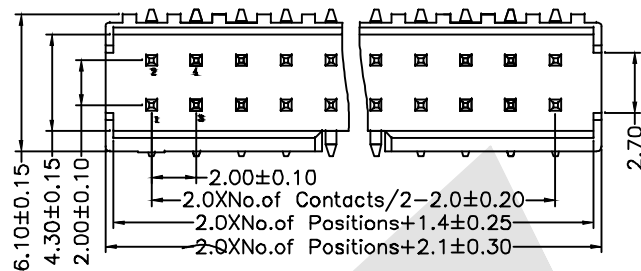

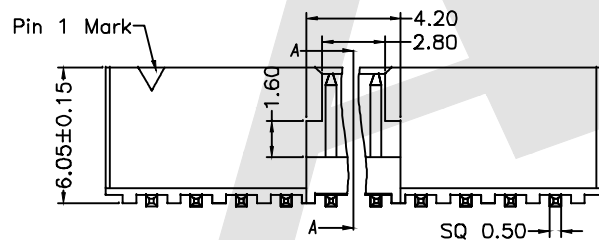


HSF

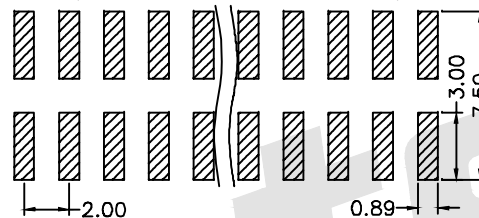

ROHS

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATION:

Current Rating:	2.0 Amp
Insulation Resistance:	1000M Ω min
Contact Resistance:	20M Ω max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0


Ordering Code:

BHCM04 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
06 08 10 14
16 20 24 26
30 34 40 44
50 60
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016



Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.0 Box Header SMT
Type H=6.1mm

DRAWING NO: BHCM04-XXXXX

PRODUCT NO: BHCM04-XXXXX

REV DESCRIPTION

DATE