

Sensitive Gate Silicon Controlled Rectifiers



Features

- ◆ Repetitive Peak Off-State Voltage : 400V
- ◆ R.M.S On-State Current ($I_{T(RMS)} = 0.8 \text{ A}$)
- ◆ Low On-State Voltage (1.2V(Typ.)@ I_{TM})
- ◆ Available with tape & reel
- ◆ MARKING:BT169D

General Description

Sensitive triggering SCR is suitable for the application where gate current limited such as small motor control, gate driver for large SCR, sensing and detecting circuits.

Symbol



SOT-89-3L

Absolute Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		400	V
$I_{T(AV)}$	Average On-State Current	Half Sine Wave : $T_C = 112^\circ\text{C}$	0.5	A
$I_{T(RMS)}$	R.M.S On-State Current	All Conduction Angle	0.8	A
I_{TSM}	Surge On-State Current	1/2 Cycle, 60Hz, Sine Wave Non-Repetitive	10	A
I^2t	I^2t for Fusing	$t = 8.3\text{ms}$	0.415	A^2s
P_{GM}	Forward Peak Gate Power Dissipation		2	W
$P_{G(AV)}$	Forward Average Gate Power Dissipation		0.1	W
I_{FGM}	Forward Peak Gate Current		1	A
V_{RGM}	Reverse Peak Gate Voltage		5.0	V
T_J	Operating Junction Temperature		- 40 ~ 125	$^\circ\text{C}$
T_{STG}	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$





Electrical Characteristics ($T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_{\text{AK}} = V_{\text{DRM}}$ or V_{RRM} ; $R_{\text{GK}} = 1000\ \Omega$ $T_C = 25\text{ }^{\circ}\text{C}$ $T_C = 125\text{ }^{\circ}\text{C}$	— —	— —	10 200	μA
V_{TM}	Peak On-State Voltage (1)	($I_{\text{TM}} = 1\text{ A}$, Peak)	—	1.2	1.7	V
I_{GT}	Gate Trigger Current (2)	$V_{\text{AK}} = 6\text{ V}$, $R_L = 100\ \Omega$ $T_C = 25\text{ }^{\circ}\text{C}$ $T_C = -40\text{ }^{\circ}\text{C}$	— —	— —	200 500	μA
V_{GT}	Gate Trigger Voltage (2)	$V_D = 7\text{ V}$, $R_L = 100\ \Omega$ $T_C = 25\text{ }^{\circ}\text{C}$ $T_C = -40\text{ }^{\circ}\text{C}$	— —	— —	0.8 1.2	V
V_{GD}	Non-Trigger Gate Voltage (1)	$V_{\text{AK}} = 12\text{ V}$, $R_L = 100\ \Omega$ $T_C = 125\text{ }^{\circ}\text{C}$	0.2	—	—	V
dv/dt	Critical Rate of Rise Off-State Voltage	$V_D = \text{Rated } V_{\text{DRM}}$, Exponential waveform, $R_{\text{GK}} = 1000\ \Omega$ $T_J = 125\text{ }^{\circ}\text{C}$	500	800	—	$\text{V}/\mu\text{s}$
di/dt	Critical Rate of Rise On-State Current	$I_{\text{PK}} = 20\text{ A}$; $P_W = 10\mu\text{s}$; $di_G/dt = 1\text{ A}/\mu\text{s}$ $I_{\text{gt}} = 20\text{ mA}$	—	—	50	$\text{A}/\mu\text{s}$
I_{H}	Holding Current	$V_{\text{AK}} = 12\text{ V}$, Gate Open Initiating Current = 20mA $T_C = 25\text{ }^{\circ}\text{C}$ $T_C = -40\text{ }^{\circ}\text{C}$	— —	2 —	5.0 10	mA
$R_{\text{th(j-c)}}$	Thermal Impedance	Junction to case	—	—	15	$^{\circ}\text{C}/\text{W}$
$R_{\text{th(j-a)}}$	Thermal Impedance	Junction to Ambient	—	—	125	$^{\circ}\text{C}/\text{W}$


※ Notes :

1. Pulse Width $\leq 1.0\text{ ms}$, Duty cycle $\leq 1\%$
2. Does not include R_{GK} in measurement.

Typical Characteristics

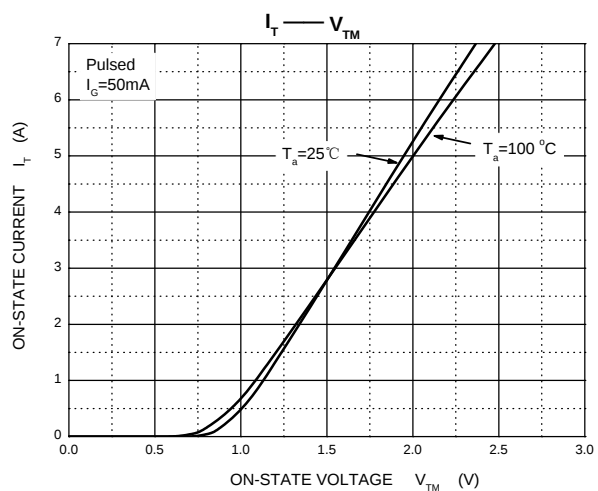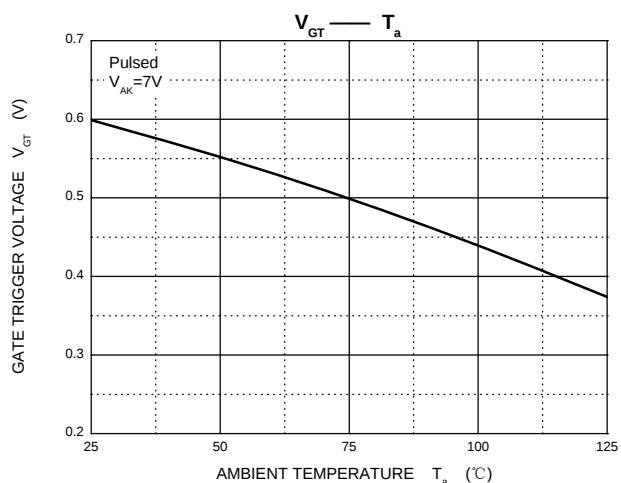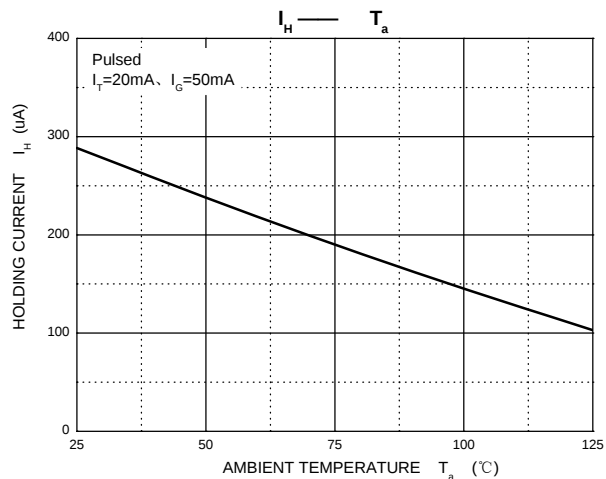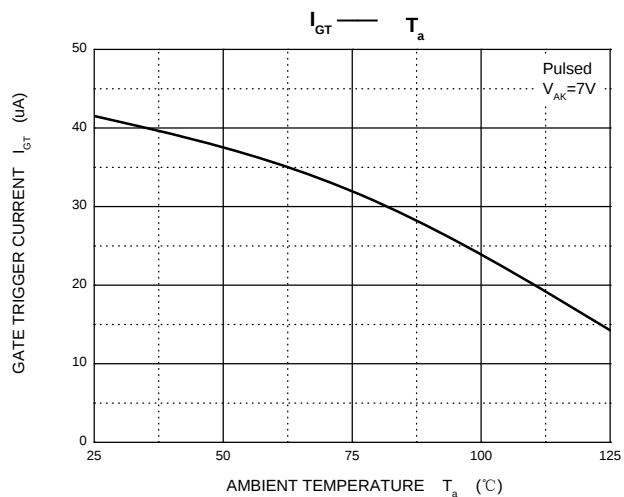

SOT-89-3L Outlines Dimensions

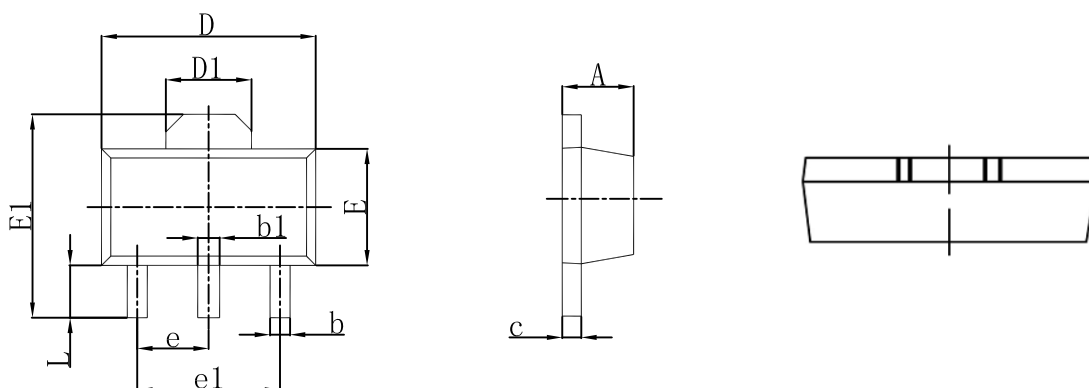

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047