

Description

The 301X, 302X and 305X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon random-phase photo triac in a plastic DIP6 package with different lead forming options.

With the robust coplanar double mold structure, 301X, 302X and 305X series provide the most stable isolation feature.


Features

- High isolation 5000 VRMS
- DC input with random-phase photo triac output
- Operating temperature range - 40 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1

Applications

- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals


SCHEMATIC

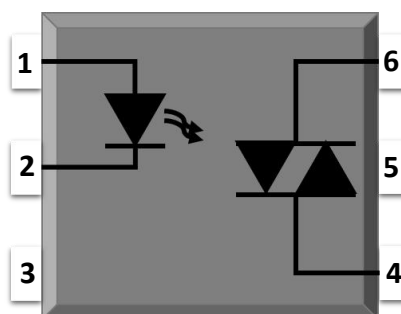

PIN DEFINITION

- | | |
|------------|--------------|
| 1. Anode | 4. Terminal |
| 2. Cathode | 5. Substrate |
| 3. NC | 6. Terminal |

PACKAGE OUTLINE

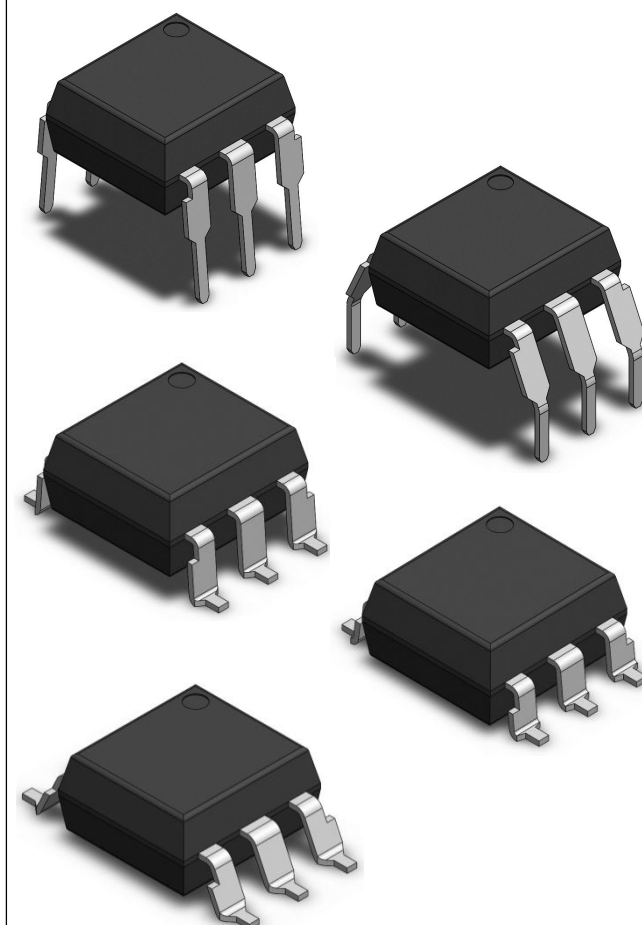

ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	VALUE	UNIT	NOTE
INPUT					
Forward Current		I _F	60	mA	
Reverse Voltage		V _R	6	V	
Junction Temperature		T _j	125	°C	
Input Power Dissipation		P _I	100	mW	
OUTPUT					
Off-state Output Terminal Voltage	301X	V _{DRM}	250	V	
	302X		400		
	305X		600		
Peak Repetitive Surge Current PW=100μs, 120pps		I _{TSM}	1	A	
Junction Temperature		T _j	125	°C	
Output Power Dissipation		P _O	300	mW	
COMMON					
Total Power Dissipation		P _{tot}	400	mW	
Isolation Voltage		V _{iso}	5000	V _{rms}	1
Operating Temperature		T _{opr}	-40~100	°C	
Storage Temperature		T _{stg}	-55~125	°C	
Soldering Temperature		T _{sol}	260	°C	2

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds

ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT								
Forward Voltage		V_F	-	1.24	1.4	V	$I_F=10\text{mA}$	
Reverse Current		I_R	-	-	10	μA	$V_R=6\text{V}$	
Input Capacitance		C_{in}	-	8.5	250	pF	$V=0, f=1\text{kHz}$	
OUTPUT								
Peak Off-state Current, Either Direction		I_{DRM}	-	-	100	nA	$V_{DRM}=\text{Rated } V_{DRM}$ $I_F=0$	3
Peak On-state Current, Either Direction		V_{TM}	-	1.58	2.5	V	$I_{TM}=100\text{mA}$	
Critical Rate of Rise of Off-state Voltage		dV/dt	1000	-	-	V/ μs	$V_{PEAK}=\text{Rated } V_{DRM}$	4
TRANSFER CHARACTERISTICS								
LED Trigger Current	3010,3021,3051	I_{FT}	-	-	15	mA	Terminal Voltage = 3V $I_{TM}=100\text{mA}$	
	3011,3022,3052		-	-	10			
	3012,3023,3053		-	-	5			
Holding Current		I_H	-	257	-	μA		
Isolation Resistance		R_{iso}	10^{12}	10^{14}	-	Ω	DC500V, 40 ~ 60% R.H.	
Floating Capacitance		C_{IO}	-	0.8	-	pF	$V=0, f=1\text{MHz}$	

Note3. Test voltage must be applied within dV/dt rating.

Note4. Refer to Fig.15 & Fig.16

CHARACTERISTIC CURVES

Fig.1 Forward Current vs. Ambient Temperature

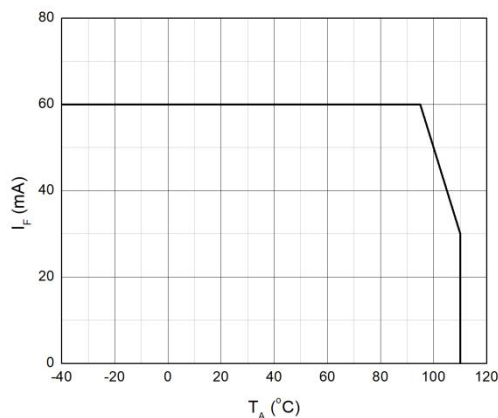


Fig.2 On-state Terminal Current vs. Ambient Temperature

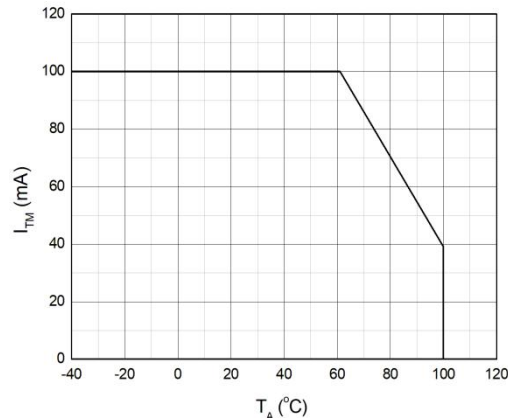


Fig.3 Forward Current vs. Forward Voltage

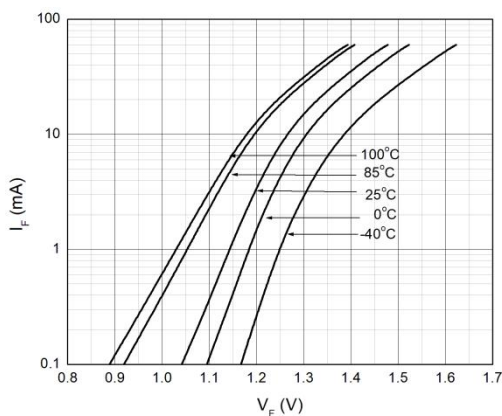


Fig.4 Off-state Terminal Current vs. Ambient Temperature

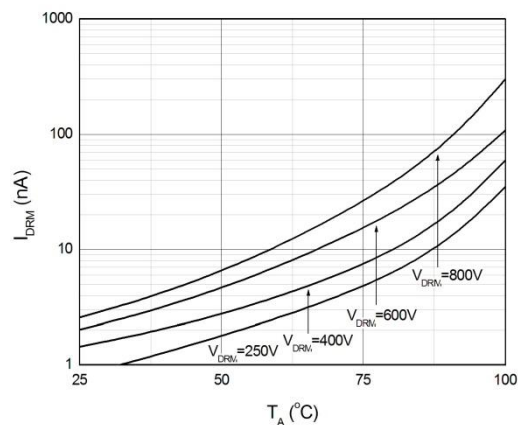


Fig.5 Normalized Off-state Terminal Voltage vs. Ambient Temperature


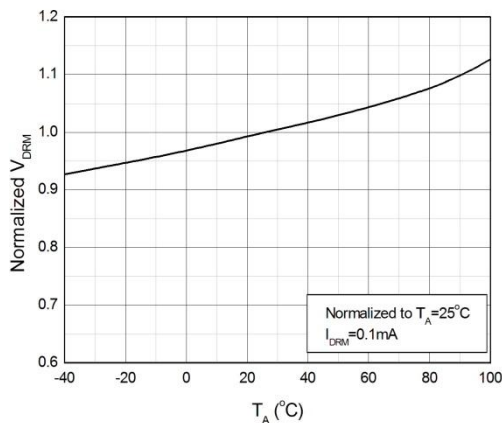


Fig.6 Normalized Trigger Current vs. LED Trigger Pulse Width

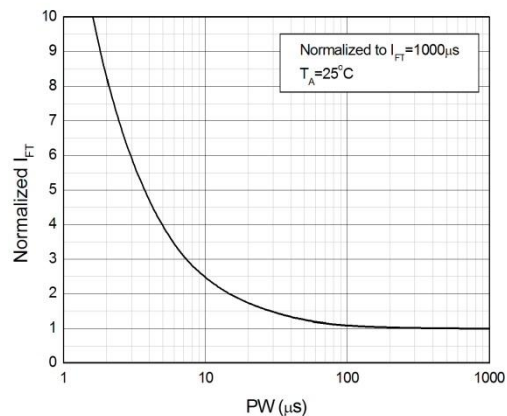

CHARACTERISTIC CURVES

Fig.7 Normalized Trigger Current vs. Ambient Temperature

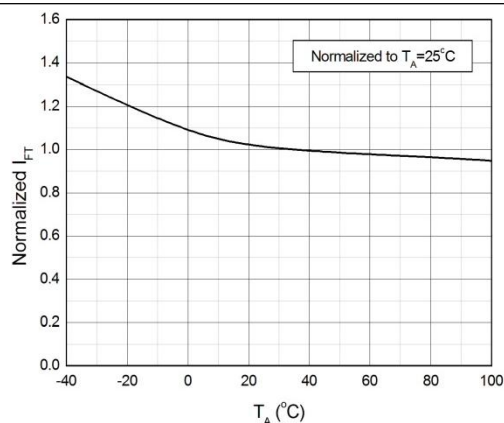


Fig.8 On-state Terminal Voltage vs. Ambient Temperature

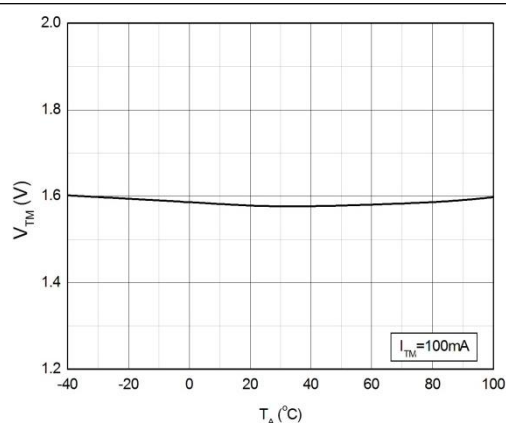


Fig.9 On-state Terminal Voltage vs. On-state Terminal Current

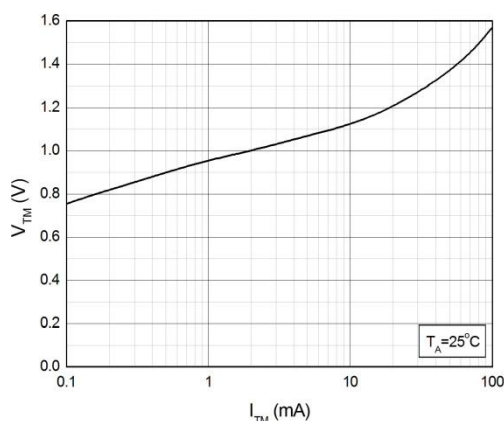


Fig.10 Holding Current vs. Ambient Temperature

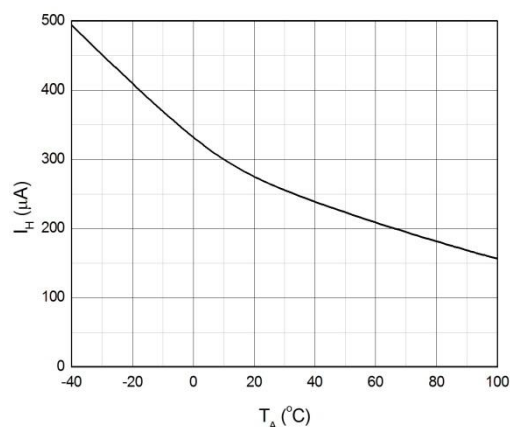


Fig.11 Turn On Time vs. Forward Current


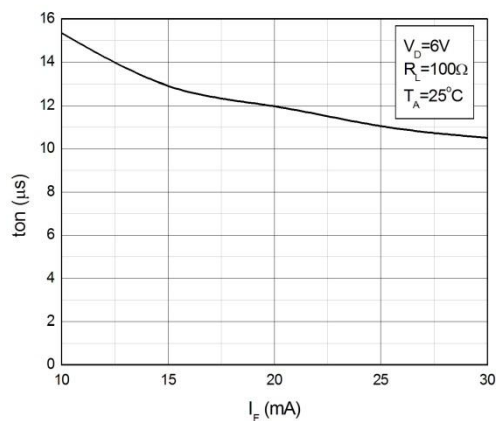


Fig.12 Turn On Time vs. Ambient Temperature

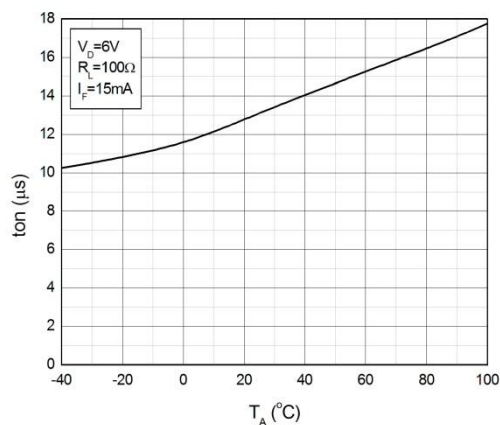

TEST CIRCUITS

Fig.13 Test Circuits of Turn On Time

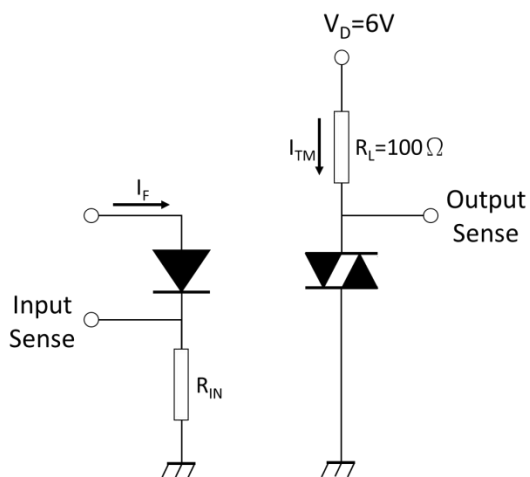


Fig.14 Waveforms of Turn On Time

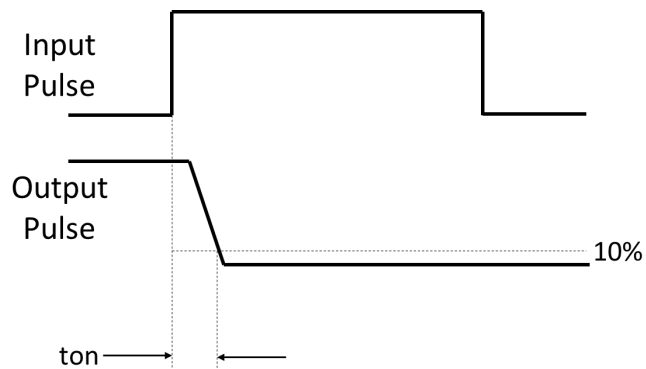


Fig.15 Test Circuits of dV/dt



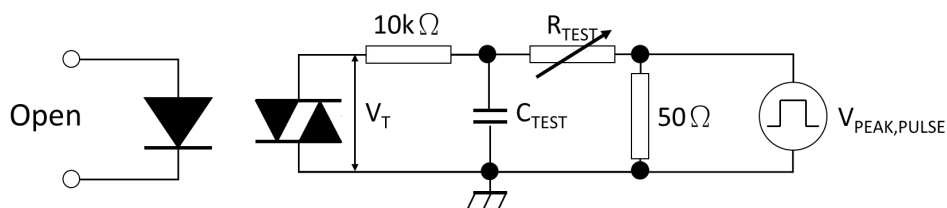


Fig.16 Waveforms of dV/dt

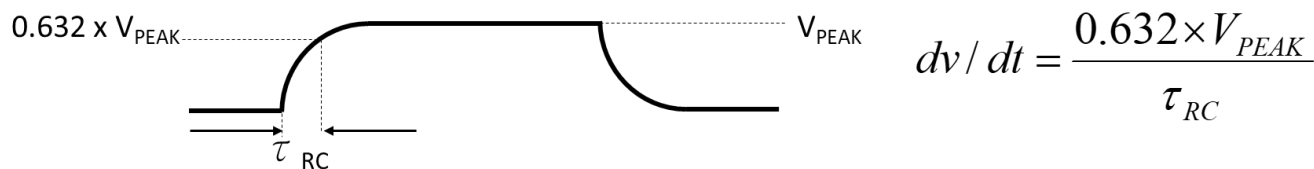


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Standard DIP – Through Hole (DIP Type)

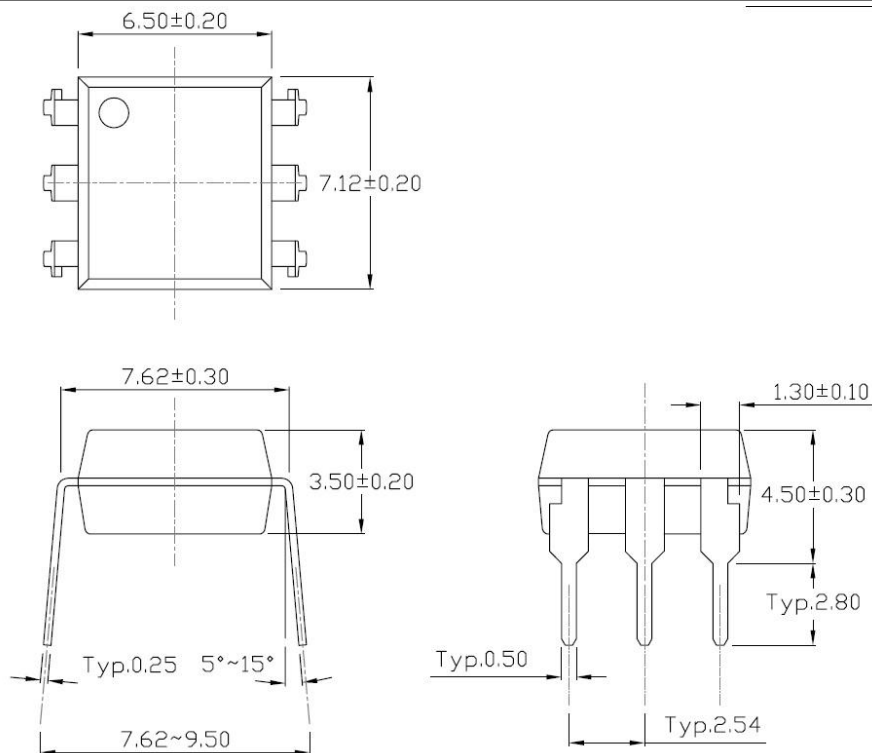


Gullwing (400mil) Lead Forming – Through Hole (M Type)

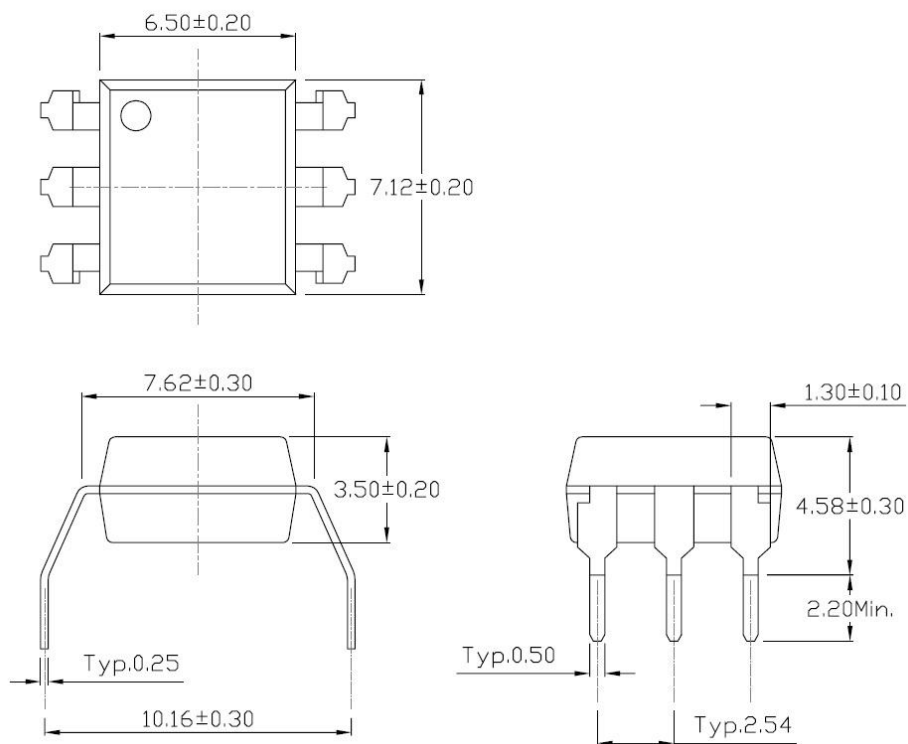


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (S Type)

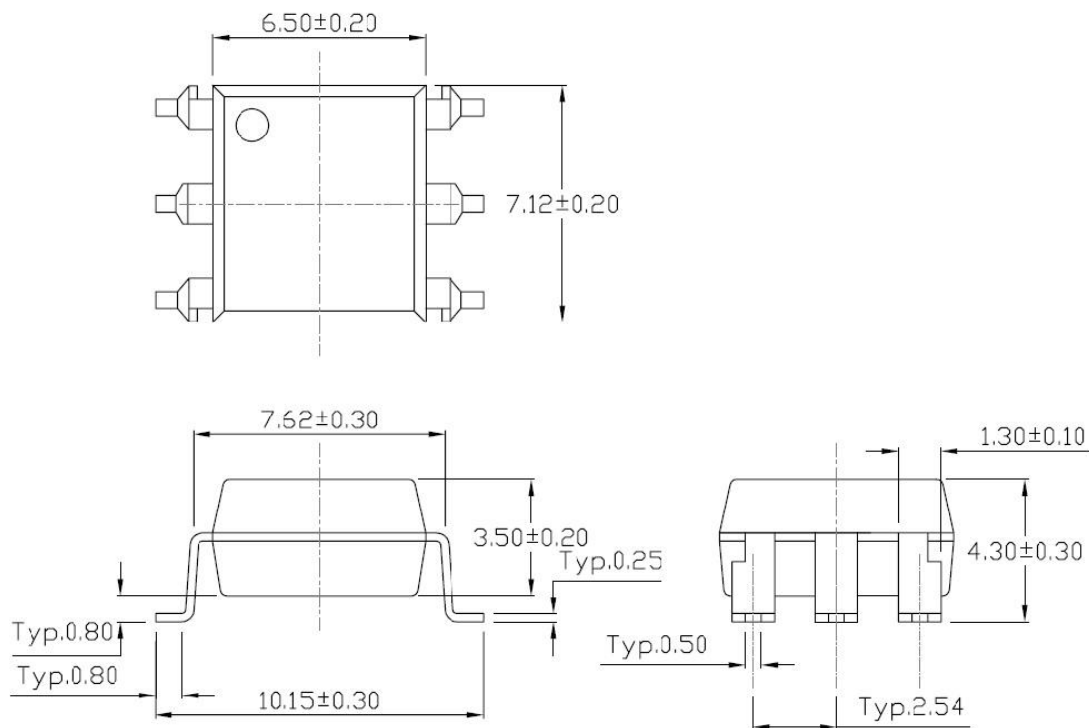


Surface Mount (Low Profile) Lead Forming (SL Type)

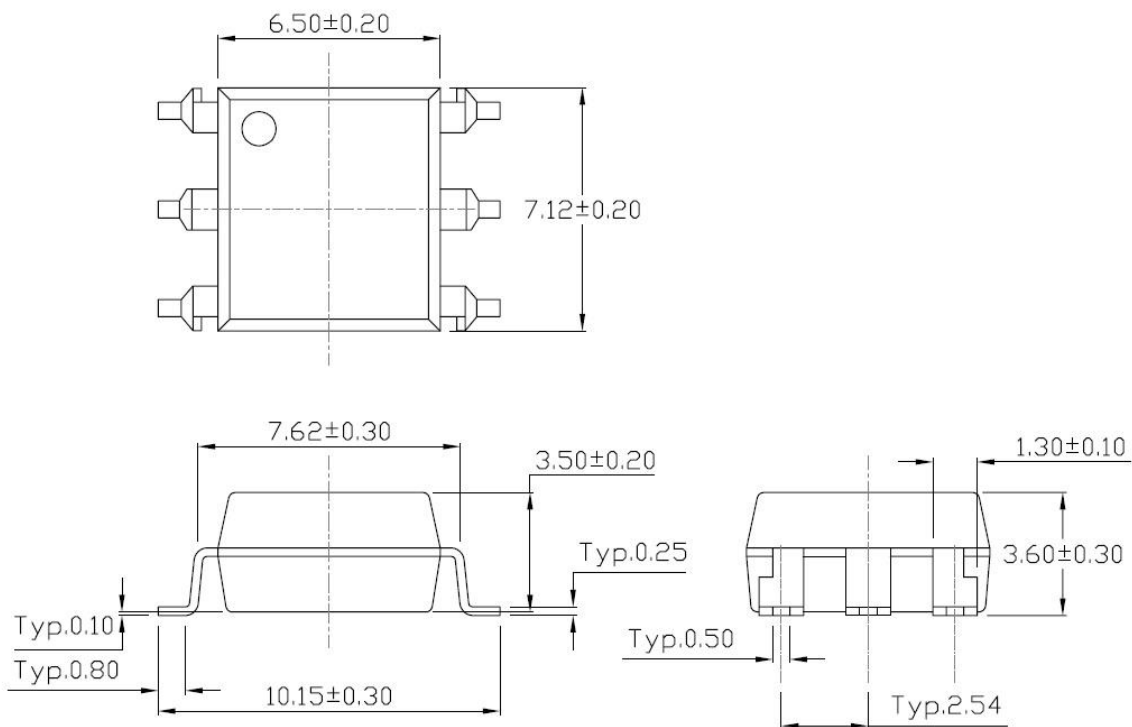


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming

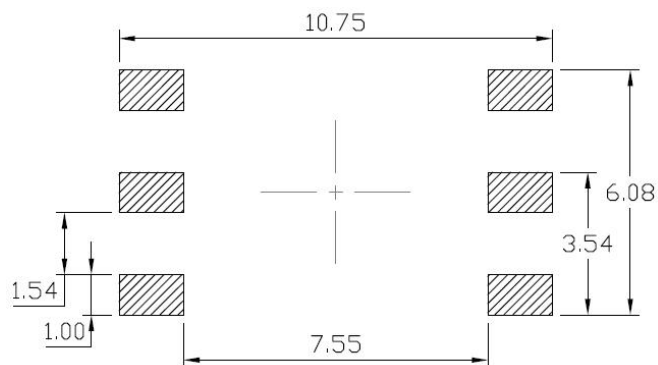


Surface Mount (Gullwing) Lead Forming

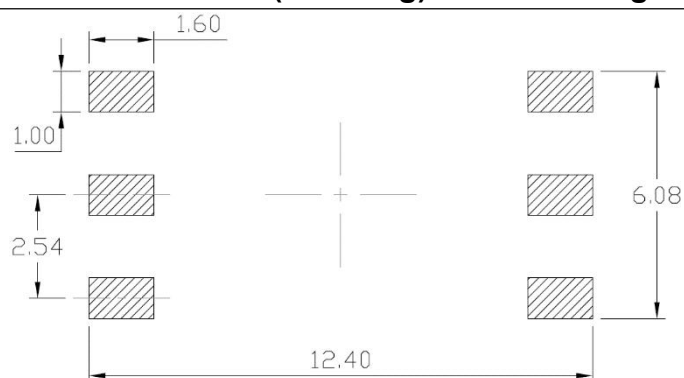


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S(T1) & SL(T1)

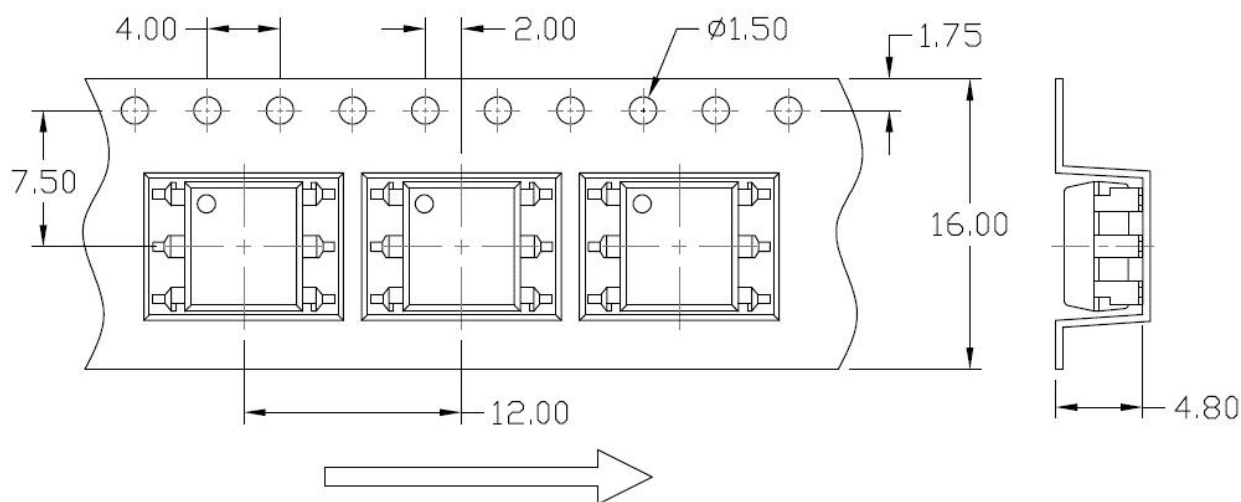


Option S(T2) & SL(T2)

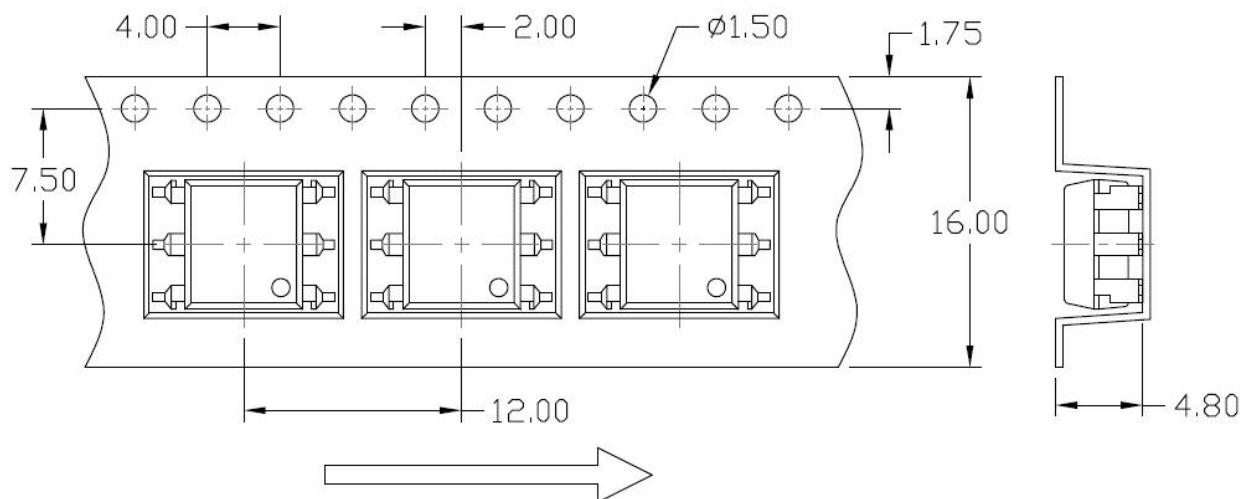

ORDERING AND MARKING INFORMATION

MARKING INFORMATION

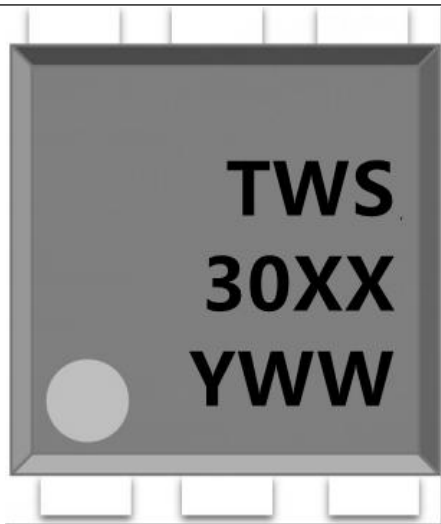


TWS : Company Abbr.
 30XX : Part Number & Rank
 Y : Fiscal Year
 WW : Work Week

ORDERING INFORMATION

TWS30XX(Y)(Z)-G

TWS– Company Abbr.
 30XX – Part Number
 (10/11/12/21/22/23/51/52/53)
 Y – Lead Form Option (M/S/SL/None)
 Z – Tape and Reel Option (T1/T2)
 G – Green Option (G or None)

LABEL INFORMATION

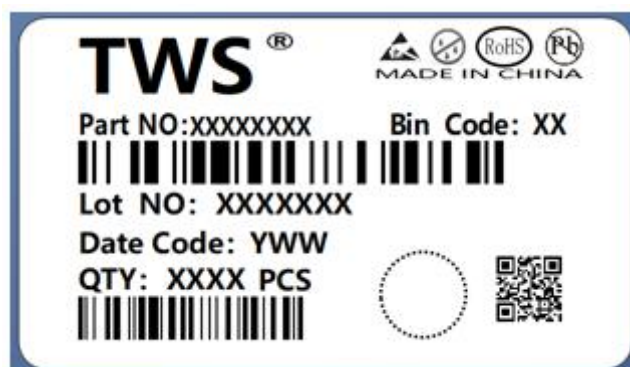


Packing Quantity

Option	Quantity	Quantity – Inner box	Quantity – Outer box
None	50 Units/Tube	32 Tubes/Inner box	10 Inner box/Outer box = 16k Units
M	50 Units/Tube	32 Tubes/Inner box	10 Inner box/Outer box = 16k Units
S(T1)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
S(T2)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
SL(T1)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
SL(T2)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units

REFLOW INFORMATION

REFLOW PROFILE

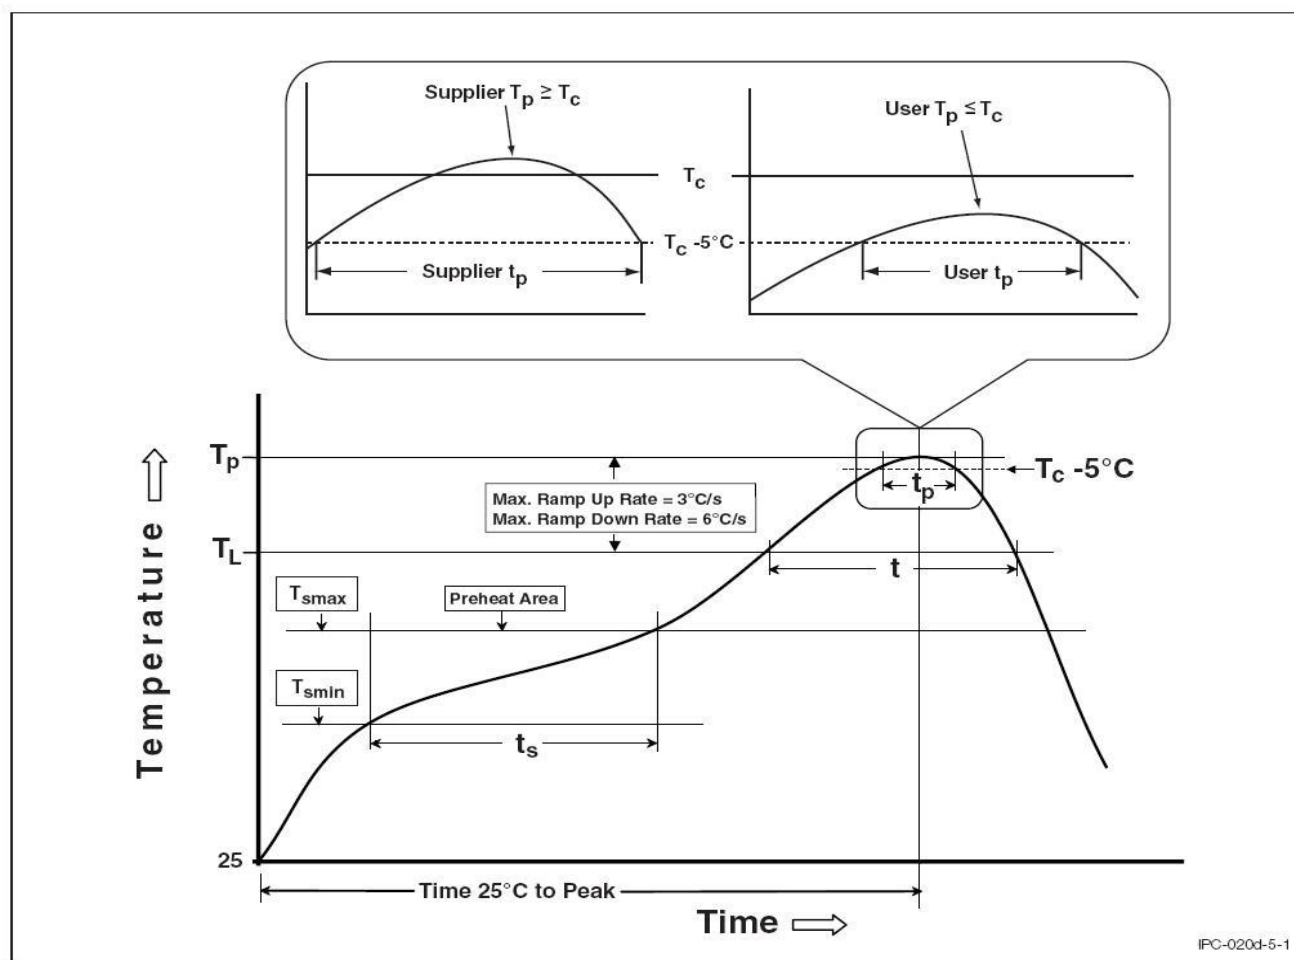

IPC-020d-5-1

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (Tsmmin)	100	150°C
Temperature Max. (Tsmmax)	150	200°C
Time (ts) from (Tsmmin to Tsmmax)	60-120 seconds	60-120 seconds
Ramp-up Rate (tL to tP)	3°C/second max.	3°C/second max.
Liquidous Temperature (TL)	183°C	217°C
Time (tL) Maintained Above (TL)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (tP) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (TP to TL)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.