

CURRENT 30 Ampere
VOLTAGE RANG 45 to 150 Volts


SBT3045VCT THRU SBT30150VFCT

Features

- Low Forward Voltage Drop
- Reliable High Temperature Operation
- Softest, Fast Switching Capability
- 150°C Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

Typical Applications

Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications

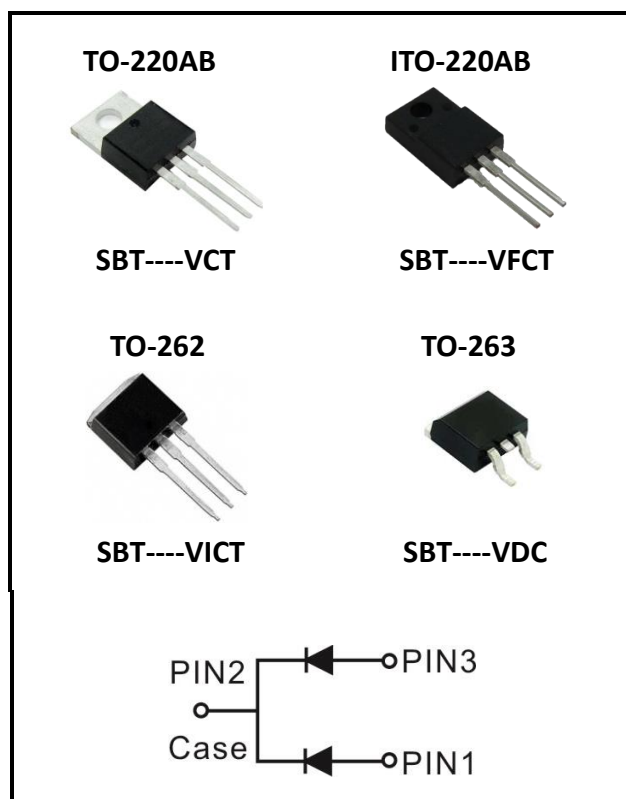

Characteristics

Maximum Ratings Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	SBT3045 VCT/VFCT	SBT3060 VCT/VFCT	SBT30100 VCT/VFCT	SBT30150 VCT/VFCT	Units
DC Blocking Voltage	V _{RM}	45	60	100	150	Volts
Peak Repetitive Reverse Voltage	V _{RRM}					
Average Rectified Forward Current Per device 15A*2	I _o	30				Amps
(Rated V _R -20Khz Square Wave) - 50% duty cycle						
Peak Forward Surge Current - 1/2 60hz	I _{FSM}	250				Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I _{RRM}	2				Amps
Typical Thermal Resistance (per leg) Package = TO-220AB Package = TO-262 TO-263 Package = ITO-220AB	R _{θJc}	2 3 4				℃/W
Human Body Model ESD Protection (TO-220)	ESD HBM	8				
Maximum Rate of Voltage Change (at Rated V _R)	dv/dt	10000				V/uS
Operating Junction Temperature	T _J	- 65 to +150				℃
Storage Junction Temperature	T _{STG}	- 65 to +150				℃

CURRENT 30 Ampere

VOLTAGE RANG 45 to 150 Volts

SBT3045VCT THRU SBT30150VFCT

Electrical Characteristics - (per leg) ($T_A = 25^\circ\text{C}$ unless otherwise specified)

	Parameter	Test Conditions	Symbol		Typ.	Max.	Units
SBT3045VCT/VFCT	Instantaneous Forward Voltage	I _F =6 A	T _j =25℃	V _F *	0.34	-----	Volts
		I _F =15 A			0.45	0.49	
		I _F =6 A	T _j =125℃		0.30	-----	
		I _F =15 A			0.40	0.45	
	Instantaneous Reverse Current	V _R =36 V	T _j =25℃	I _R *	8	-----	uA
		V _R =45 V			18	80	uA
		V _R =36 V	T _j =125℃		-----	-----	mA
		V _R =45 V			-----	10	mA
SBT3060VCT/VFCT	Instantaneous Forward Voltage	I _F =6 A	T _j =25℃	V _F *	0.40	-----	Volts
		I _F =15 A			0.50	0.54	
		I _F =6 A	T _j =125℃		0.34	-----	
		I _F =15 A			0.44	0.48	
	Instantaneous Reverse Current	V _R =42 V	T _j =25℃	I _R *	8	-----	uA
		V _R =60 V			18	80	uA
		V _R =42 V	T _j =125℃		-----	-----	mA
		V _R =60 V			-----	10	mA
SBT30100VCT/VFCT	Instantaneous Forward Voltage	I _F =6 A	T _j =25℃	V _F *	0.52	-----	Volts
		I _F =15 A			0.64	0.70	
		I _F =6 A	T _j =125℃		0.44	-----	
		I _F =15 A			0.58	0.62	
	Instantaneous Reverse Current	V _R =70 V	T _j =25℃	I _R *	8	-----	uA
		V _R =100 V			20	80	uA
		V _R =70 V	T _j =125℃		-----	-----	mA
		V _R =100 V			-----	10	mA
SBT30150VCT/VFCT	Instantaneous Forward Voltage	I _F =6 A	T _j =25℃	V _F *	0.63	-----	Volts
		I _F =15 A			0.73	0.78	
		I _F =6 A	T _j =125℃		0.49	-----	
		I _F =15 A			0.70	0.75	
	Instantaneous Reverse Current	V _R =105 V	T _j =25℃	I _R *	8	-----	uA
		V _R =150 V			20	80	uA
		V _R =105 V	T _j =125℃		-----	-----	mA
		V _R =150 V			-----	10	mA

* Pulse width < 300 μs , Duty cycle < 2%

CURRENT 30 Ampere

VOLTAGE RANG 45 to 150 Volts

SBT3045VCT THRU SBT30150VFCT

RATING AND CHARACTERISTIC CURVES

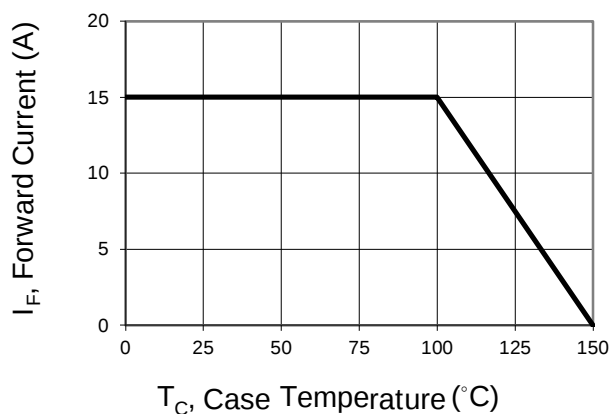


Fig.1 Forward Current Derating Curve

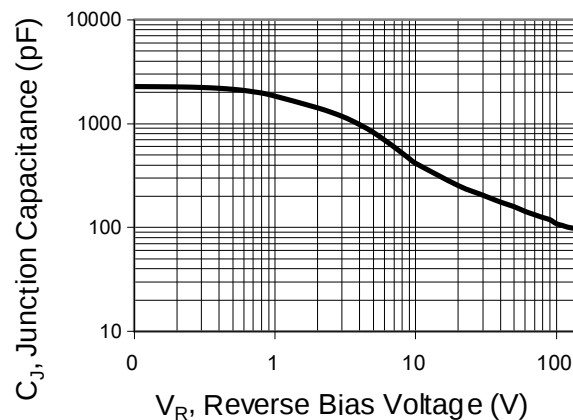


Fig.2 Typical Junction Capacitance

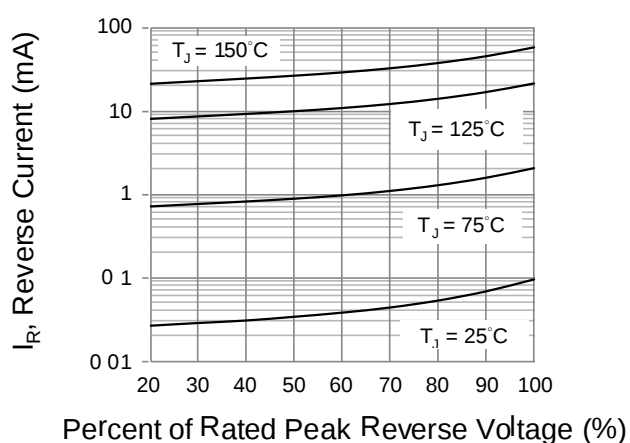


Fig.3 Typical Reverse Characteristics

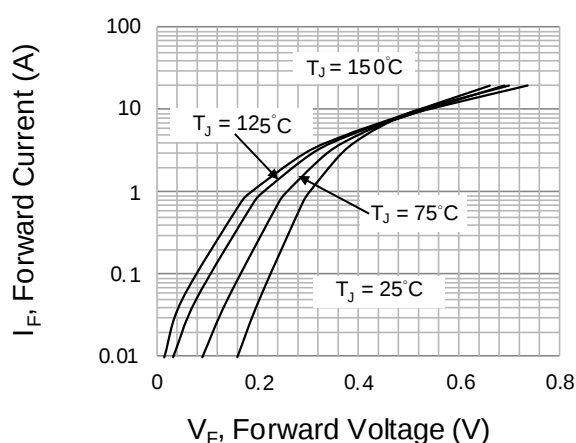




Fig.4 Typical Forward Characteristics

CURRENT 30 Ampere
VOLTAGE RANG 45 to 150 Volts

SBT3045VCT THRU SBT30150VFCT

Package information

Package outline Dimensions millimeters

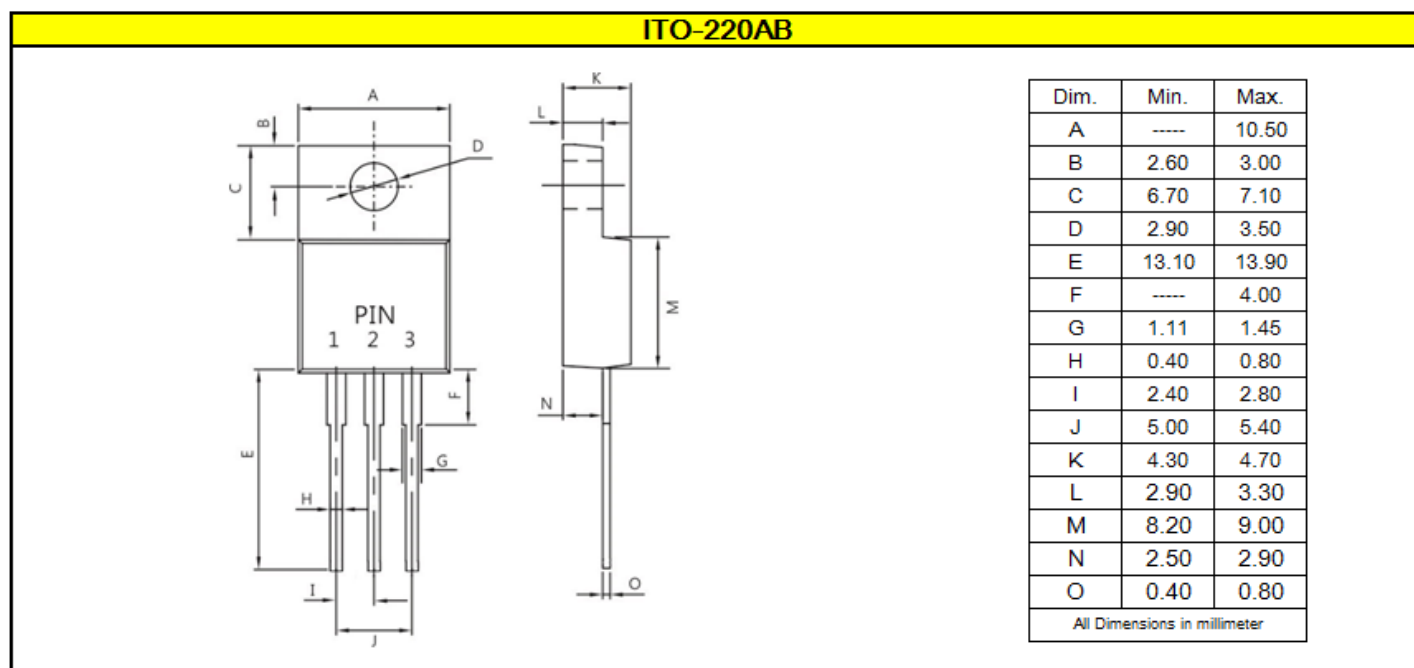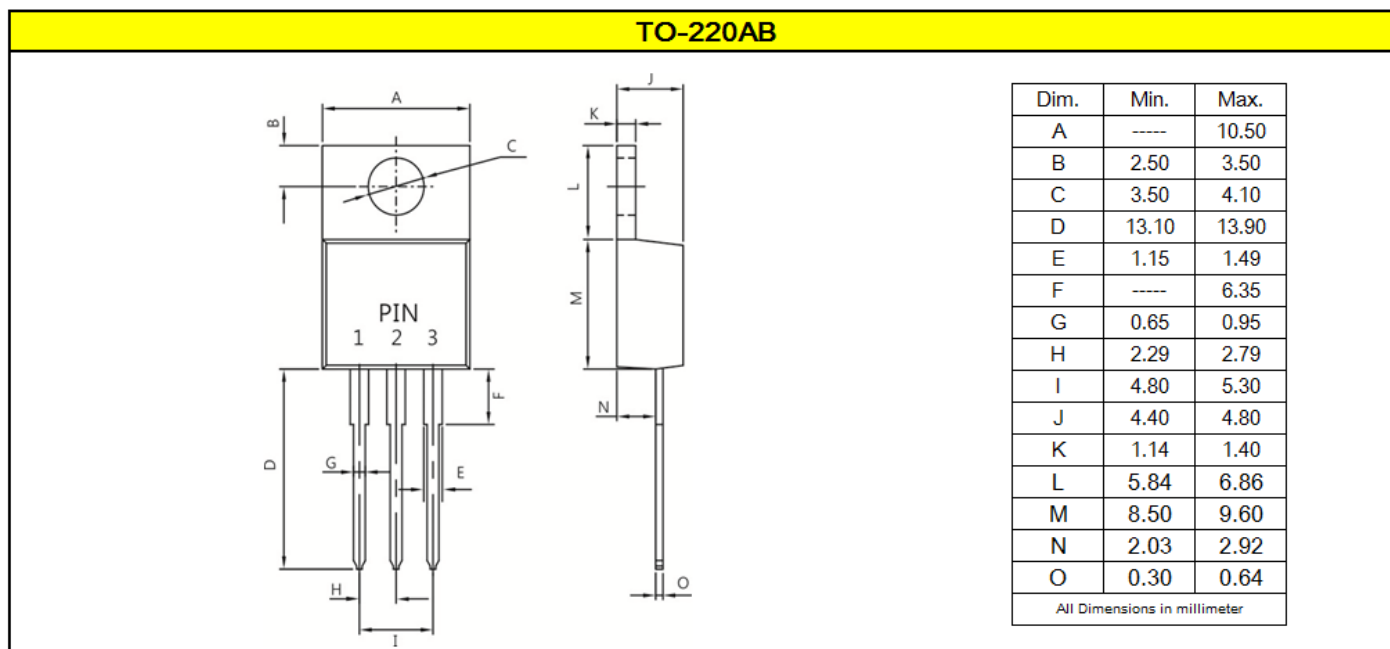


CURRENT 30 Ampere
VOLTAGE RANG 45 to 150 Volts

SBT3045VCT THRU SBT30150VFCT

Package information

Package outline Dimensions millimeters


TO-262 (I²PAK)

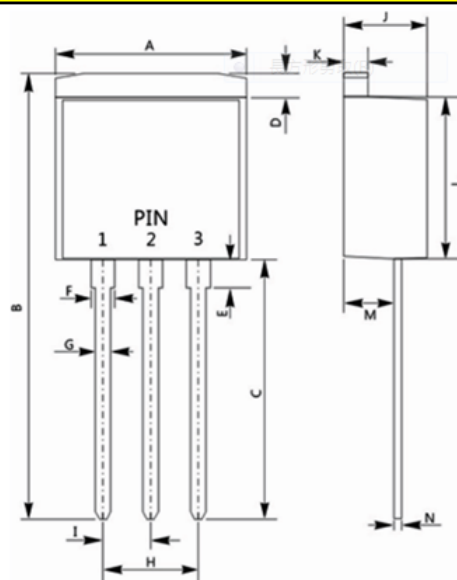

Dim.	Min.	Max.
A	-----	10.40
B	23.44	24.20
C	13.25	14.25
D	1.27	Ref.
E	-----	4.10
F	1.14	1.40
G	0.76	1.00
H	4.95	5.20
I	2.54	Ref.
J	4.40	4.80
K	1.25	1.45
L	8.60	9.00
M	2.50	2.80
N	0.35	0.56

All Dimensions in millimeter

TO-263 (D²PAK)

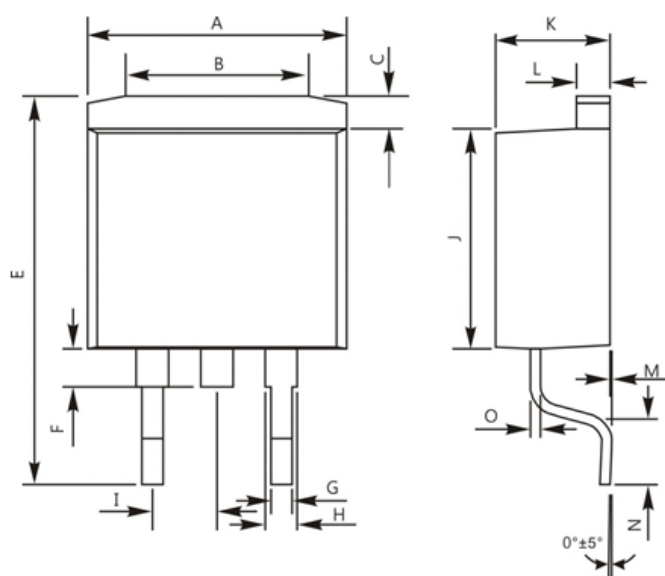

Dim.	Min.	Max.
A	9.65	10.69
B	7.30	Ref.
C	1.30	Ref.
E	14.70	15.90
F	1.5	Ref.
G	0.76	1.00
H	1.14	1.70
I	2.54	Ref.
J	8.55	9.50
K	4.40	4.85
L	1.25	1.50
M	-----	0.25
N	2.30	2.80
O	0.36	0.60

All Dimensions in millimeter