

Description

The 2N7002 is the new generation trench N-channel

MOSFET has been designed to minimize the on-state resistance ($R_{DS(ON)}$) yet maintain superior switching performance, making it ideal for high efficiency power management applications

Features

- 60V, 0.3A, $R_{DS(ON)} = 1.6\Omega @ V_{GS} = 10V$
- Fast Switching Speed
- for extremely low $R_{DS(ON)}$
- Lead-Free, Halogen-Free; RoHS Compliant


Applications

- Power-management functions
- Industrial DC/DC Conversion Circuits
- Backlighting

V_{DSS}	60V
I_D	0.3A
$R_{DS(ON) Typ}$	$1.6\Omega @ V_{GS}=10V$
$R_{DS(ON) Typ}$	$1.8\Omega @ V_{GS}=4.5V$


Outline

SOT-23



Equivalent

- (1) Gate
(2) Source
(3) Drain



Packaging specifications

Part No.	Package	Marking	Basic ordering unit.(pcs)
2N7002	SOT-23		3000

Absolute Maximum Ratings

Parameter		Symbol	Limit	Units
Drain-Source Voltage		V _{DS}	60	V
Gate-Source Voltage		V _{GS}	±20	V
Drain Current-Continuous ^(Note2)	T _C =25°C	I _D	0.3	A
	T _C =70°C		0.24	A
-Pulsed ^(Note 1· Note 2)		I _{DM}	1.5	A
Maximum Power Dissipation	T _C =25°C	P _D	0.7	W
	T _C =70°C		0.46	W
Operating Junction and Storage Temperature Range		T _J , T _{STG}	-55 to 150	°C
Thermal Resistance Junction-Ambient		R _{θJA}	180	°C /W

$c=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V , I _D =250uA	60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V , V _{GS} =0V			1	uA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =250uA	1.0	1.5	2.2	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V , I _D =0.3A		1.6	1.8	Ω
		V _{GS} =4.5V , I _D =0.2A		1.8	2.0	Ω
DYNAMIC CHARACTERISTICS Note4						
Input Capacitance	C _{ISS}	V _{DS} =30V , V _{GS} =0 V , f =1.0MHz		28		pF
Output Capacitance	C _{OSS}			14		pF
Reverse Transfer Capacitance	C _{RSS}			6		pF
Gate resistance	R _g	V _{GS} =0V,V _{DS} =0V, f=1MHz		30		Ω
Total Gate Charge	Q _g	V _{DS} =30V , I _D =0.2A , V _{GS} =10V		0.9		nC
Gate-Source Charge	Q _{gs}			0.4		nC
Gate-Drain Charge	Q _{gd}			0.2		nC
SWITCHING CHARACTERISTICS Note4						
Turn-On Delay Time	t _{D(ON)}	V _{DD} =30V , I _D =0.2A , V _{GS} =10V , R _{GEN} =25 Ω		3.2		ns
Rise Time	tr			16		ns
Turn-Off Delay Time	t _{D(OFF)}			11		ns
Fall Time	tf			15		ns
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Diode Forward Voltage	V _{SD}	V _{GS} =0V , I _s =0.2A			1.0	V

Notes:

- 1、Pulse Test Width < 300us, Duty Cycle < 2%
- 2、Drain current limited by maximum junction temperature.
- 3、Guaranteed by design, not subject to production testing.

Fig.1 Continuous Drain Current vs. TC

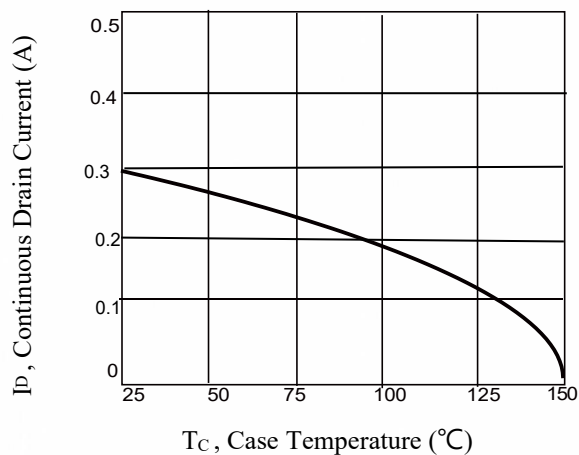


Fig.2 Normalized $R_{DS(ON)}$ vs. T_J

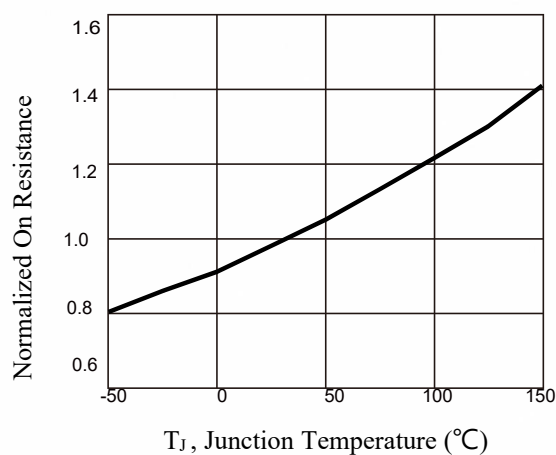


Fig.3 Normalized V_{th} vs. T_J

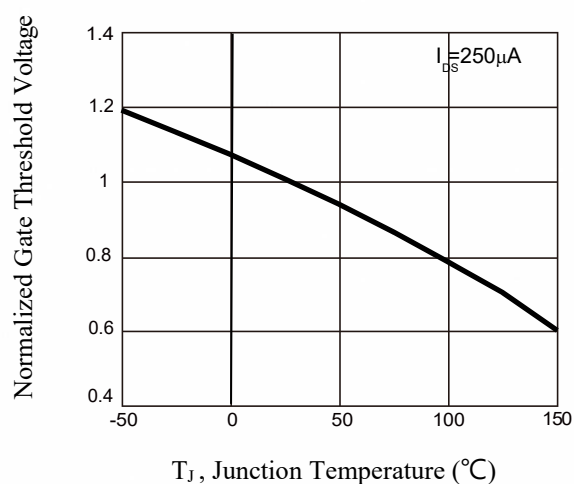


Fig.4 Gate Charge Waveform

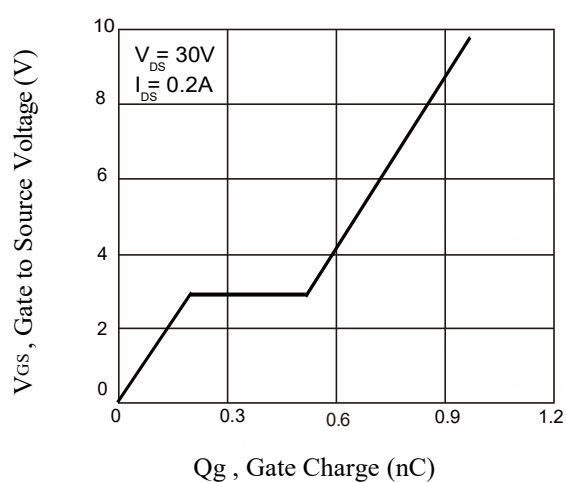


Fig.5 Typical Output Characteristics

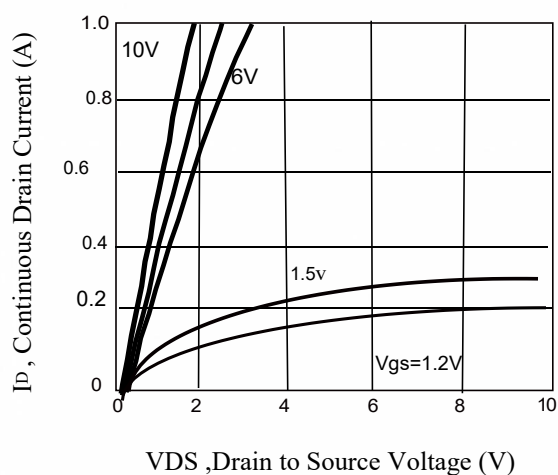


Fig.6 Turn-On Resistance vs. I_D

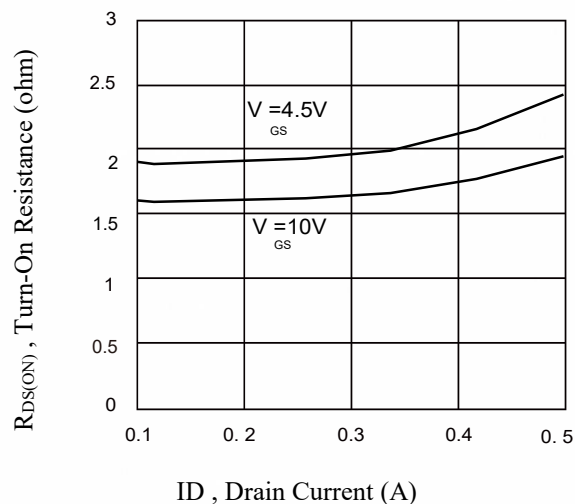


Fig.8 Typical Source-Drain Diode Forward Voltage

Fig.7 Capacitance

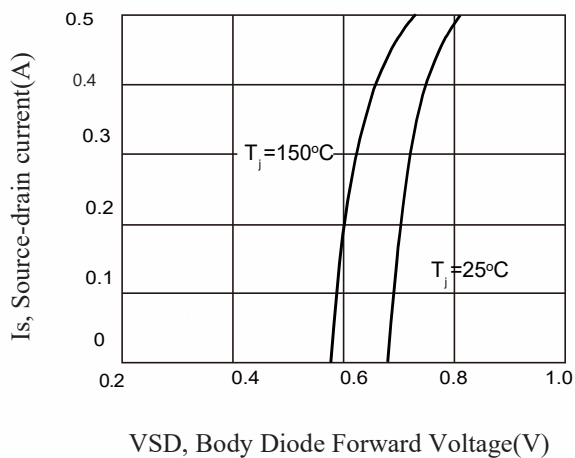
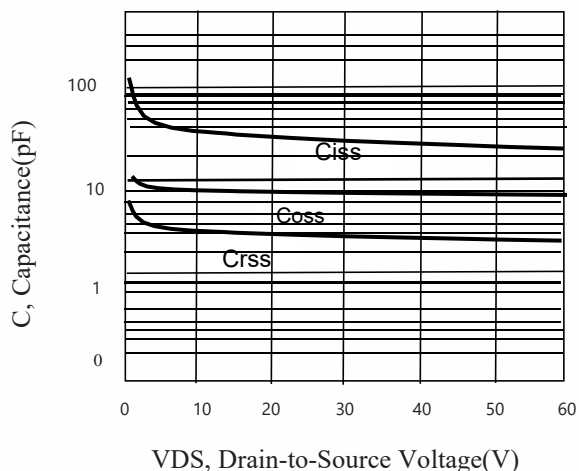


Fig.9 Normalized Transient Impedance

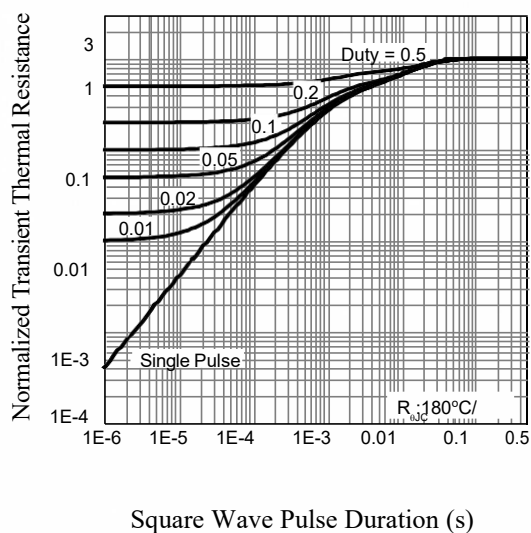


Fig.10 Maximum Safe Operation Area

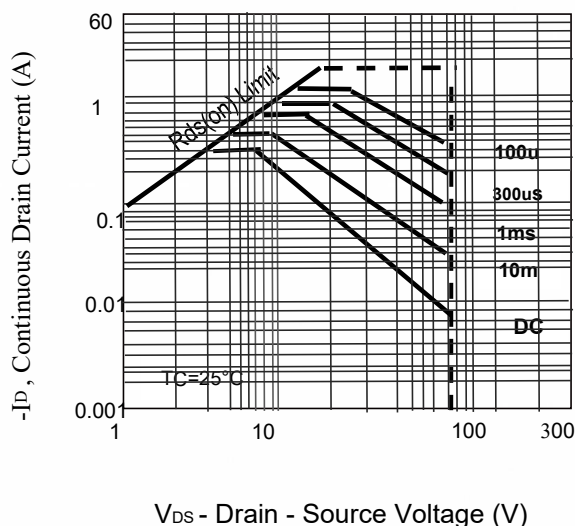


Figure11a. Switching Test Circuit



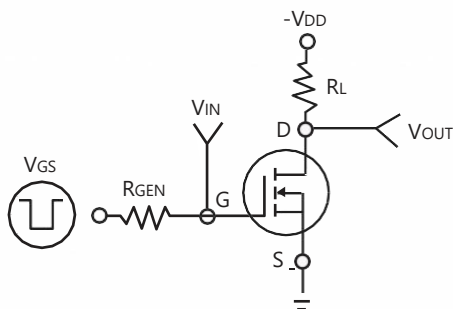


Figure11b. Switching Waveforms

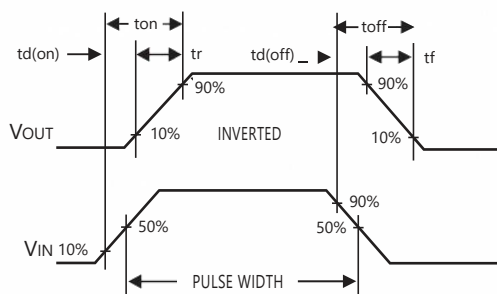

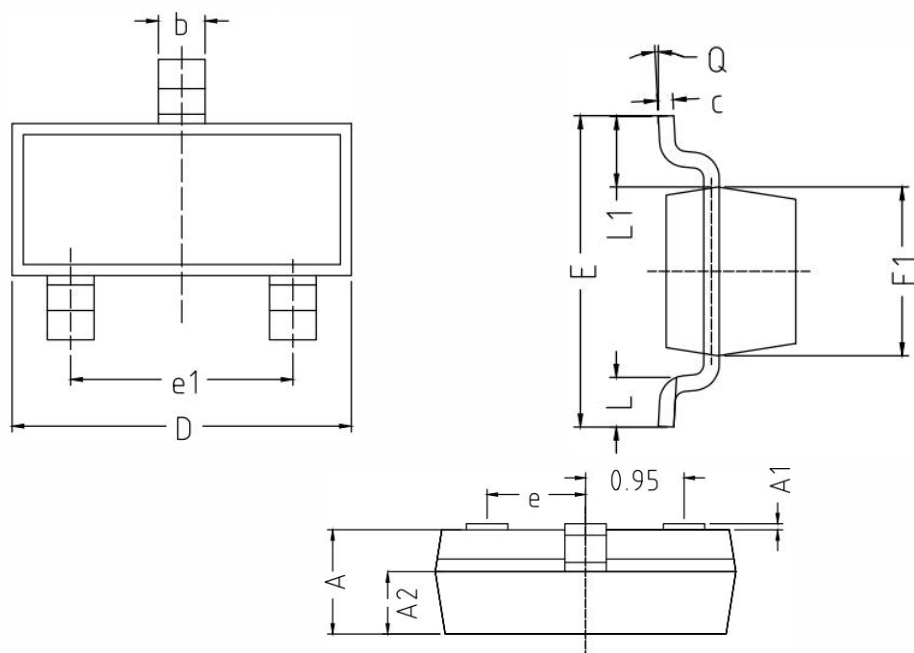

SOT-23 PKG

SYMBOL	MIN	TYP	MAX
A	0.950	1.000	1.050
A1	0.000	0.050	0.100
A2	0.570	0.600	0.630
b	0.350	0.400	0.450
c	0.100	0.130	0.200
D	2.800	2.900	3.000
E	2.250	2.400	2.550
E1	1.200	1.300	1.400
e	0.950 TYP		
e1	1.800	1.900	2.000
L	0.290	0.390	0.490
L1	0.550REF		
Q	0°	4°	8°

NOTICE

NKGL reserves the to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. NKGL does not assume any liability arising out of the application or use of any product described herein.