


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 1.0 Ampere

DO-214AC/SMA

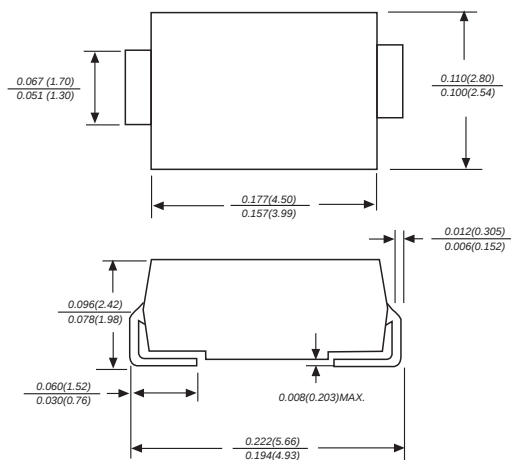

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.002 ounce, 0.07 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog	Number	SYMBOLS	120A	130A	140A	150A	160A	180A	1100A	1150A	1200A	UNITS
Maximum repetitive peak reverse voltage		V _{RRM}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage		V _{RMS}	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage		V _{DC}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T _L (see fig.1)		I _(AV)	1.0									Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	30.0									Amps
Maximum instantaneous forward voltage at 1.0A		V _F	0.45	0.55		0.70		0.85		0.95		Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C		I _R	0.5						0.2		mA	
			10.0				5.0		2.0			
Typical junction capacitance (NOTE 1)		C _J	110			90						pF
Typical thermal resistance (NOTE 2)		R _{θJA}	88.0									°C/W
Operating junction temperature range		T _J	-50 to +125					-50 to +150				°C
Storage temperature range		T _{STG}	-50 to +150									°C


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES KB120A THRU KB1200A


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

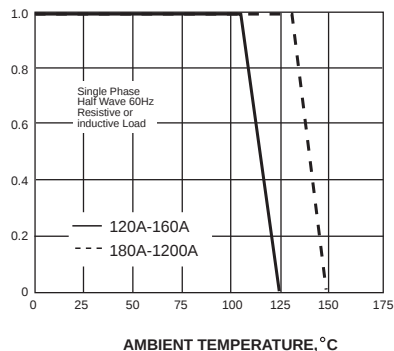


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

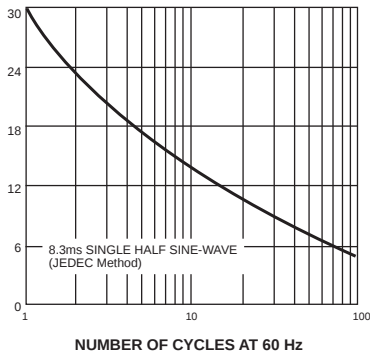


INSTANTANEOUS FORWARD
CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

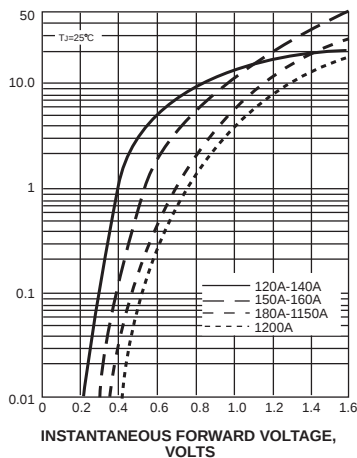


INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

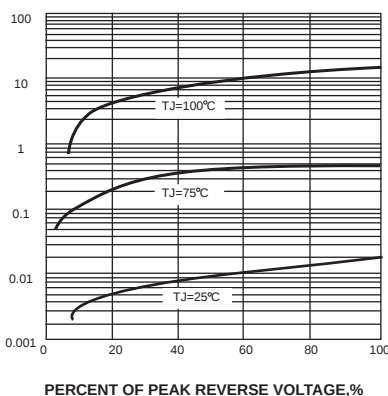

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

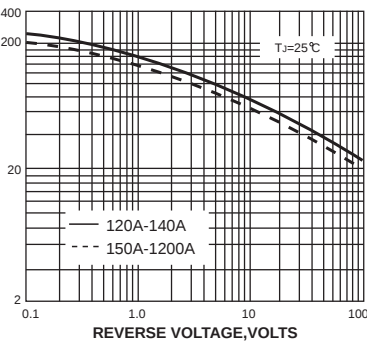

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

