


DO-214AA/SMB

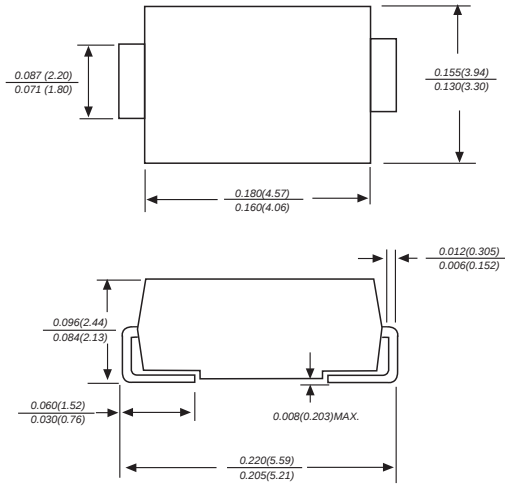

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight : 0.003 ounce, 0.093 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

CatalogNumber	SYMBOLS	220B	230B	240B	250B	260B	280B	2100B	2150B	2200B	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	2.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0									Amps
Maximum instantaneous forward voltage at 2.0A	V _F	0.55			0.70		0.85			0.95	Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5						0.2		mA	
		10.0				5.0		2.0			
Typical junction capacitance (NOTE 1)	C _J	220			180						pF
Typical thermal resistance (NOTE 2)	R _{θJA}	75.0									°C/W
Operating junction temperature range	T _J	-50 to +125					-50 to +150				°C
Storage temperature range	T _{STG}	-50 to +150									°C

FIG. 1- FORWARD CURRENT DERATING CURVE

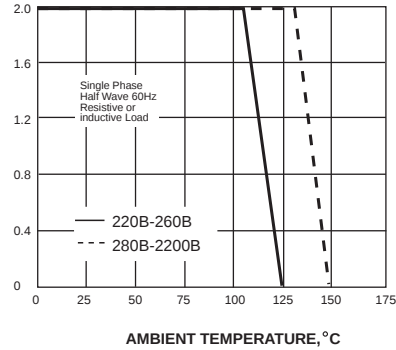


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

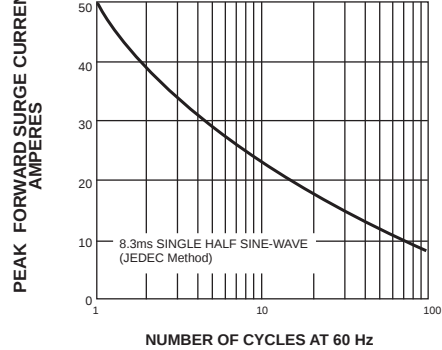


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

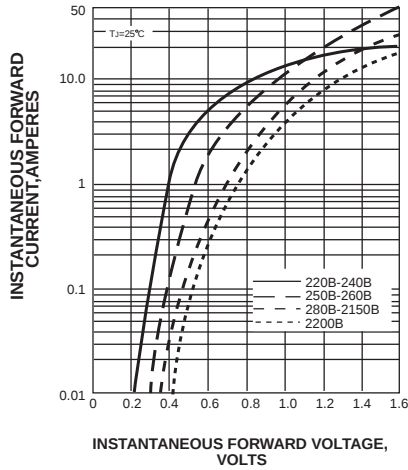


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

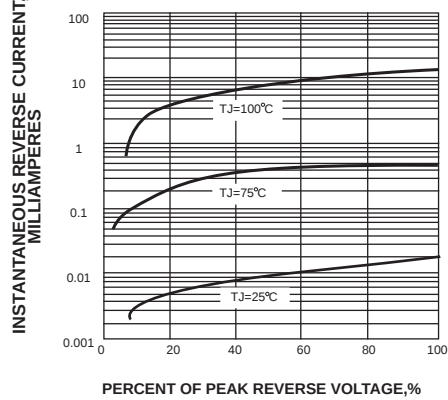


FIG. 5-TYPICAL JUNCTION CAPACITANCE

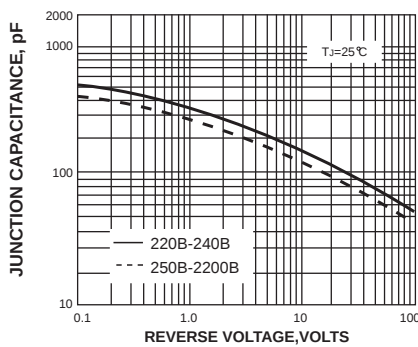


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

