

## HIGH VOLTAGE FAST RECOVERY RECTIFIER

### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case :** JEDEC DO-41/DO-15 Molded plastic body


**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.012 ounce, 0.33 grams(DO-41)

0.014 ounce, 0.40 grams(DO-15)

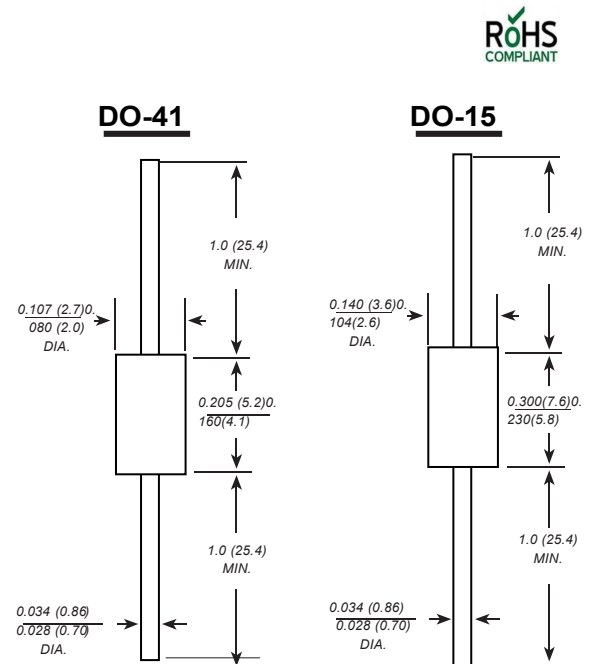

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	R2500F	R3000F	R4000F	R5000F	UNITS
		CRK R2500F	CRK R3000F	CRK R4000F	CRK R5000F	
Marking Code						
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	2500	3000	4000	5000	V
Maximum RMS voltage	V <sub>RMS</sub>	1750	2100	2800	3500	V
Maximum DC blocking voltage	V <sub>DC</sub>	2500	3000	4000	5000	V
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I <sub>(AV)</sub>	0.2				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30.0				A
Maximum instantaneous forward voltage at 0.2A	V <sub>F</sub>	4.0	5.0	6.5		V
Maximum DC reverse current at rated DC blocking voltage T <sub>A</sub> =25°C T <sub>A</sub> =100°C	I <sub>R</sub>	5.0 50.0				μA
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>	500				ns
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	15.0				pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub>	50.0				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150				°C

**Note:** 1.Reverse recovery condition I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B. mounted

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

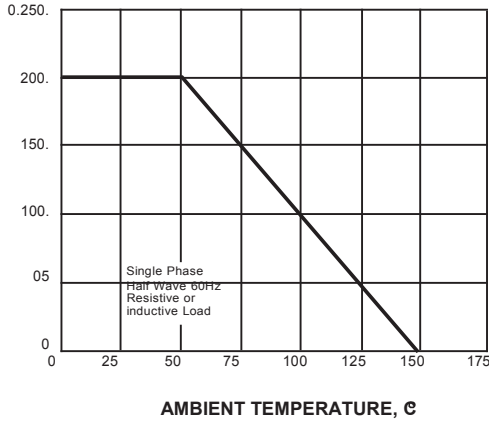


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

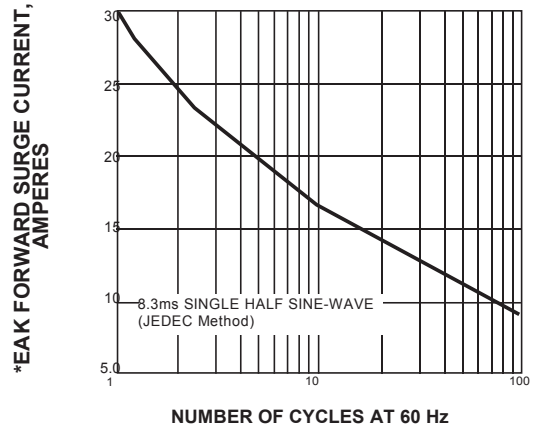


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

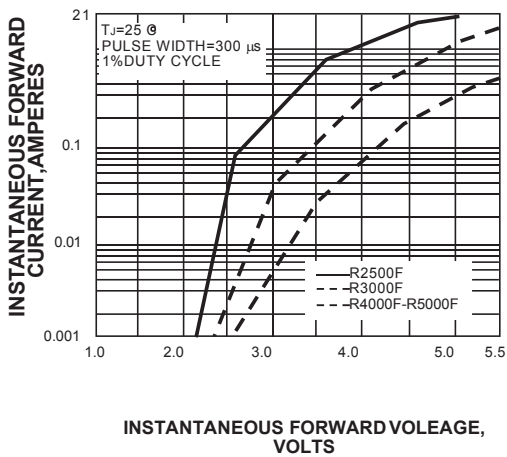


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

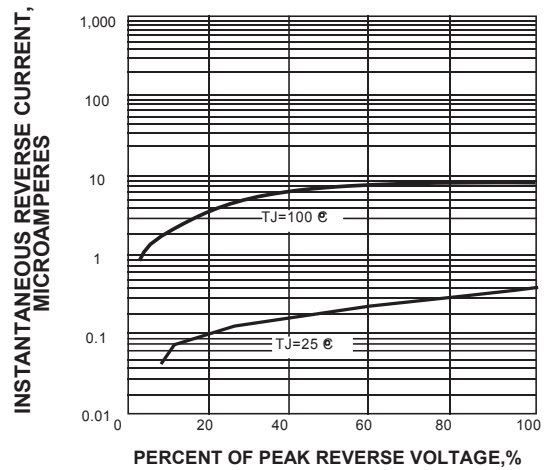


FIG. 5-TYPICAL JUNCTION CAPACITANCE


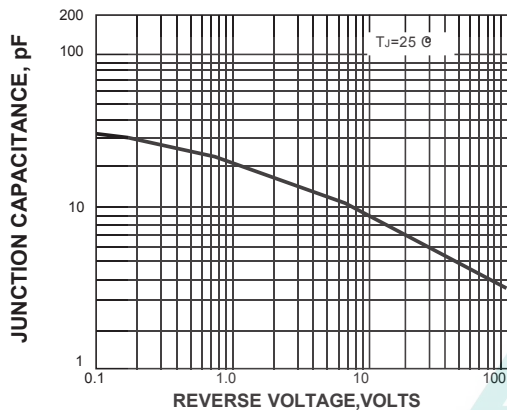


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

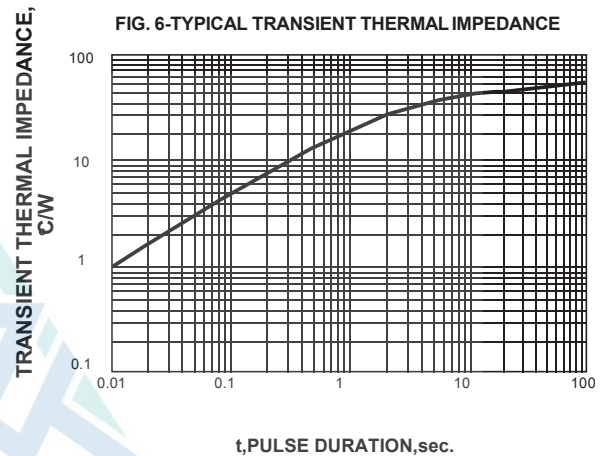

The curve above is for reference only.