





HBT10L200SCT/FCT/DC/CS


SCHOTTKY BARRIER RECTIFIER



TO-220AB/CT




TO-220F/FCT



TO-263/DC



TO-252/CS



FEATURES

- Low forward voltage
- High current capability
- High forward surge capability
- Low power losses, High efficiency
- Guarding for over voltage protection



APPLICATIONS

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

Primary Characteristic

I_O	10A
V_{RRM}	200V
I_{FSM}	350A
V_F	0.67V
T_{jmax}	175°C

MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum,10s per JESD 22-B106

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	V
Working Peak Reverse Voltage	V_{RWM}	200	V
Maximum DC Blocking Voltage	V_{DC}	200	V
Maximum Average Forward Rectified Current	I_O	10	A
Peak Forward Surge Current,8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	350	A
Operating Temperature Range	T_J	175	°C
Storage Temperature Range	T_{STG}	-40 to +175	°C
Typical Thermal Resistance (Note1) TO-220AB,TO-263	$R_{\theta JC}$	2	°C/W
TO-220F		4	

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

Electrical Characteristics (Per Leg) unless otherwise specified

Characteristics		Symbol	Value		Unit
Forward Voltage Drop(Note2)		V_F	Typ.	Max.	V
at $I_F=3A$	TA=25°C		0.72	-	
	TA=125°C		0.55	-	
at $I_F=5A$	TA=25°C		0.75	-	
	TA=125°C		0.60	-	
at $I_F=10A$	TA=25°C		0.80	0.87	
	TA=125°C		0.67	-	
Maximum Reverse Current at $V_R=200V$	TA=25°C	I_R	0.1	0.5	μA
	TA=125°C		160	-	μA

Note2:Pulse test: 300 μs pulse width, 1 % duty cycle



RATINGS AND CHARACTERISTIC CURVES

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

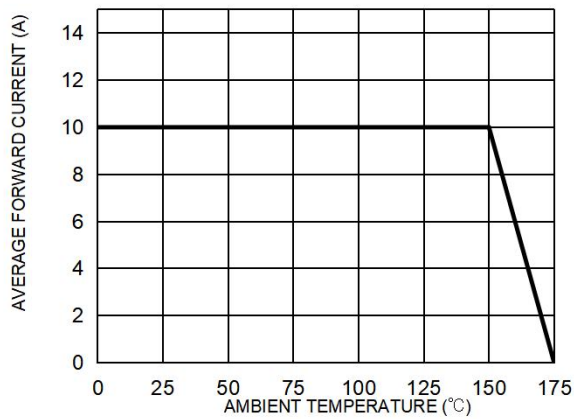


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

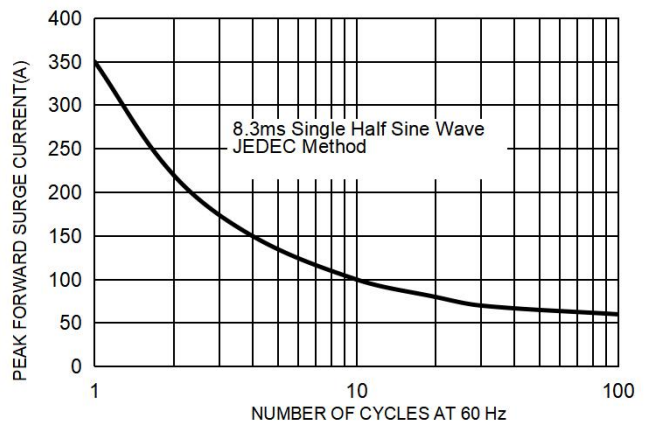


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG


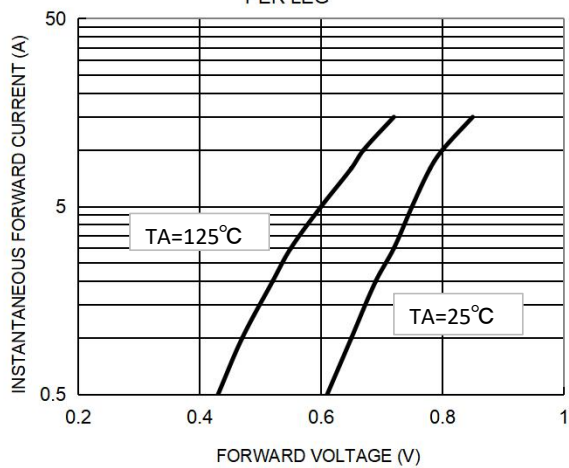


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG




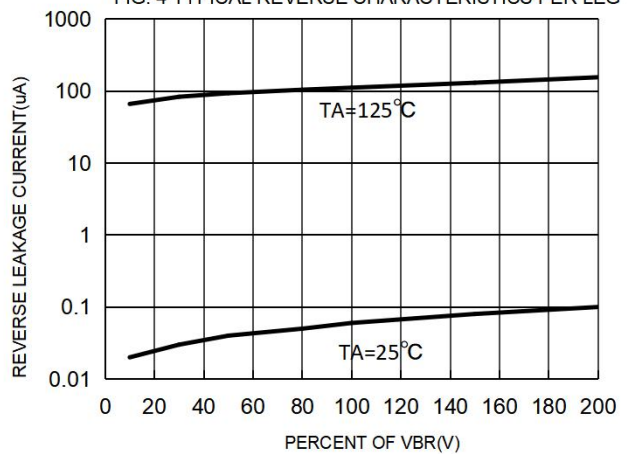


HBT10L200SCT/FCT/DC/CS

Package Outline Dimensions millimeters

TO-220AB

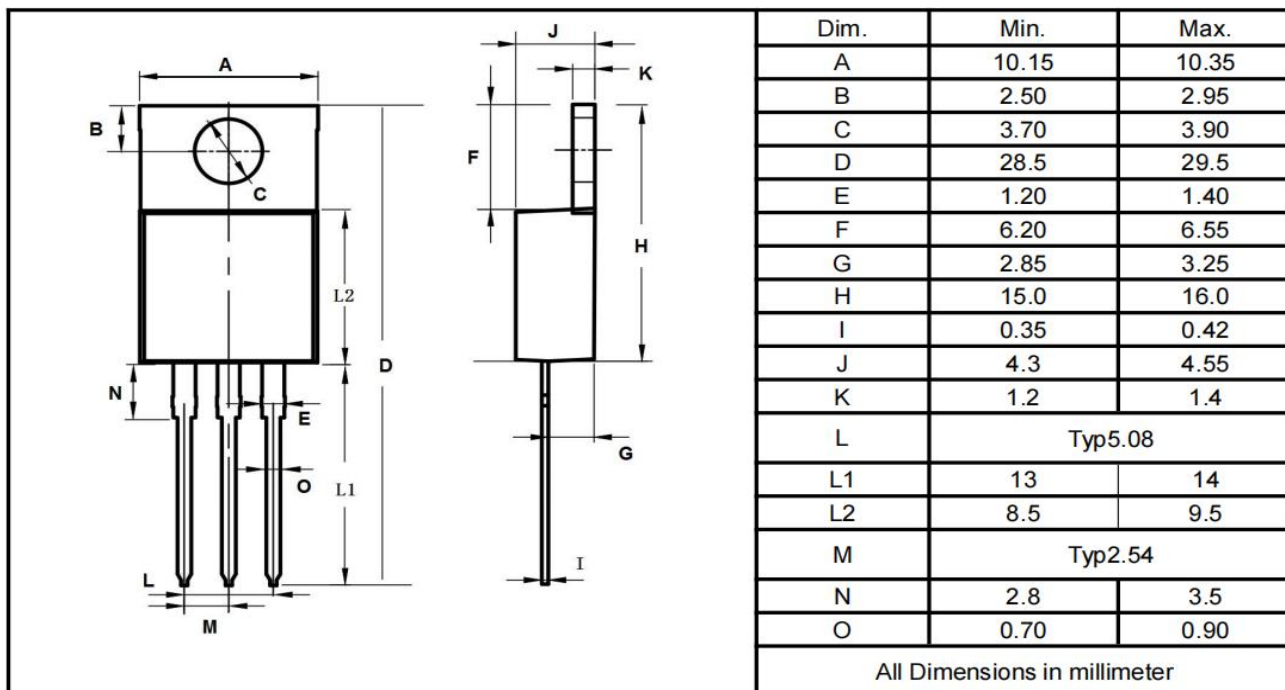

TO-220F

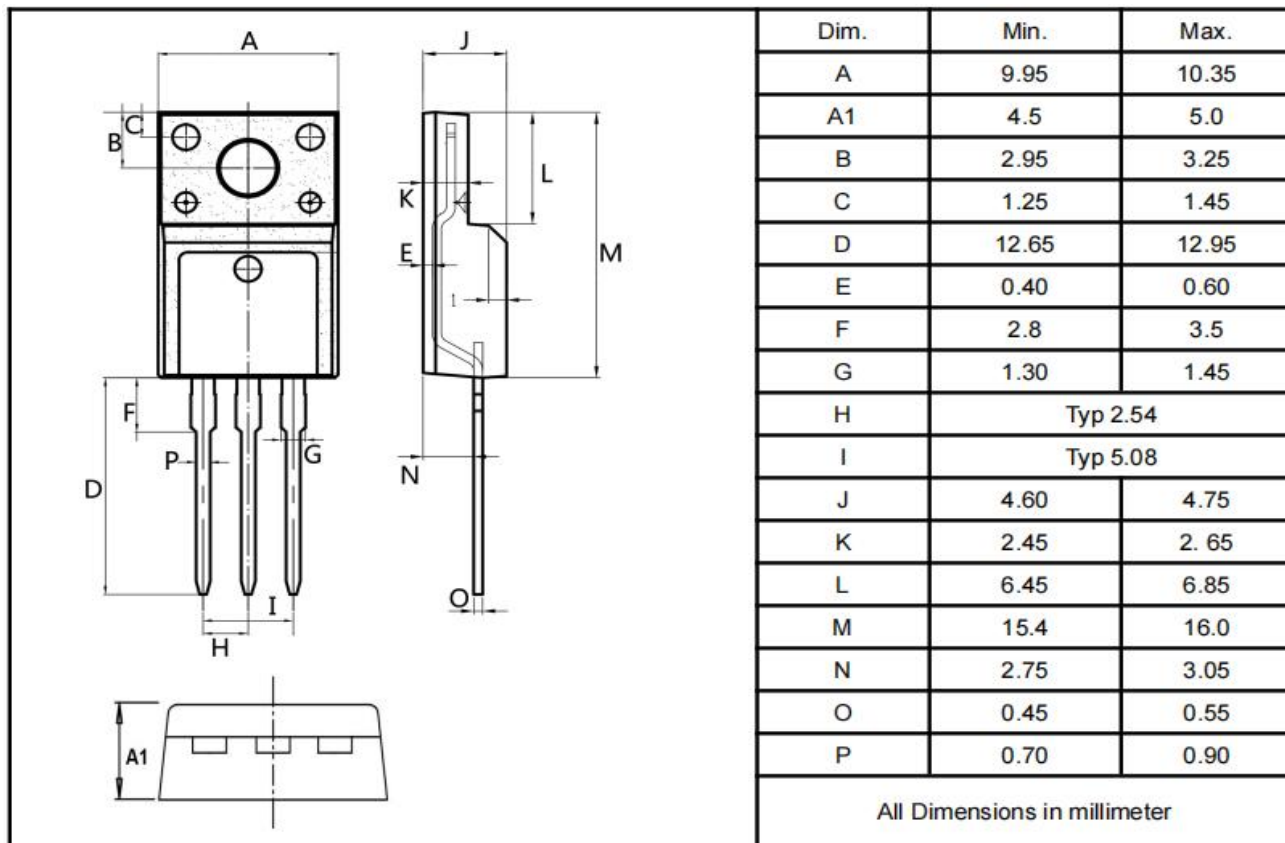





HBT10L200SCT/FCT/DC/CS

Package Outline Dimensions millimeters

T0-263

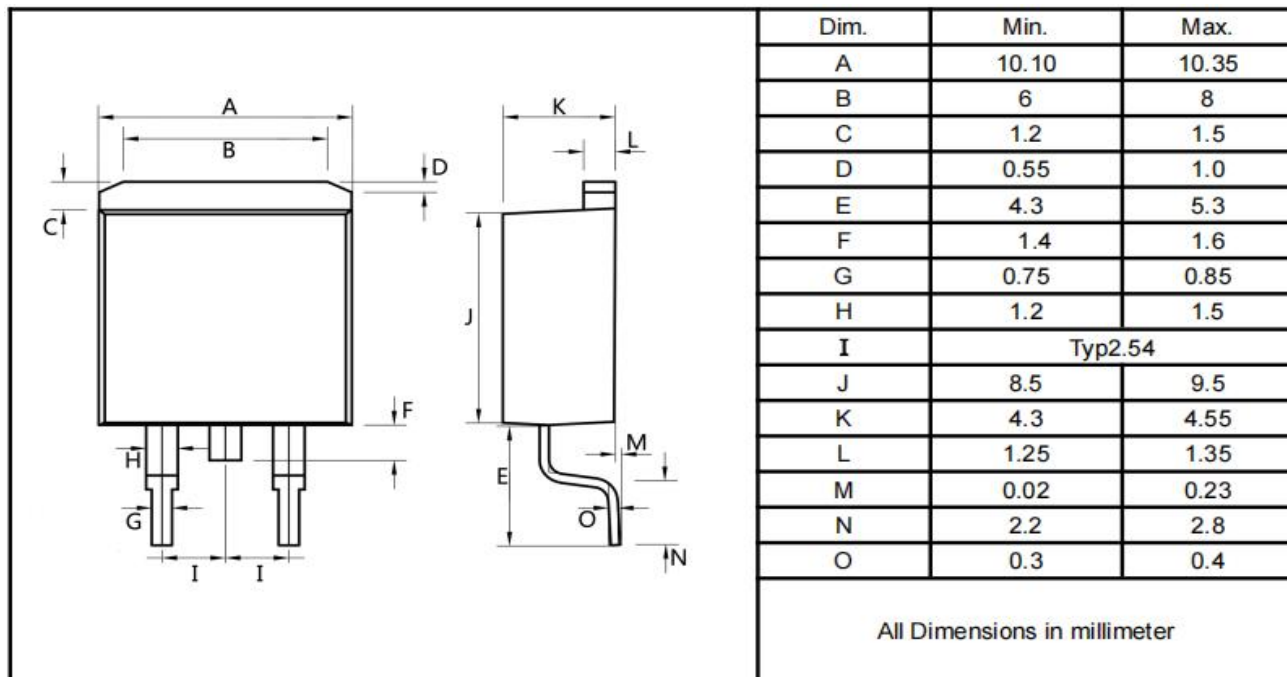


T0-252

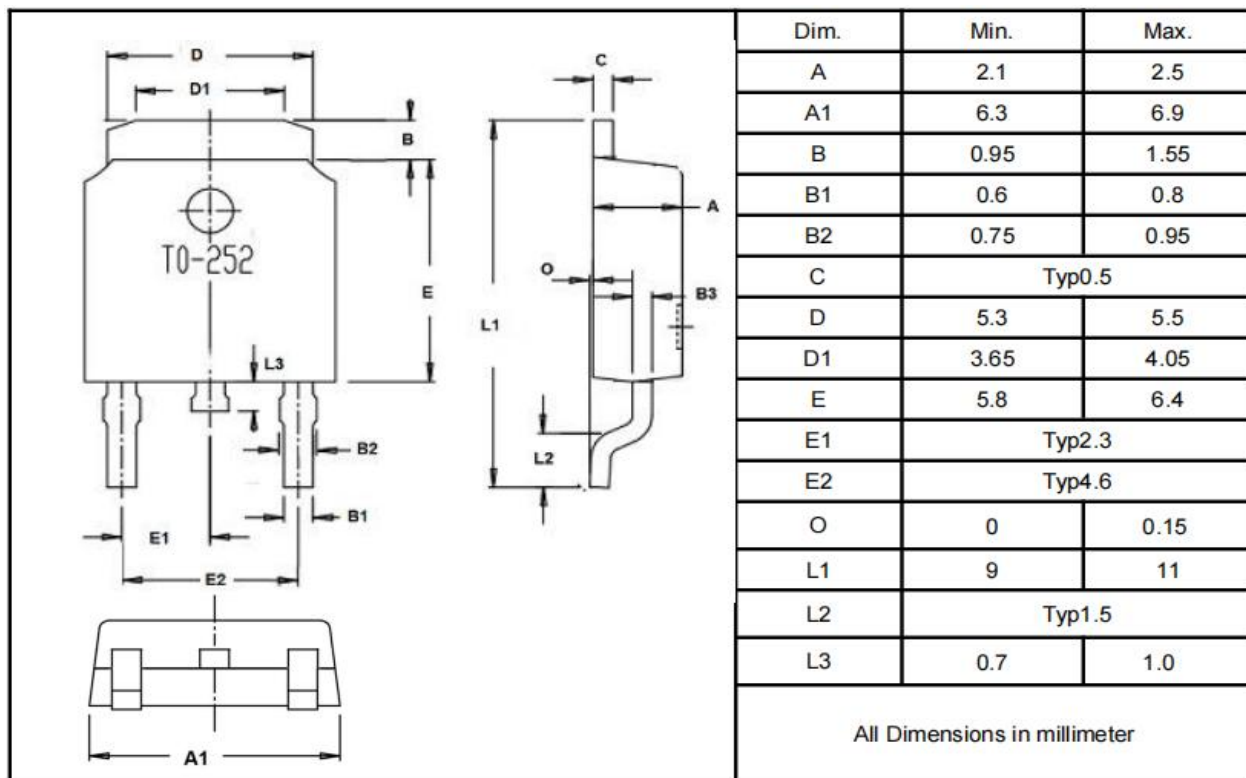



HBT10L200SCT/FCT/DC/CS

Marking on the body


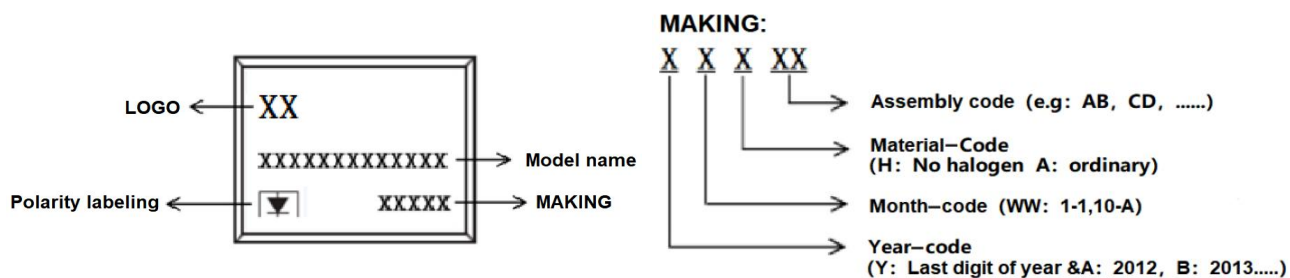









Ordering information

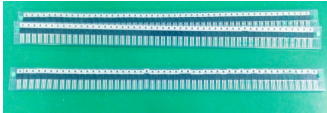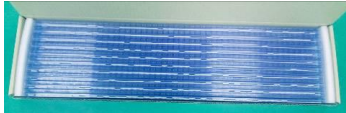Part Number	Package	Unit Weight	Base Quantity	Delivery mode
HBT10L200SCT	TO-220AB	0.07oz(1.96g)	50 pcs / tube	1000pcs/box 5000pcs/carton
HBT10L200SFCT	TO-220F	0.06oz(1.74g)	50 pcs / tube	1000pcs/box 5000pcs/carton
HBT10L200SDC	TO-263	0.04oz(1.16g)	50 pcs / tube	1000pcs/box 5000pcs/carton
HBT10L200SDC-R	TO-263	0.04oz(1.16g)	800 pcs / reel	1600pcs/box 8000pcs/carton
HBT10L200SCS	TO-252	0.011oz(0.32g)	2500 pcs / reel	2500pcs/box 12500pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

packing instruction

PKG	最小包装	内盒	外箱
220AB 220F 263			
	50PCS/管	1000pcs/盒	5000pcs/箱
263-R			
	800pcs/盘	1600pcs盒	8000pcs/箱
252			
	2500pcs/盘	5000pcs盒	25000pcs/箱

Notice

1. All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.
2. Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated power;
exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
3. LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.